TECHNIC

Electronic Engineering

Incorporating ... ELECTRONICS, TELEVISION & SHORT WAVE WORLD

VOL. 21 No. 255 | MAY 1949 | PRICE 2/-

THE *New* WINDSOR

Electronic TESTMETER

MODEL 170A

A highly stable D.C. Valve Voltmeter using an external diode probe for R.F. and A.C. measurements. Stability and freedom from zero drift are ensured by careful design and the simplified controls make for ease in handling. For A.C. mains operation, 110-120V and 200-250V 40 100c s.

RANGES

- **D.C. VOLTS.** 0-2.5-10-25-100-250-1,000.
- **D.C. VOLTS x 10.** 0-25-100-250-1,000-2,500-10,000 (with adaptor).
- **R.F., A.F. & A.C. VOLTS.** 0-2.5-10-25-100-250.
- **A.C. VOLTS x 10.** 0-25-100-250-1,000-2,500 (with adaptor).
- **D.C. CURRENT.** 0-100μA-1mA-10mA-100mA-1 Amp-10 Amps.
- **RESISTANCE.** 0.5 ohm-1000 megohms in 6 ranges using internal battery.
- **DECIBELS.** —22db to +43db in 5 ranges.

LIST PRICE £22.10.0

Please write for further details and information on other Windsor and Taylor products.

WINDSOR *and* TAYLOR

Best for TEST EQUIPMENT

TAYLOR ELECTRICAL INSTRUMENTS LTD.

419-424 MONTROSE AVENUE, SLOUGH, BUCKS, ENGLAND

Telephone: Slough 21381 (4 lines) ● *Grams & Cables: Taylins, Slough.*

Vortexion

announce the

"STEREOPHONIC" AMPLIFIER

This new amplifier with triode cathode-coupled output stages has the effect of making the reproduction more like the original than ever before. A small proportion of this improvement results from the reduction of the Doppler effect, which is achieved without lowering the damping factor on the speakers, with the consequent distortion and transient loss which would follow.

When listening to an orchestra the low frequencies are usually heard towards the right, and the high frequencies towards the left. When reproduced through the Vortexion "Stereophonic" amplifier with low and high frequency speakers suitably spaced according to required listening angle, the high and low frequencies are heard in their relative positions simulating the effect and appreciation of the original.

This speaker placing is necessary because our ears are on a horizontal plane. The effect would be lost if our ears were positioned one above the other, as can be proved by inclining the head sideways.

Our efforts to achieve "Stereophonic" results by the use of various choke and capacitor cross-over networks between the amplifier and speakers were unsuccessful, due to the large variation of speaker impedance at various frequencies, unevenly loading the resonant circuits.

After many months of research we finally achieved our aim with what is basically two special low-distortion, high damping factor amplifiers in one, each covering a portion of the audio spectrum with a sharp cut per octave at change-over frequency. The acoustical efficiency of the bass and treble speakers may vary, so a balancing control is fitted to the amplifier. This simplifies the choice of speakers, since each speaker has only a narrow frequency coverage.

The "Stereophonic" amplifier is now in production, and we invite you to hear a demonstration of what we believe to be something new and which will add to your enjoyment of music.

Chassis complete with valves

Price 36½ gns.

VORTEXION LIMITED, 257-261 THE BROADWAY, WIMBLEDON, LONDON, S.W.19

Telephones: LIB 2814 and 6242-3 Telegrams: "Vortexion, Wimble, London"

CLASSIFIED ANNOUNCEMENTS

The charge for these advertisements is twelve words or less 5/- and 4d. for every additional word. Box number 2/- extra, except in the case of advertisements in "Situations Wanted" when it is added free of charge. A remittance must accompany the advertisement. Replies to box numbers should be addressed to: Morgan Bros. (Publishers) Ltd., 28, Essex Street, Strand, London, W.C.2 and marked "Electronic Engineering." Advertisements must be received before the 10th of the month for insertion in the following issue.

OFFICIAL APPOINTMENTS

Vacancies advertised are restricted to persons or employments excepted from the provisions of the Control of Engagement Order, 1947.

B.B.C. invites applications for a number of posts in the Planning and Installation Department (Engineering Division) in London. Applicants should have a good basic knowledge of Electrical Engineering and of Television. A University Degree in Electrical Engineering, or its equivalent, is a desirable qualification. The duties of each post will include the preparation of appropriate specifications for the manufacture of equipment as detailed, the supervision of its installation and subsequent acceptance tests, together with the conduct of office correspondence relating thereto. (a) Five Engineers in the Studio Section: For one of these posts preference will be given to applicants who have had practical and operational experience of television equipment used for recording and transmitting television on film. Applications may be considered from engineers without practical television experience if they have had a wide experience of cinematography and have made a study of the advanced principles of television. The successful applicant will be required to undertake work with cinematographic equipment generally and television recording on film and reproduction from film. For two of these posts applicants should have a considerable practical or operational experience with television cameras and associated equipment, apparatus for scanning film, etc. The duties include planning the installation of such equipment. For the remaining two posts applicants should preferably have had some practical experience of television equipment used for studio or outside broadcast or equivalent purposes. Applications may be considered from engineers without practical television experience if they have had a wide experience of sound equipment for studio purposes and have made a study of the principles of television. The salary for each of the first three posts is in a grade with annual increments of £35 and a maximum salary of £785 per annum, while the salary for the last two posts is in a grade with annual increments of £30 and a maximum salary of £680 per annum. (b) One Engineer in the Radio Section: Applicants must have a specialised knowledge and experience of U.H.F. and microwave transmission equipment, including the technique of wave guides and highly directional antenna systems for use on these frequencies. They must also possess a wide background experience of the principles and practice of radio engineering generally and must be fully conversant with the technique of television transmission. The successful applicant will be required to plan the development of mobile link stations for television purposes in all their aspects, including the use of mobile generator and conversion plant and other ancillary apparatus. The salary for this post is in a grade with annual increments of £35 and a maximum salary of £785 per annum. Applications, stating age, qualifications and experience, and endorsed according to the post applied for, should reach the Engineering Establishment Officer, Broadcasting House, London, W.1, within seven days of the appearance of this advertisement.

THE CIVIL SERVICE COMMISSIONERS give notice of a Supplementary Reconstruction Competition for pensionable appointment to the Assistant (Scientific) Class. Candidates must have attained age 18 by 1st August, 1949, and must produce evidence of thorough experience in the duties of the class gained by service in a Government Department or other civilian scientific establishment or in technical branches of the Forces, covering a minimum of two years in one of the following groups of scientific subjects:—(1) Engineering and Physical Sciences. (2) Chemistry, Bio-chemistry and Metallurgy. (3) Biological Sciences. (4) General (including Geology, Meteorology, general work ranging over two or more of groups (1) to (3) and highly skilled work in laboratory crafts such as Glass-blowing). Candidates born on or after 1st January, 1917, must in addition produce evidence of having reached a prescribed standard of education, particularly in a Science subject. Salary for Assistant Grade, £195-£380 (men), £195-£320 (women); Senior Assistant Grade, £400-£550 (men), £330-£440 (women); rather less outside London. Opportunities for promotion to higher grades. Further particulars and application forms from the Secretary, Civil Service Commission, Scientific Branch, 27 Grosvenor Square, London, W.1. Completed application forms must be returned by 31st May, 1949.

ROYAL NAVY. Short Service Commissions in the Electrical Branch. Short Service Commissions of five years are offered in the Electrical Branch of the Royal Navy to ex-R.N.V.R. officers under 35 years of age on 1st January, 1949, who served in the Torpedo, Special, Electrical or Air Branches and were employed on technical duties connected with radar, wireless, air radio, air electrical or ships' electrical equipments. Candidates will be entered in the substantive rank held on release, with seniority adjusted by the time out of the Service. Promotion will be in accordance with the regulations in force at the time for R.N. officers (e.g. a Lieutenant (L) is at present eligible for promotion to Lieutenant-Commander (L) at eight years' seniority). Officers who complete the full period of five years on the Active List will be eligible for a gratuity of £500 (tax free). Daily rates of pay are as follows:—Sub-Lieutenant (L), 13s.; Lieutenant (L) on promotion, 17s., after two years, 19s., after four years £1 4s., after six years, £1 6s.; Lieutenant-Commander (L) on promotion, £1 12s., thence in biennial increments of 2s. per day to a maximum of £2 2s. Marriage Allowance of £337 per annum if aged 25 or over, or £146 if under 25, is payable, and accommodation and rations are provided free, or allowances in lieu. Apply to the Director, Naval Electrical Department, Admiralty, Queen Anne's Mansions, London, S.W.1, for fuller details and application forms.

MINISTRY OF SUPPLY invites applications for following unestablished posts at the Tropical Testing Establishment, Nigeria:—(1) Senior Scientific Officer to lead a group of Physicists and Engineers studying effect of tropical conditions on Service materials and equipment. Candidates must have a good Honours Degree in Physics or Electrical Engineering, with experience of radio communications or of methods of physical and mechanical testing. (2) Scientific Officer to work on analytical or bio-chemical investigations into deterioration of equipment under tropical conditions. Candidates must have a good Honours Degree in Chemistry, with experience of micro-analysis or bio-chemistry. Starting pay will be assessed on age, qualifications and experience within the following ranges (men only):—Senior Scientific Officer, £700-£900; Scientific Officer, £400-£650. Posts carry F.S.S.U. benefits. Foreign service allowance varying from £200-£680 per annum also payable. Write, quoting A.403/48/A for the S.S.O. (Physicist) or F.429/48/A for the S.O. (Chemist), to Ministry of Labour and National Service, Technical and Scientific Register (K), York House, Kingsway, London, W.C.2, for application form, which should be returned completed by 9th May, 1949.

B.B.C. invites applications for a number of appointments as Engineers and Physicists in the Engineering Research Department, based at Kingswood, Surrey. The posts cover a wide range of scientific research and development in acoustics, low-frequency and high-frequency engineering as applied to sound and television broadcasting. Candidates must have obtained a First- or Second-Class Honours Degree in a Scientific or Engineering subject or in Mathematics, or an equivalent qualification, or possess high professional attainments. The grades of appointment have salary maxima as follows:—£680; £890; £1,100; £1,360; and £1,610 per annum. The starting salaries in each of these grades will be assessed in accordance with qualifications and experience. Applications should be forwarded to the Engineering Establishment Officer, Broadcasting House, London, W.1, and should state age, qualifications, experience and the grade of post applied for.

SITUATIONS VACANT

REQUIRED by a large engineering firm in Lancashire, Technicians experienced in the operation of high frequency induction equipment for the hardening of steel and for brazing, and in the construction of the necessary coil and quenching equipment. Write stating age, experience, and salary required to Box 457, E.E.

TELEVISION Assembly Line Foreman required by expanding manufacturer in North West London area. Applicants must have ability to organise female labour and have extensive and recent experience of quality mass production of television receivers. A permanent post and good salary for a man with the right qualifications. Box 464, E.E.

BUSH RADIO LIMITED. Applications are invited from experienced radio engineers for the following positions: (a) Development work on communications and domestic radio receivers; (b) Development work on test gear for quality control television production and laboratory use. Apply in writing only, giving age, details of experience, qualifications, salary required, etc., to the Labour Manager, Bush Radio Ltd., Power Road, Chiswick, W.4.

WE ARE CONTINUALLY requiring qualified Physicists and experienced Research and Development Engineers, Draughtsmen (Senior and Junior) for radio, television, radar, electronics, speakers; B.Sc. or H.N.C. preferred; also Technical Representatives, Inspectors, Repairers, Service Engineers, etc. Technical Employment Agency, 179 Clapham Road, S.W.9. (BRIxton 3487.)

DEVELOPMENT ELECTRICAL ENGINEERS with design experience of tropicalised components, radar, radio communication, television, audio-frequency or magnetic recording equipment, are needed to fill progressive positions. Qualifications: Degree, or equivalent, in Engineering or Physics, and several years' design experience. Age 30-35. Starting salary, £500 to £800, according to qualifications, experience and responsibility. There are also vacancies for junior qualified applicants. Send full details of experience and qualifications to Personnel Department, E.M.I. Engineering Development, Ltd., Blyth Road, Hayes, Middlesex.

GRADUATE LECTURER in Mathematics required for E.M.I. Electronics College. Applicants should possess a good Degree in Mathematics with Physics, and have knowledge of Radio. Duties include lecturing to City and Guilds Mathematics for Telecommunications V standard. Commencing salary, according to age, qualifications and experience, not less than the appropriate Burnham (Technical) Scale for London district. Superannuation benefits in addition. Apply, giving fullest possible particulars, to Professor H. F. Trewman, M.A.(Cantab.), M.I.E.E., M.I.Mech.E., M.Brit.I.R.E., E.M.I. Institutes Ltd., 43 Grove Park Road, London, W.4.

CHIEF ESTIMATOR required by substantial West of England Engineers manufacturing electronic and other light electrical apparatus and precision instruments. Applicants must have wide experience of estimating this class of manufacture for sales and also of operation planning and rate-fixing. Salary commensurate with experience. Details of experience and salary required to Box 487, E.E.

SALES MANAGER required by substantial progressive West of England Engineers manufacturing electronic and other light electrical apparatus and precision instruments. Applicants must be Engineers with extensive experience of sale of these products in Home and Export markets, advertising and press publicity. Good salary and prospects to man of initiative and proven ability. Details of experience to Box 485, E.E.

ENGLISH ELECTRIC CO. LTD., Stafford, require urgently Electronic Draughtsmen of all grades for research, development and production Drawing Offices. Experience in this field essential. Good conditions and prospects. Please quote Ref. D.O.53 when sending full details to Central Personnel Services, English Electric Co. Ltd., 24/30 Gillingham Street, London, S.W.1.

DESIGNER for small transformers, preferably with knowledge of the application of transformers and chokes to radio circuits. Merseyside area. State age, qualifications and present position and quote Box 491, E.E.

SIEMENS BROTHERS & CO. LTD., Ref. 715/13, Woolwich, S.E.18, invite applications for posts as Senior Engineers in the line telephone transmission laboratory. Suitably qualified applicants only should write, stating details of experience and salary required.

CLASSIFIED ANNOUNCEMENTS (Cont'd.)

DEPUTY DIVISION HEAD required for laboratory responsible for development of carrier current telephone and multi-channel telegraph equipment. Replies from those with suitable experience should give qualifications and salary expected. Permanent and pensionable position with good prospects. Box 522, E.E.

LOW POWER radio transmitter design engineer required. Qualifications Engineering or Physics Degree or equivalent and industrial experience of transmitter design. Salary according to qualifications and experience. Pensionable position on permanent staff. Box 523, E.E.

ENGINEERING REPRESENTATIVE for leading London automobile radio equipment producers. Only applicants with sound technical training and experience in comparable field need apply. Excellent prospects; salary according to experience. Box 521, E.E.

DEVELOPMENT ENGINEER. A vacancy occurs in the laboratory of a well-known Lamp Company in the North for a young Graduate Electrical Engineer or Physicist, able to work on the design of control equipment associated with discharge lamps, and preferably with some experience of high vacuum technique. Reply to Box 515, E.E.

GOVERNMENT DEPARTMENT situated in North Bucks., has a vacancy for Electronic Engineer experienced in design and operation of U.H.F. and microwave equipment. Salary up to £525 per annum, according to age and qualifications. Hostel accommodation available if required. Write Box 509, E.E.

DRAUGHTSMEN wanted by old-established firm at their Research Laboratories at Borehamwood, Herts. Must be experienced in the layout of wiring of components for Radio and Intercommunication apparatus. Apply, stating experience, age and approximate salary required, to Box 510, E.E.

DRAUGHTSMEN, Senior and Junior, required in Development Drawing Office for new and expanding project by large manufacturer in East London area. Applicants should have had thorough Drawing Office training in Electronics or Light Electrical Engineering. Please state full details, including salary required, to Box 519, E.E.

YOUNG DEVELOPMENT ENGINEER, National or Higher National Certificate standard, for work on relays and similar equipment. Previous experience desirable. Write, stating age, experience and salary required, to Box 493, E.E.

ELECTRONIC ENGINEERS, preferably with factory experience, are required by works situated on the Treforest Trading Estate near Cardiff. Knowledge of the basic principles of design essential. Salary £350-£500. Full details of training and experience to Box 520, E.E.

ENGINEERS with an Honours Degree in Electrical Engineering or Physics, required in the development laboratory of a large company engaged on radio communications work. Full details of technical education, with age and salary required, should be addressed to Box 496, E.E.

ELECTRIC DISCHARGE LAMPS and Fluorescent Tubes. Qualified Technician required for large lamp factory in North of England, able to take charge of technical and quality control, and organise work of junior staff. Graduate preferred and several years' experience of similar work essential. Good remuneration and prospects for man of proved ability. Send full particulars of training and experience to Box 526, E.E.

SENIOR DESIGN DRAUGHTSMAN for mechanical design of television receivers, must have had three years' experience in similar capacity, radio or television. Salary £450 to £550. Minimum age, 25. Write Personnel Manager, Sobell Industries Ltd., Langley Park, Langley, Bucks, stating qualifications and experience.

SENIOR SCIENTIFIC OFFICER. The Telegraph Construction and Maintenance Co. invite applications for senior position in Radio-frequency Electrical Research Laboratory. Honours Degree in Physics or Engineering, with practical experience in electrical measurements essential. Some knowledge of radio desirable. Age about 30. Good prospects and salary for the right man. Contributory Pensions Scheme. Another position, in similar conditions to above, for work on plastic power cable. Some knowledge of behaviour of dielectrics under high electrical stresses essential. Write in the first instance, to Personnel Manager, Telcon Works, Greenwich, S.E. 10, giving age and details of training and experience.

THE UNIVERSITY OF MANCHESTER, Fluid Motion Laboratory. Applications are invited for the post of Lecturer, with qualifications in Electronics, in the Fluid Motion Laboratory. The Lecturer will be required to undertake research on Air Flow, making use of and developing new electronic methods for this work. Qualifications and experience in Electronics are essential, but experience in problems of air flow is not necessary. The salary scale of Lecturers is from £500 to £800 per annum. The initial salary will be according to qualifications and experience. All applications must be sent not later than 31st May, 1949, to the Registrar, The University, Manchester 13, from whom further particulars and forms of application may be obtained.

THE MULLARD Radio Valve Company require Bs.Sc. or equivalent, age 20-35 years, for posts in expanding Development and Production Departments. Some works experience an advantage as the vacancies are for ultimate senior supervisory posts. Salary according to age, experience and qualifications. Apply, giving full details, to the Works Personnel Officer, The Mullard Radio Valve Company, Ltd., New Road, Mitcham Junction, Surrey.

ELECTRONICS MECHANIC required for the Physics Laboratory of the Natural Philosophy Department, University of Aberdeen. Essential qualifications are: experience in layout and construction of complex apparatus from theoretical diagrams; ability to design simple circuits to specification; some general workshop experience, turning, etc. Applicant must be able to work without supervision. Salary, £350 by £15 to £410. Application should be sent to the Secretary, University of Aberdeen, Scotland.

RADIO TESTERS and Fault Finders for Television Test Department, required by leading manufacturers. Applicants must be prepared to reside in the Midland area. Write, stating age, experience and salary required, to Box 500, E.E.

SENIOR ENGINEER required for Electronic Instruments Department to develop microwave and U.H.F. measuring equipment. Reply, stating full details of experience and qualifications, to Box 492, E.E.

CIRCUIT ENGINEER. A well-known London firm has a vacancy for a competent Circuit Engineer in their Transmitting Valve Section. Successful applicant must be capable of designing and building oscillatory test gear for both air- and water-cooled valves; also carrying out experimental work in connexion with valve applications at frequencies up to 100 megacycles. Experience in the high frequency heating field an asset. Write, stating qualifications, experience, age and salary required, to Box 495, E.E.

PRACTICAL RADIO ENGINEERS with extensive experience of communications equipment, required by Development Laboratory of radio manufacturer. Applicants must have at least five years' experience on the development of radio communications equipment and adequate technical knowledge. State age, experience and salary required, to Box 497, E.E.

APPOINTMENT as Departmental Chief of Department engaged on development of microwave radio is offered by large Company in East London area. Applicants must have an Honours Degree in Electrical Engineering or Physics, and must have research experience in connexion with microwave radio or allied work. Kindly state full details, including salary required, to Box 498, E.E.

TECHNICAL SALES ENGINEER required by manufacturer of television components to act as liaison between the Company and its customers. Applicants must have technical qualifications to Degree standard and comprehensive knowledge of the television industry. Kindly write, stating full details, to Box 499, E.E.

LARGE ENGINEERING FIRM in South London has vacancy for a Draughtsman experienced in design of components preferably concerning electro-medical apparatus. Must understand and be capable of circuit layout. Some technical knowledge preferred. Apply to Box EE44, L.P.E., 110 St. Martin's Lane, W.C.2.

ENGINEER with experience in Measurements at R.F. or U.H.F. required by Electronic Instruments Department of the Plessey Company Limited, Ilford. State full details of qualifications, experience and salary required, to the Personnel Manager.

THE FAIREY AVIATION COMPANY LTD., Hayes, Middx., requires Engineers with experience of electro-mechanical servomechanism control circuits or auto-pilot design for Research Divisions, U.K. and Australia. Applicants should be capable of undertaking research and development work on the above. University Degree or equivalent an advantage. Apply Personnel Manager.

WOOLWICH POLYTECHNIC, Woolwich, S.E.18, Physics and Telecommunications Department. The Governing Body invite applications for the post of Laboratory Steward (Physics Department) to assist in the work of preparation and maintenance for classes to Final Degree standard. A knowledge of radio would be an additional qualification. Salary, £275 by £20 to £355. The post is permanent and so provides for pension under Superannuation Scheme, payment for absence through illness, pay for holidays (two weeks Summer, Whitsun and Easter four days each), and use of Refectory for meals, etc. It may be possible to start the salary at a point above the minimum if possessing similar or equivalent experience. Applications, stating age and experience, should be sent to the Clerk of the Governors.

FIRST-CLASS Radio Engineers with experience of communications equipment, required for Development Laboratory of large Company. Applicants should have a Degree in Physics or Electrical Engineering and experience in the radio field. State full details, including salary required, to Box 494, E.E.

ELECTRONICS ENGINEER, capable of design, experimenting and developing industrial circuits. Windsor area. State full particulars, age and salary required. Box 512, E.E.

CHIEF DRAUGHTSMAN required to take charge of Drawing Office engaged on development and production of electronic equipment in Midlands. Must be fully experienced electronic draughtsman capable of leading a team of draughtsmen. Please quote Ref. D.O.54 and send full details and salary required to Box 517, E.E.

STAFF of the following grades, experienced in Physics or Electronics, Electrical or Mechanical Engineering design and development, are required by a Company opening up new laboratories to undertake advanced and important development work. Attractive salaries with an agreement covering three to five years will be offered to fully qualified Degree standard applicants. Assistance will be given to senior staff to enable them to purchase houses in the locality, which will be in the South of England. Applicants of British Nationality, must submit fullest details of education, qualifications, experience and age, stating married or single, and must indicate the position for which application is being made. It is required to form a team having the following composition: Chief Scientist, 1 appointment; Chief Mechanical Engineer, 1 appointment; Principal Scientific Officers, 3 appointments; Senior Mechanical Designers, 2 appointments; Senior Scientific Officers, 3 appointments; Experimental Officers, 5 appointments; Junior Engineers, 9 appointments; Chief Draughtsman, 1 appointment; Draughtsmen, 8 appointments. Applications should be addressed to A.D.L., Box 503, E.E.

UNIVERSITY GRADUATES are required now, and new openings will occur during the next six months, at the Research Laboratories of the General Electric Co. Ltd., East Lane, North Wembley, Middlesex. Physicists, Mechanical and Electrical Engineers and Physical Chemists are needed for research and development work. Details of vacancies will be sent to applicants who write to the Personnel Officer, stating age, academic qualifications and experience. Both Senior and Junior Graduates will be considered.

DEVELOPMENT ENGINEER required for development of electronic control and recording equipment. Must possess Honours Degree in Physics or Engineering and have practical experience. Salary according to qualifications. Brown Brothers and Co. Ltd., Rosebank Ironworks, Edinburgh, 7.

CHIEF INSPECTOR required for factory specialising telecommunications apparatus, and light engineering. Applicants to be conversant with most modern methods inspection, test and quality control. Accustomed to control of skilled, and training of unskilled male and female labour in inspection methods. Location, Dartford area. Write, in confidence, stating age, experience and qualifications and salary required, to Box 505, E.E.

COMMUNICATIONS ENGINEER required to take charge of expanding development laboratory. Applicants should preferably have technical qualifications to Ph.D. or D.Sc. standard, but applicants having B.Sc.(Hons.) in Physics or Electrical Engineering will be considered. Civilian or Forces experience in the design of radio communications equipment operating in H.F. and S.H.F. wave-bands is essential. A four-figure salary will be paid to a man over 35 having the required qualifications and personality. Kindly state full details to Box 511, E.E.

CLASSIFIED ANNOUNCEMENTS
continued on Page 4

Salute to Tufnol
DO YOU REMEMBER THIS?
"TUFNOL is resilient yet has good mechanical strength"
Tufnol trip bars raised the standard of operations on electrically operated drop stamp hammers by withstanding well over a million and a half knocks in eight months and still giving reliable service—previously, Lignum Vitae had lasted only 4 weeks.
Engineers in practically every industry have found the value of Tufnol in thousands of different ways.
Our Engineers will gladly help you
TUFNOL LTD · PERRY BARR · BIRMINGHAM 22B
Can TUFNOL improve your products or plant?
By Jove! TUFNOL stands up to it! Hammered 2,250,000 times before wearing out!

Our original advertisement brought to your notice this trip bar, a small but vital component on a drop stamp hammer. Formerly made of Lignum Vitae it had an average life of only four weeks. Then TUFNOL took over . . . and did remarkably well. **NOW,** after **FIFTY-TWO WEEKS** of continuous service, having taken **2,250,000** hard knocks, TUFNOL has at last worn out — *but it has saved at least thirteen replacements.*

Our Engineers will gladly help you

TUFNOL

An ELLISON Product

TUFNOL LTD · PERRY BARR · BIRMINGHAM 22B

2·2A

CLASSIFIED ANNOUNCEMENTS (Cont'd.)

WORKS ENGINEER required for factory engaged in light engineering industry. Applicants to have had wide experience in this class of work and capable of assisting in the designing and planning of plant required on modern mass-production lines; to have had experience in the control of labour in all departments connected with factory maintenance. Location, Dartford area. Write, in confidence, stating age, experience, qualifications and salary required, to Box 506, E.E.

MACHINE SHOP SUPERINTENDENT required, accustomed to the control of department comprising autos, capstans, presses, etc., fully conversant with the control of male and female labour and skilled personnel connected with these departments. Experience of welding and spraying an advantage. Location, Dartford area. Write, in confidence, stating age, experience, qualifications and salary required, to Box 507, E.E.

SENIOR FOREMAN required. Applicants must have had extensive experience in the training and control of labour producing commercial telecommunications equipment and similar apparatus for Government contracts and capable of laying out and setting up in the most modern fashion mass-production lines. Location, Dartford area. Write, in confidence, stating age, experience, qualifications and salary required, to Box 508, E.E.

IMPERIAL COLLEGE OF SCIENCE AND TECHNOLOGY (City and Guilds College). Lecturer in Electronics required in Electrical Engineering Department. Industrial or analogous experience, preferably in the research side, is essential. Commencing salary, £500 per annum, with Federated Superannuation. Applications with full details of qualifications to Head of Electrical Engineering Department, City and Guilds College, Exhibition Road, London, S.W.7, not later than 30th May, 1949.

THE UNITED BIRMINGHAM HOSPITALS. Assistant Laboratory Technician required in the Physics Workshop. The workshop is well equipped with lathe, precision lathe, milling machine, drilling machines, and is making apparatus for the Radiotherapy Department. Candidates must have had a sound mechanical training, and experience with plastics and assembling radio equipment will be useful. Commencing salary on the scale £300 by £15 to £390. Application, with two testimonials, should be made before 14th May, to the undersigned: G. Hurford, Secretary, Queen Elizabeth Hospital, Birmingham, 15.

ESTABLISHED MANUFACTURER in Wembley district requires for its Electro Acoustic Laboratory a Research Engineer with a sound knowledge Electronics and Electro-magnetism. Must have good training and experience and be capable of hard thinking and original inventive work. Laboratory is well equipped and has tool-room facilities. Most interesting work. Salary £500-£600 per annum. Write full details age, experience, etc. Box 514, E.E.

ASSISTANT to Service Manager of Radio Manufacturing Firm required in London, aged between 23 and 30. Technical radio experience in Forces or with radio manufacturers or large group retailers. Organisation and ability to deal with correspondence essential. Suitable to ex-Service, radio officer of Secondary School educational standard. Box 524, E.E.

TOOL DESIGN and Planning Engineer. Fully experienced in the most up-to-date methods of tool design and process layout. Capable of controlling new products from rough design stage through estimating, tooling, ratefixing, to production line. Similar experience in light engineering and radio industry essential for factory situated London area. Write, in confidence, giving full particulars of experience, qualifications and salary required, to Box 525, E.E.

RADAR SERVICE ENGINEERS required by London firm specialising in Marine Radar. Applicants should be ex-Army Staff Sergeants or Navy P.O. grades, with experience Service radar and passed long radar course. Good pay, prospects and travel. Write Box 527, E.E.

LARGE ELECTRICAL ENGINEERING firm in South London with International connexions, has vacancy for responsible Senior Design Engineer. Applicants must have first-class experience in developing 50 cycle and A.F. electronic equipment to production stage and a feeling for light mechanical designs. University Degree preferred. Very interesting permanent appointment. State age and salary required. Box E.E.80, L.P.E., 110, St. Martin's Lane, W.C.2.

TECHNICIAN, with experience in Electronics, Radio or Radar, is required to assist in the design, construction and maintenance of laboratory and process control electronic instruments. Applications, giving experience and salary required, to be marked "Personal" and addressed to the Chief Metallurgist, The Yorkshire Copper Works, Ltd., Pontefract Road, Leeds.

EXPERIENCED DESIGNER DRAUGHTSMAN age 28/40 for development and design of telegraph instruments and other light electro-mechanical mechanisms. Applicants must have practical outlook, sound workshop experience and be used to working on own initiative. Education to H.N.C. standard. Beckenham area. Salary up to £600 p.a. Apply giving full particulars to Box 528, E.E.

SITUATIONS WANTED

ADVERTISER able to construct all types valve-operated equipment from diagram only, carry out designer's ideas, make final diagrams, etc., desires post; willing, adaptable. Box 486, E.E.

ELECTRICAL ENGINEER, with 18 years' experience of electric furnaces and control equipment, desires post with first-class firm manufacturing or using such plant. Box 477, E.E.

CHIEF ELECTRONIC ENGINEER A.M.Brit.I.R.E., at present with well-known company engaged in industrial electronic equipment, design and manufacture, would like a change to a progressive firm; 24 years' experience in radio, communication engineering and electronics; good organising ability. Box 513, E.E.

EDUCATIONAL

IMPERIAL COLLEGE OF SCIENCE AND TECHNOLOGY, Electrical Engineering Department. Full-time post-graduate courses will be available for the sesson starting in October, 1949, in the subjects of Electronics and Electrical Communications, and Power System Analysis; these courses are conducted in close association with the research activity of the Department. Full particulars may be obtained from the Deputy Registrar, City and Guilds College, Exhibition Road, S.W.7.

A.M.I.E.E., City and Guilds, etc., on "NO PASS—NO FEE" terms. Over 95 per cent. successes. For full details of modern courses in all branches of Electrical Technology send for our 112-page handbook —FREE and post free. B.I.E.T. (Dept. 337B), 17, Stratford Place, London, W.1.

SERVICE

LOUDSPEAKER repairs, British, American, any make, moderate prices.—Sinclair Speakers, 12, Pembroke Street, London, N.1.

RADIO MANUFACTURERS can undertake development and assembly of radio or electronic equipment. Winding shop with vacuum impregnation plant. Ample space and labour available. Box 316, E.E.

COMMERCIAL SECURITY AGENCY. Status, commercial, inquiries. Kershaw, 24 Museum Street, London, W.C.1.

MISCELLANEOUS

WE WILL BUY at your price used radios, amplifiers, converters, test meters, motors, pick-ups. speakers, etc., radio and electrical accessories. Write, phone or call, University Radio Ltd., 22, Lisle Street London, W.C.2. GERrard 4447.

FULLY EQUIPPED Model Shop available to handle all classes of electronic instrument work. Prompt completion of Production Test equipment, etc. Circuit diagram and brief specification only required. Quotation and delivery date within three days. Quantities 1-25 instruments. Development work also undertaken for electronic/mechanical equipment. High-grade workmanship and accurate performance is guaranteed. Spencer-West (S. S. West), Quay Works, Gt. Yarmouth.

PATENTS

THE PROPRIETOR of British Patent No. 557,675, relating to "Improved Device for Measuring Force Electrically," is desirous of entering into arrangements by way of licence or otherwise on reasonable terms for the purpose of exploiting the same and ensuring its full development and practical working in this country. Interested parties who desire a copy of the Patent Specification and further particulars should apply to S. E. Matthews of 14-18 Holborn, London, E.C.1.

FOR SALE

WEBB'S 1948 Radio Map of World, new multi-colour printing with up-to-date call signs and fresh information; on heavy art paper, 4s. 6d., post 6d. On linen on rollers, 11s. 6d. post 9d.

IN STOCK. Rectifiers, Accumulator Chargers, Rotary Converters, P.A. Amplifiers, Mikes, Mains Transformers, Speakers of most types, Test Meters, etc. Special Transformers quoted for.—University Radio, Ltd., 22, Lisle Street, London, W.C.2. GERrard 4447.

COPPER WIRES: enamelled, tinned, Litz, cotton, silk covered. All gauges. B.A. screws, nuts, washers, soldering tags, eyelets. Ebonite and laminated Bakelite panels, tubes. Paxolin coil formers. Tufnol rod. Permanent detectors, etc. List S.A.E. Trade supplied. Post Radio Supplies, 33, Bourne Gardens, London, E.4.

8-WAY HIGH VOLTAGE "Jones" type Plugs and Sockets, with crackle covers, 1s. 6d. pair complete, 12s. dozen pairs, £3 10s. per 100 pairs, carriage paid, Jack Porter Ltd., College Street, Worcester.

A QUANTITY of Type 100L Variacs 2 KVA. Thoroughly inspected and tested. 8 gns. each, carriage extra. Box No. 452, E.E.

CHASSIS, panels, racks and metal cabinets. Stock sizes or made to specification in steel or aluminium. Wrinkle finishes available. Reosound Engineering and Electrical Company, Coleshill Road, Sutton Coldfield.

FERRANTI 7.5 KVA VOLTAGE REGULATORS, moving coil. Input, 200-250V+8% to −12%, 45 to 66 c/s. Output, 200-250V±½%, frequency compensated; new and unused, with handbook. Offered at a fraction of cost price to clear. Box 474, E.E.

CAPACITORS—paper dielectric in rectangular metal cans. 2μF 500 volts D.C. and 1μF 1,000 volts D.C. In unused condition. Approximately 1,400 for disposal. Radio frequency cable by B.I. Cables, 7/.022 and 3/.018 low capacity twin semi-air-spaced dielectric cable with star-shaped core. Approximately 4,000 yards for disposal; also coaxial solid dielectric cable in sizes 1/.128, 1/.029, 7/.032, 1/.056. John Cashmore Ltd., Great Bridge, Tipton, Staffs.

I.F.Ts. 465, 6s. pr.; 3 W.B. Coil Pack Kit, L.M.S. or M.S.S., 9s. 6d.; 8μF 450V, 2s.; 100 pF+100 pF, 2d.; Eyelets, etc., 1s. gross; 0.2 amp 717 ohms tapped Droppers, 1s.; Mains Transformers, 16s. 6d.; 50 pF Trimmers, 4d.; Knobs, 4d. Send for cheapest list in England. Sussex Electronics Ltd. (T), Riley Road, Brighton. Tel. 4446.

ELECTRON MULTIPLIER PHOTOCELLS, gas-filled triodes and tetrodes, cold cathode tubes, position indicating mechanism, etc., available from stock. Send stamp for new lists. A. McMillan, 5 Oakfield Road, Bristol, 8.

COMPLETE TELEVISION KIT, Superhet, 9.0 in' tube, Gardner Transformers, £22. Connoisseur P.U.. G.E.C. Motor, £6. Box 516, E.E.

"ELECTRONIC ENGINEERING," 1941-1949, £7: offer, Terman £1; others cheap. Wrighton, 179, Wickham Street, Welling, Kent.

EX-ADMIRALTY, 0.75 K.V.A. Transformers, 230/230 with totally screened secondaries. Weight, 75 lb. 4 gns. each. Box 504, E.E.

15-INCH TELEVISION Tube for sale, new, unused, £15. White mask, line output transformer, focus and deflector coils (all new E.M.I.), also available. Box 518, E.E.

MAGSLIPS and Selsyns, including Transmitters, Receivers, Resolvers, etc. Selsyn with torque up to 45 lb. per inch. Send for list, Hopton Radio, 1 Hopton Parade, Streatham High Road, London, S.W.16. STReatham 6165.

WANTED

CARRIER TELEPHONE and Telegraph Equipment of all types in any condition wanted; also Teleprinter or Teletypewriter apparatus. Harris and Gillow, 93 Wardour Street, W.1.

VACUUM GAUGE or Gauges, reading 10 to 10^{-4} mm. Hg, also Pyrex domed chamber suitable blooming. No fancy prices. Box 502, E.E.

INDEX TO ADVERTISERS
SEE PAGE 36

THE "BELLING-LEE" PAGE

Providing technical information, service and advice in relation to our products and the suppression of electrical interference

"Costly aerials unnecessary in many areas"

This heading appeared recently in certain Midland newspapers and we heartily agree. There is no doubt that in the London area many "H" type aerials*1 were erected because of their snob appeal, the resulting signal being so strong that attenuators had to be fitted to reduce signal input.

So very much depends upon the site. We have always said that the "H" type should be used more often to reduce the pick-up of interference rather than to boost the signal. We do most sincerely ask readers to bear in mind that the "Veerod"*2 indoor or outdoor (as illustrated) or a "Doorod"*3 used as a "Veerod," are both directional, with sharp minima at right angles to their axes, whereas a single dipole is without directional properties.



Television Aerial Performance

After an examination of television receiver sensitivities for peak vision white it would appear that the majority lie between 100 and 200 microvolts.

Taking 150 microvolts as a representative figure and using the latest B.B.C. field strength contour map, it is now possible to give for various "Belling-Lee" aerials, the range at which good reception should be almost certain. Since the B.B.C. field strengths on a given contour can vary ± 10 db the most pessimistic field strengths are firstly used for giving the more certain range.

In the second column are given the distances when the higher field strength is encountered.

These tables will explain why unexpected ranges are often encountered. All these figures are for two-storeyed houses. Greater ranges are to be expected on taller buildings.

Corroded Aerials

We know only too well that since the war we have not been able to maintain the same high standard of finish that we could demand in pre-war days. Many hundreds of our pre-war "Skyrod"*4 and television aerials are still giving good service; they had double plating, both zinc and cadmium, followed by a thick coating of pigmented chlorinated rubber. Even if we could still obtain adequate supplies of such materials the public would never pay their price today.

Even when a specification of raw material is accepted by a supplier it is rarely kept, and we find ourselves compelled to accept something inferior or do without.

Immediately after the war we used the finish called for by the Services for the aerials we made for them, i.e., zinc plate and chromate passivate. We soon found this otherwise good finish would not stand up to prolonged exposure to sulphur laden atmospheres from chimneys. This was followed by bonderising plus aluminium paint. If the paint had been to specification, or of pre-war quality this would have been a considerable advance, but it was not.

We have consistently advertised in this and other publications, that aerials should be painted again at the time of erection, and this is mentioned in instructions.

The public just would not pay the price of galvanised elements. Galvanising in itself is not expensive, but the removal of tears, lumps, etc., to ensure close fits, would put up the cost terrifically.

Steel or Light Alloy

Now, by "controls," we have been forced over to high tensile light alloy. This gets over the trouble of finish, but new troubles arise. To ensure the same margin of safety, we have to use heavier gauges of material than is usual, this brings "humming in the wind" as one of the teething troubles but we have cured that one.

Very often we know a change unavoidably to be a retrograde step, but as it looks different everybody thinks it must be better.

Generally, when a change is made to one of our aerials it is not just to create something new. It is often because we can no longer maintain by the old method, the quality we like to have associated with our products and we are often disappointed with the change. "Belling-Lee" television aerials are stronger than any we have tried, and while we know their elements are designed to withstand gusts of 100 m.p.h. we don't feel happy about their retaining the straightness usually associated with aerials of our manufacture. If we could obtain supplies of steel, and give them our pre-war protection, we would not hesitate to change back.

In very bad cases, where steel aerials have seriously corroded within a month or two of erection, we replace the faulty parts free of charge.

Aerial	Maximum Certain Range in Miles	Occasional Range in Miles	Known Extreme Range in Miles
Standard "H" on chimney	35	60—70	Over 100*
Dipole on chimney ...	18	50	No data
Inverted "V" on chimney	14	35	No data
Inverted "V" or "Doorod" in attic	10	30	No data
On second floor	6	16	30

* Johannesburg, South Africa.

The figures in this table are scientifically compiled and are therefore very conservative and subject to local influences e.g., anything might happen if a gas-holder were close to and between an aerial and transmitter.

Readers of this page, visiting the B.I.F., Castle Bromwich, are invited to call on us, Stand C712, in the electrical section.

*1 "Viewrod" (Regd. trade mark) television aerials. L502/L London. L634 Midland. £6 6s.

*2 "Veerod" (Registraton applied for). Attic aerial L605 London. L646 Midland. £2 12s. 6d.

The illustration shows the "Belling-Lee" "Veerod" chimney mounting inverted "V" aerial, List No. L606 (London) L635 (Midland). £4 10s.

*3 "Doorod" indoor television aerial L645 London. L678 Midland. £1 10s.

*4 "Skyrod" (Regd. trade mark) anti-interference vertical aerials, now known as L638/K chimney mounting with "Eliminoise" (Regd. trade mark) transformers and feeder. £10.

BELLING & LEE LTD
CAMBRIDGE ARTERIAL ROAD, ENFIELD, MIDDX
ENGLAND

SEE OUR EXHIBIT
STAND Nos. C225/102
B.I.F BIRMINGHAM

Standard MAGNETIC MATERIALS

PERMALLOY 'C'
for highest initial permeability. Useful for wide frequency band transformers, current transformers, chokes, relays and magnetic shielding.

PERMALLOY 'B'
for higher flux densities than Permalloy 'C' and high incremental permeability. Suitable for low power and intervalve transformers.

PERMALLOY 'D'
for very high resistivity without undue lowering of maximum flux density or of the Curie point. Small variation of permeability with frequency. Ideal for H.F. applications.

V—PERMENDUR
for high permeability with unusually high flux density. Specially applied to high quality diaphragms and pole pieces

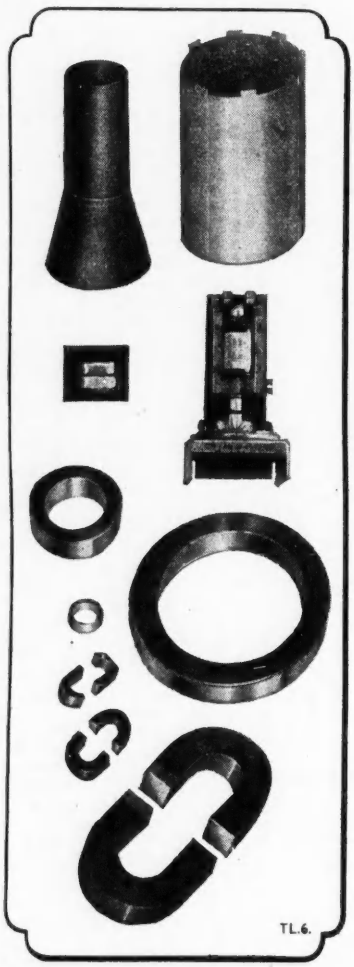

Standard Magnetic Materials, which have been steadily improved and extended in range over many years, are produced by a Company which has the unique advantage of being also a large scale user of these materials.

Standard Telephones and Cables Limited

(Registered Office: Connaught House, Aldwych, London, W.C.2)
(Telephone Line Division)
NORTH WOOLWICH, LONDON, E.16. Telephone: Albert Dock 1401

Laboratory Precision in Production Testing

A direct-reading capacitance bridge that will measure capacitance and power factor with laboratory precision but is built to withstand the heavy usage encountered in production testing.
The quartz insulated variable air capacitance standard guarantees the highest accuracy and stability under all working conditions.

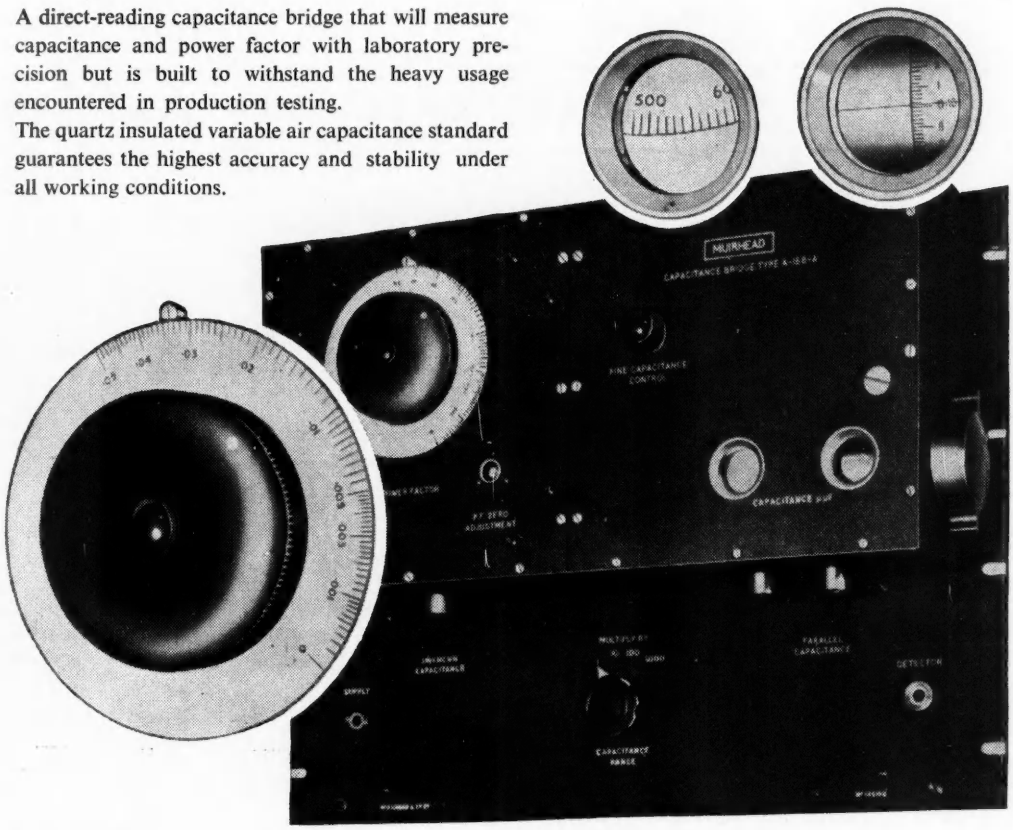

SPECIFICATION:
Modified Schering Bridge, double screened and direct reading in capacitance at any frequency between 50c/s and 10 kc/s. Direct reading in power factor at 1 Kc/s; a simple correction is necessary at other frequencies.

RANGES:
Capacitance: 100 $\mu\mu$F to 1 μF on 4 ranges.
Power Factor: 0 to 0.05 at 1 kc/s.

CAPACITANCE STANDARD:
High quality quartz insulated variable air condenser with precision worm drive gives discrimination to 0.2 $\mu\mu$F. Directly calibrated in $\mu\mu$F from 100 to 1000; measurements outside the normal ranges may be made by the substitution method.

ACCURACY:
Capacitance; ± 0.1% of full scale reading on all ranges.
Power Factor:
by direct reading: ± 0.0003 ± 3% of scale reading.
by substitution: ±0.00005 ± 3% of scale reading.

May we send you Publication C-104 giving full details of this and other A.C Bridges?

MUIRHEAD

Muirhead & Co. Limited, Elmers End, Beckenham, Kent. Tel: Beckenham 0041-2

FOR OVER 60 YEARS DESIGNERS AND MAKERS OF PRECISION INSTRUMENTS

CRC80a

VALVES FOR TELEVISION RECEIVERS

6F14 TELEVISION SCREENED PENTODE

The Mazda 6F14 is a high slope miniature pentode particularly suitable for use as a Video Amplifier in Television Receivers.

BASE B8A

Viewed from free end of pins.

CONNEXIONS

Pin 1 ..	Heater	h
Pin 2 ..	Anode	a
Pin 3 ..	Internal Shield*	s
Pin 4 ..	Suppressor Grid ..	g_3
Pin 5 ..	Screen Grid	g_2
Pin 6 ..	Control Grid	g_1
Pin 7 ..	Cathode	k
Pin 8 ..	Heater	h

* This valve is not fitted with an internal cylindrical shield around the electrode structure.

TENTATIVE

RATING

Heater Voltage (volts)	V_h		6.3
Heater Current (amps)	I_h		0.35
Maximum Anode Voltage (volts) ...	V_a(max)		250
Maximum Screen Voltage (volts) ..	V_{g2}(max)		250
Mutual Conductance (mA/V)	g_m	*	10.6
Anode Impedance (megohms)	r_a	*	0.125
Inner μ	$\mu_{g,1g2}$	*	33
Maximum Anode Dissipation (watts) ...	W_a(max)		4.0
Maximum Screen Dissipation (watts) ...	w_{g2}(max)		1.0
Maximum Potential Heater/Cathode (volts D.C.)	V_{h-k}(max)		150

* Taken at $V_a = V_{g2} = 140v$; $V_{g1} = -1.25v$.

INTER-ELECTRODE CAPACITANCES

		§	†
Anode/Earth (μμF)	C_{out}	3.8	5.3
Anode/Control Grid (μμF) ...	C_{a-g1}	.02	.021
Control Grid/Earth (μμF) ...	C_{in}	9.3	10.8

§Inter-electrode Capacitances with holder capacitance balanced out.

†Total capacitance including a Benjamin B8A moulded holder at a frequency of 1 Mc/s.

List Price 15/6d.

Further details will be supplied on application to the Radio Division.

EDISWAN
MAZDA
RADIO VALVES AND TELEVISION TUBES

THE EDISON SWAN ELECTRIC CO. LTD., 155 CHARING CROSS ROAD, LONDON, W.C.2

V122

EDISWAN
LOW FREQUENCY OSCILLATOR
TYPE R 666

★ VERY LOW FREQUENCIES
★ HIGH STABILITY
★ WIDE RANGE
★ PURE WAVEFORM
★ PUSH-PULL OUTPUT
★ FREQUENCY INCREMENT SWITCH
★ CONSTANT OUTPUT VOLTAGE
★ OUTPUT ATTENUATOR
★ COMPACT AND PORTABLE
★ STANDARD RACK MOUNTING

THIS is a much-needed oscillator designed specifically for testing, calibration and set-up of biological amplifiers and recorders, strain and vibration recorders, and low frequency wave analysers.

It has a resistance/capacity circuit of special design with automatic amplitude control to ensure constant output and good waveform at frequencies from 1.1 to 5,000 c.p.s. The circuit is remarkably free from trouble associated with change of valve characteristics, ensuring that accuracy is dependent only upon the frequency selective network components.

An incremental frequency switch is included specifically for the measurement of 'Q' in frequency selective circuits of filters or wave analysers.

Further details will be given on request.

EDISWAN

THE EDISON SWAN ELECTRIC CO. LTD., 155 CHARING CROSS ROAD, LONDON, W.C.2
RA.116

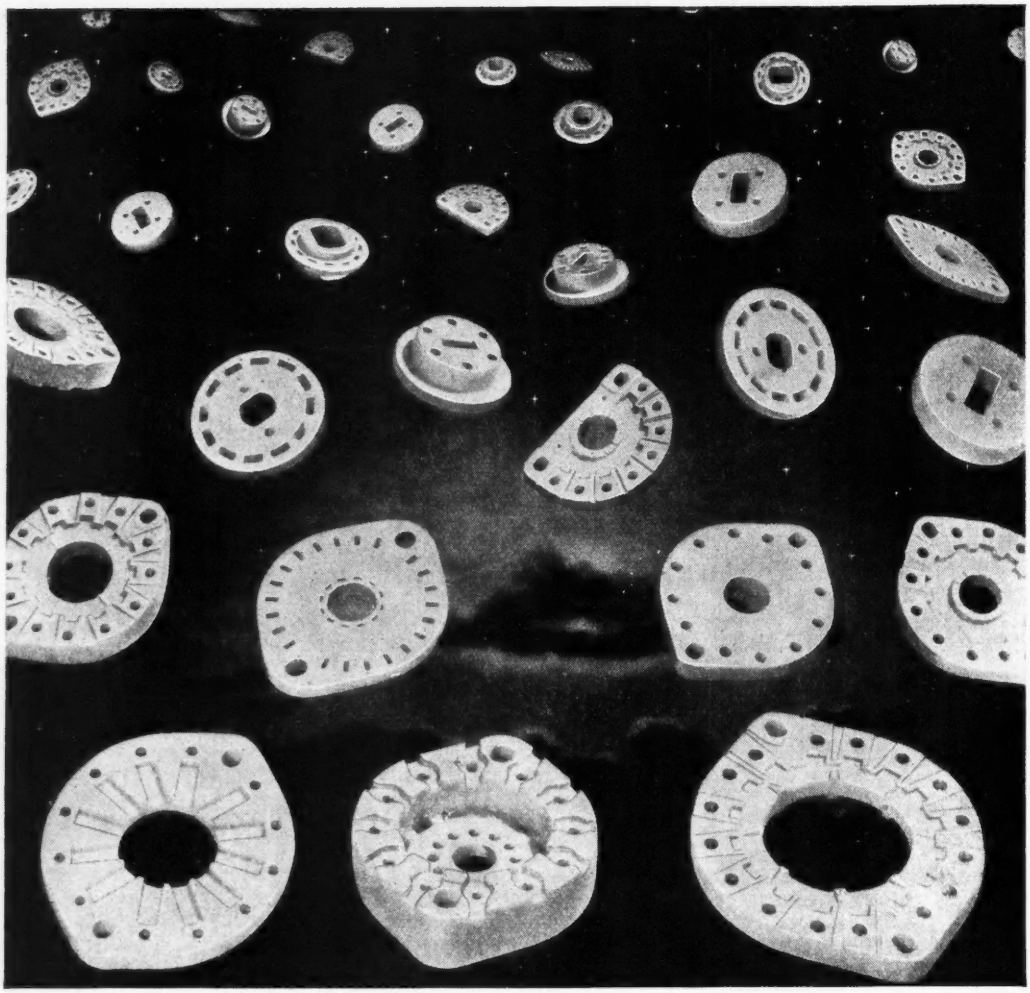

CERAMICS

FOR SWITCHES
and all radio components
FREQUENTITE-FARADEX-TEMPRADEX

STEATITE & PORCELAIN PRODUCTS LTD.

Stourport on Severn, Worcester Telephone: Stourport 111 Telegrams: Steatain, Stourport

S.P. 54

NINE EXAMPLES

from the

"FLEXILANT"

(RUBBER BONDED TO METAL)

RANGE *of* MOUNTINGS

•

OBTAINABLE FROM STOCK

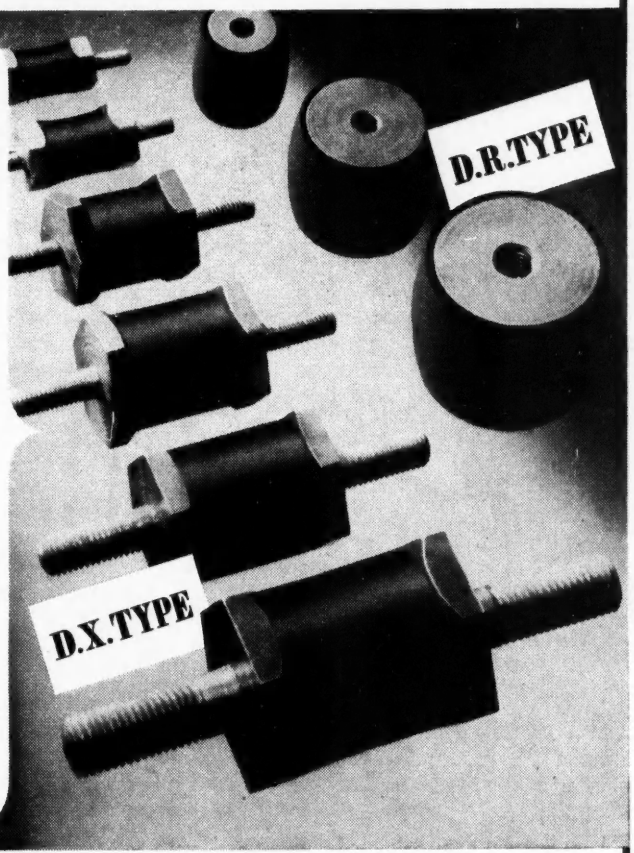

OUR TECHNICAL STAFF investigates all mounting problems May it investigate yours?

FLEXILANT

RUBBER BONDERS LIMITED

ENGINEERS IN RUBBER BONDED TO METAL

FLEXILANT WORKS

DUNSTABLE · BEDS.

TELEPHONE DUNSTABLE 8051.

R.B.67

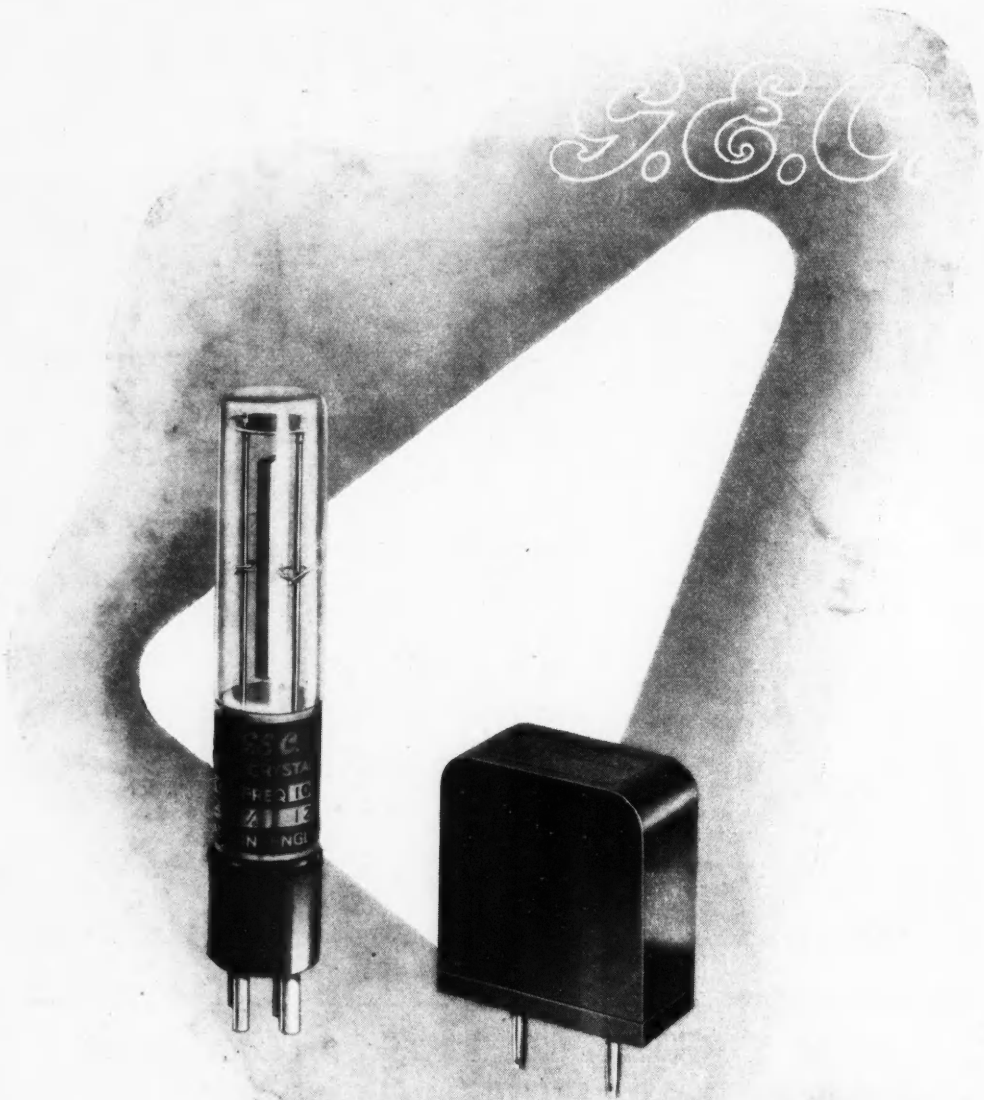

QUARTZ CRYSTAL UNITS

Available in a variety of types for frequencies from 4 Kc/s. to 15 Mc/s.
Send your enquiries to :—

SALFORD ELECTRICAL INSTRUMENTS LTD

PEEL WORKS, SALFORD 3, LANCS., ENGLAND

Proprietors : THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

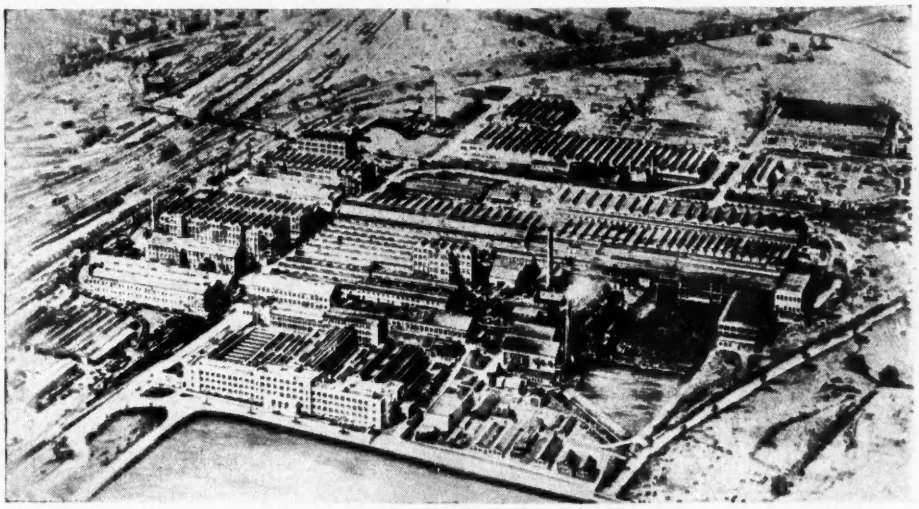

An aerial view of the main works at Rugby

B
T-H

The British Thomson-Houston Company Limited — known to engineers all over the world as BTH — was founded over half a century ago. It is one of the leading British firms in the electrical industry, pre-eminent in research, design and manufacture.

Factories at :

BIRMINGHAM: CHESTERFIELD: COLNE: COVENTRY: LEICESTER: LUTTERWORTH: NELSON: NEWCASTLE-UNDER-LYME: RUGBY: PETERBOROUGH: WILLESDEN.

STAND NO. C 511/410

BIF 1949

BIRMINGHAM SECTION

MAY 2–13

BRITISH THOMSON-HOUSTON

THE BRITISH THOMSON-HOUSTON CO. LTD., RUGBY, ENGLAND

A 3894

Do your circuits operate in high temperatures? Do you face continuous renewal of cables and wires that have had the life baked out of them?

For "hot-spots" like these, B.I.C.C. can now provide Silicone Rubber Insulated Cables and Flexibles. Silicone Rubber is designed to provide reliable, stable insulation in unusually high temperatures. It remains flexible and does not bake, crack or flow. Silicone rubber insulating tubing can also be offered

Investigate these new cables and see if they solve your problems. Enquiries for special applications are sought and welcomed. When writing, please give complete data on installation, condition of service, voltage and current loading. Your nearest B.I.C.C. office will be pleased to deal with your enquiry.

Application

Boiler gauge light connections. Thermo-couple leads. Connections for rheostats, furnaces, flue motors, electric ranges, stoves, electronic equipment and commercial radio apparatus. Turbo-jet engine leads. Film projector connections. Insulating sleeves for radio.

B.I. Callender's

SILICONE RUBBER INSULATED CABLES

BRITISH INSULATED CALLENDER'S CABLES LIMITED
NORFOLK HOUSE, NORFOLK STREET, LONDON, W.C.2

Yes Sir-

that's my baby!

Type B.T.

If you have only limited space and require only simple switching, then the Type B.T. is the switch you need. It is a midget, and has been specially designed for small spaces. Here are some new features which we have recently included—

- **The contact blades are fixed in a new way. This makes them completely rigid all the time.**
- **The drive spindle is positioned definitely in the wafer. This provides double bearing.**
- **Steady contact resistance.**
- **Improved insulation between contacts.**
- **Positive contact.**
- **Self-cleaning action.**

It ought to be good? It *is* good—sensible and efficient. It will last you a long time.

CRG 45

WALTER SWITCHES—MADE FOR LIFE

Walter Instruments

LIMITED

GARTH ROAD, LOWER MORDEN, SURREY TELEPHONE: DERWENT 4421-2-3

60 'CINTEL' Photo-Electric Cells

The most comprehensive range of Cells in the World...

Available with three types of cathode surfaces :—

TYPE A—Antimony-Caesium. (British Patent No. 522.752 1938). Sensitive to blue light and daylight.

TYPE B—Bismuth etc.—Caesium. Sensitivity similar to human eye.

TYPE S—Silver-Oxygen-Caesium. Red-infra-red sensitive.

Cells for use in the ultra violet region of the spectrum · Cells of high insulation, linearity and stability for accurate photometric work · American type equivalents · Push-Pull types for double sound tracks · Special cells for dye image sound tracks, multipliers, etc. *Please write for catalogue.*

Sixty different types of Photo-Electric Cells



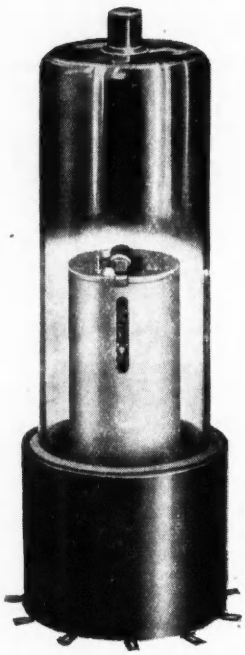

—from miniature to multiplier—

CINTEL

Registered Trade Mark

FOREMOST IN THE MANUFACTURE OF

- COUNTERS & CHRONOMETERS
- METAL DETECTORS
- OSCILLOSCOPES
- PHOTO-ELECTRIC CELLS
- CATHODE RAY TUBES
- GEIGER-MULLER TUBES
- ELECTRONIC INSTRUMENTS

CINEMA-TELEVISION LIMITED

WORSLEY BRIDGE ROAD, LONDON, S.E.26

Telephone: HITher Green 4600

Important ANNOUNCEMENT

to users of the AVO VALVE TESTER

In response to popular request, we are now pleased to announce the availability of the following accessories, which provide an inexpensive means of bringing the "Avo" Valve Tester completely up-to-date. Possession of these accessories will, furthermore, render it a simple matter to maintain the "Avo" Valve Tester in a condition capable of testing any new types of valves that may be produced in the future.

ACCESSORIES for the 'AVO' VALVE TESTER

FILAMENT VOLTAGE EXTENSION UNIT

For providing filament voltages of 1.4 to 117 volts for testing valves recently introduced into general use and which are not covered by the original "Avo" Valve Tester.

This unit is plugged in between the Meter panel and the S.S. panel, where it may be left permanently in position regardless of whether the original or the additional heater voltages are being used.

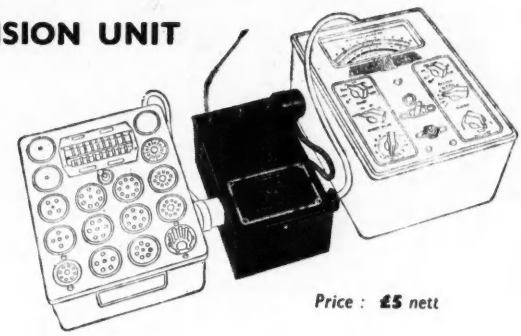

Price : ***£5*** *nett*

VALVE BASE ADAPTORS



These Adaptors have been specially designed for plugging into the international octal socket of any "Avo" Valve Tester Panel which is fitted with a rotary selector switch. The following types, covering recently introduced valve bases not provided for on the existing Valve Panel, are now available :—

Type No. 1	B7G and B8A
,, ,, **2**	B9G (EF50 etc.)
,, ,, **3**	B8B (American Loctal)
,, ,, **4**	Hivac Midget 4- and 5-pin and Midget Diode
,, ,, **5**	Blank

Other types will be made available as required, and Adaptors can also be supplied for any special valve base.

Price : **12/6** *each, nett*

Sole Proprietors and Manufacturers :

AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT Co., Ltd.,
Winder House, Douglas Street, London, S.W.1

Telephone : VICtoria 3404/9

VTE 1.

THIS COLD CATHODE THYRATRON..

High cathode current
Stability
Long life

This new Mullard 1267 will be welcomed by all users of cold cathode thyratrons. A replacement for, and an improvement upon the OA4G, it has the following outstanding advantages :—

(1) *High continuous and instantaneous cathode current.*

(2) *Consistent striking characteristics.*

(3) *Higher stability and freedom from photoelectric and temperature effects.*

(4) *Reliability and long life resulting from improved cathode activation.*

These features make the 1267 ideal for a great number of industrial electronic applications, the more important of which include :—

- *Welding and industrial engineering timers.*
- *Sequential process timers.*
- *Alarm, fault and protective systems.*
- *Remote-controlled power switching.*

PRINCIPAL CHARACTERISTICS	
*Max. Operating Anode Voltage	225V peak
Trigger Voltage for firing (Pos.)	70V. min. to 90V. max.
Trigger Current at Striking Point (V_a=140)	100μA max.
Valve Voltage Drop	70V. approx.
Max. Continuous Cathode Current ...	25mA
Max. Peak Cathode Current	100mA

*Above this voltage the valve may break down at Vg=0.

Mullard

thermionic valves & electron tubes

Industrial Power Valves · Thyratrons · Industrial Rectifiers · Photocells · Flash Tubes · Accelerometers
Cathode Ray Tubes · Stabilisers and Reference Level Tubes · Cold Cathode Tubes · Electrometers, etc.

MULLARD ELECTRONIC PRODUCTS LTD., CENTURY HOUSE, SHAFTESBURY AVENUE, W.C.2

MVT45



Electronic Engineering

EDITORIAL, ADVERTISING AND PUBLISHING OFFICES, 28, ESSEX STREET, STRAND, W.C.2.

TELEPHONE: CENTRAL 6565 (10 LINES) *EDITOR:* H. G. FOSTER, M.Sc., M.I.E.E. *TELEGRAMS:* LECTRONING, ESTRAND, LONDON

Monthly (published last Friday of preceding month) 2/- net. Subscription Rate: Post Paid 12 months 26/-.

Vol. 21. No. 255 May, 1949

CONTENTS

Voltage Stabilisers—Part I ... By F. A. Benson, M.Eng., A.M.I.E.E.	155	Cathode Ray Tube Applications in Photography and Optics—Part II ... By C. Berkley and R. Feldt	169
Combined Current and Voltage Feedback ... By K. R. Sturley, Ph.D., A.M.I.E.E.	159	A Chart for Hyperbolic Functions ... By H. M. Clarke, M.Sc., A.M.I.E.E.	172
Ultrasonics in Agriculture ... By M. Lorant	161	Portable Counter for Geological Research ... By O. J. Russell, B.Sc., A.Inst.P.	173
Britain's First Commercial Ultrasonic Generator	161	5 to 8 KV Radio Frequency E.H.T. Unit ...	174
The Neutralisation of Input Capacitance on L.F. Amplifiers ... By V. H. Attree, B.Sc. (Eng.)	162	The Optimum Performance of a Wave Analyser By N. F. Barber, M.Sc.	175
Frequency Allocation for Five Channels and Recommendations for Receivers for Asymmetric Sideband Reception ...	163	An Electronic Stopclock ... By K. J. Brimley, B.Sc.	180
Ultrasonic "Stethoscope" for Testing Generator Rotors ... By M. Lorant	164	Notes from the Industry ...	184
Televising the 1949 Oxford and Cambridge Boat Race By T. C. MacNamara and P. A. T. Bevan	165	Correspondence ...	185
		Electronic Equipment ...	186
		Book Reviews ...	188
		May Meetings ...	191
		Abstracts of Electronic Literature ...	192

Exhibitions

OFFICIAL details have now been released of the Radio Industry's contribution to the British Industries Fair to be held in London and Birmingham from May 2 to May 13, and television will undoubtedly be the main theme, both at the London and Birmingham sections.

At Birmingham an Image Orthicon Television Camera will be televising from inside the Fair and a similar camera just outside the main scenes including the arrival and departure of aircraft from the adjacent airport. Visitors to the Fair will thus have the opportunity of seeing televised scenes from the crowds of which they themselves are a part. These demonstrations will show that British television has reached a new stage far in advance of anything hitherto achieved.

The equipment providing these facilities will be operating on the 625 line systems and will thus form the first public demonstration of television operating on the standards recently recommended for adoption by countries not already committed to the British or American standards.

Similar apparatus was used for televising the Boat Race, a technical description of which appears in this issue.

Of special interest, too, will be the actual vision transmitter destined to be the B.B.C's third television transmitter and which will incorporate many new and unique features. This transmitter will operate in the 42-46 Mc/s. band with positive modulation at a power of 35 KW as compared with the 17 KW of the existing Alexandra Palace transmitter.

In the Radar Section will be a new cloud and collision warning equipment designed to give warning to aircraft pilots of certain types of cloud formations associated with storm areas at a distance of 40 miles.

In the section devoted to Electronic apparatus there is much that is both new and novel in the ever widening application of electronics to measurement, control and selection.

It is axiomatic that with this wider use, important conditions must be fulfilled in the design of the apparatus. It must be reliable in operation, give indications which are capable of easy interpretation and possess the ability to withstand abuse by the non-technical user. But British manufacturers appear to be fully aware of these problems and have produced new and valuable tools which are more than "gadgets."

For example, farmers will now have a portable pH meter which, by inserting an electrode into the soil, will give a direct reading of soil acidity or alkalinity. A demonstration can also be seen of an electronic method of treatment and drying grass to ensure full nutritional value for consumption by livestock.

The Physical Society's 33rd Exhibition of Scientific Instruments and Apparatus was held last month at the Imperial College, South Kensington. Lack of space, however, prevents a detailed review of new electronic apparatus, some of which was displayed at the earlier R.C.M.F. Exhibition and subsequently reviewed in these pages in the April issue.

NEW BRITISH ULTRASONIC GENERATOR

(See page 161)

Left : **Ultrasonic fountain and mist**

Right : **Defraction patterns produced on surface of a liquid**

The new Mullard Ultrasonic Generator with covers removed with transducer head in foreground

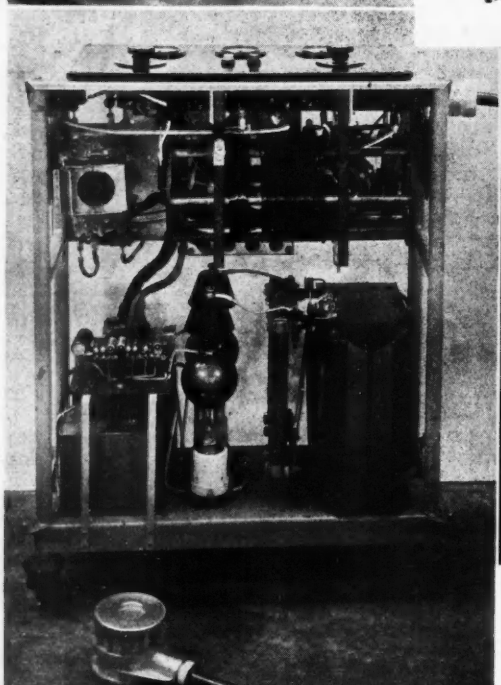

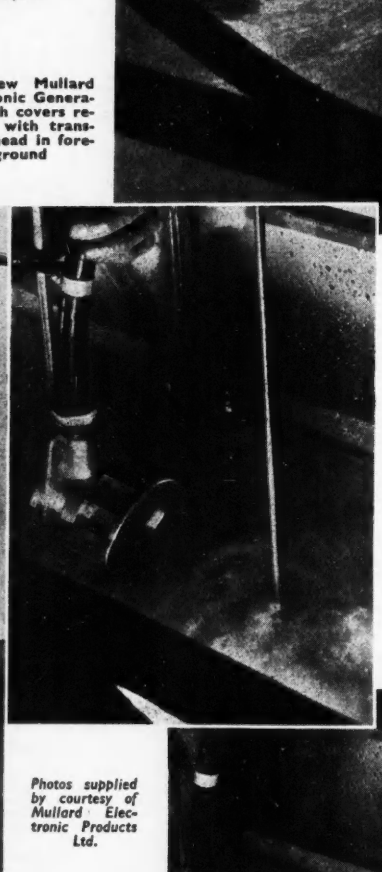

Centre : **Defraction of ultrasonic beam by a vertical rod showing production of separate fountains at a deflector plate**

Bottom left : **Agitation of water and production of mist over a deflector plate immersed in path of beam**

Bottom right : **Treatment of a sample in a test tube by immersion at the focus of a parabolic reflector**

Photos supplied by courtesy of Mullard Electronic Products Ltd.

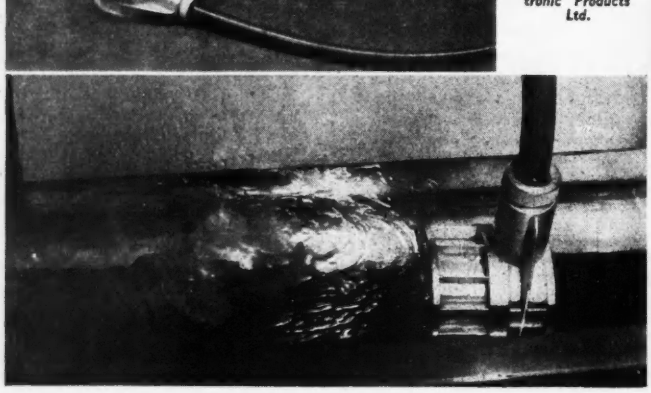

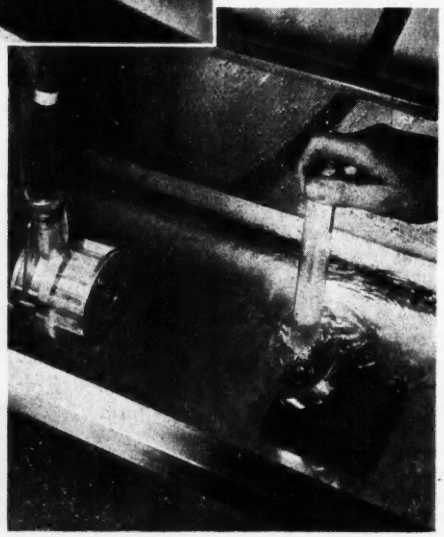

VOLTAGE STABILISERS Part I

By F. A. BENSON, M.Eng., A.M.I.E.E.*

IT is generally desirable to operate equipment from power supplies fed directly by the mains rather than to employ batteries. The necessary power supplies are usually obtained from the mains through rectifier units, each of which normally incorporates a transformer, a rectifier, and a smoothing circuit. Large changes in the output voltage of such a rectifier unit are produced by load current variations. Further, the mains voltage and its frequency may vary. The effect of variations in frequency on the output voltage of the rectifier unit, however, is usually fairly small. Many circuits only operate satisfactorily from a power supply the voltage of which is independent of both fluctuations in the mains voltage and variations in load current. To meet these requirements, voltage stabilisers are employed. They have been developed for stabilising either A.C. or D.C. power supplies and some arrangements can deal with either. Voltage stabilisers, in general, also have the further beneficial effect of reducing any ripple voltages present in the output of a power supply to which they are connected. Typical cases where the above requirements have to be satisfied are found in work involving the use of high-frequency oscillators (klystrons), photocells or electronic measuring instruments. In the case of a klystron, for example, the output and the frequency depend on the magnitudes of the voltages applied to the various electrodes and ripple voltages produce frequency modulation of the output. Again, certain photocell equipments require a light source whose candle-power remains sensibly constant.

This series of articles reviews the various methods of stabilising the voltages of both A.C and D.C. power supplies. Circuits which employ magnetically-saturated elements are considered first. Then follow descriptions of circuits employing gaseous discharge tubes. The characteristics of the available tubes are quoted and the limitations of the tubes are discussed. Thermionic-valve circuits are then dealt with. After a brief account of the available methods of using thermionic valves as stabilisers, several practical circuits which have been found extremely useful are described in detail. The performances to be expected of these circuits are given. Although the articles are essentially non-mathematical, the theory of a number of thermionic-valve circuits has been included in an appendix for the benefit of readers who wish to go into the subject more fully. Finally, several miscellaneous circuits are briefly described.

Much has been published on the subject of voltage stabilisers. Most of the articles describe particular circuits and give details of their performances. As it is impossible to include details of all the circuits a fairly extensive bibliography is included.

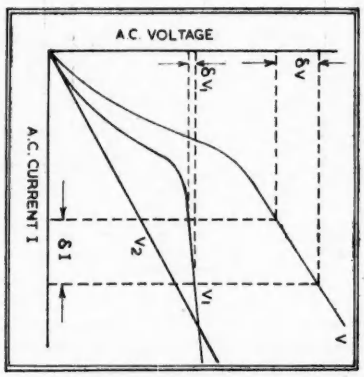

Fig. 1. Current and voltage with saturated and unsaturated reactors connected in series

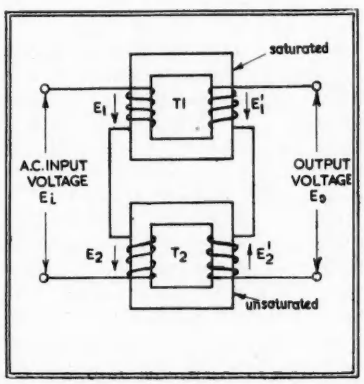

Fig. 2. Transformer-type stabiliser

Stabilisers Employing Magnetic Saturation

Stabilisers employing magnetic saturation deal with A.C. power supplies and many circuit arrangements have been devised. A number of different designs are considered in detail below. Each has an element which is magnetically saturated so that the output voltage does not vary in accordance with input voltage changes but tends to remain constant.

One of the simplest circuits consists of saturated reactor connected in series with an unsaturated reactor.[1,2] The voltages across the saturated and unsaturated reactors, V_1 and V_2, respectively, vary with the current I flowing in the circuit in the manner shown in Fig. 1. At any particular value of current the input voltage V is the sum of V_1 and V_2. It will be seen that a change δV in the voltage V produces only a change of δV_1 in the voltage V_1. Thus, by correct choice of components, the percentage change of V_1 may be made much less than the percentage change of V. The arrangement can, therefore, be used as a voltage stabiliser by connecting

* Electrical Engineering Department, University Liverpool.

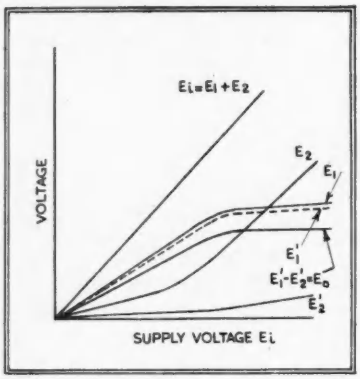

Fig. 3. Variations of E_1 and E_2 with respect to E_i

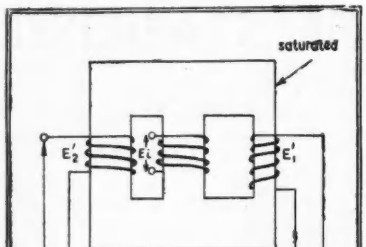

Fig. 4. Modification of the arrangement shown in Fig. 2

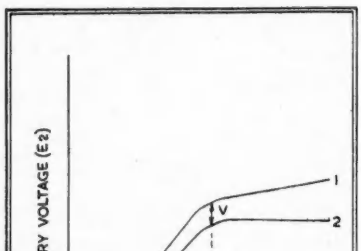

Fig. 5. Characteristics of a transformer having leakage as well as a saturated magnetic circuit

the load directly across the saturated reactor.

Another stabiliser of this type is shown in Fig. 2.[1,3] It consists of two transformers T_1 and T_2, one of which has a magnetically saturated core under the working conditions. The primaries of the transformers are in series and the secondaries, which are connected in opposition, supply the load.

By considering the primaries of the transformers and making further reference to Fig. 1, the variations of the voltages E_1 and E_2 with E_i may be plotted as in Fig. 3. If the saturated transformer develops most of the output voltage, then the secondary voltages E_1' and E_2' vary with E_i in the manner shown in Fig. 3. Thus the output voltage $E_1'-E_2'$ remains nearly constant over a considerable range of E_i.

Many modifications of the above design have been suggested[4,5,6,7] and several three-legged transformer circuits have been used instead of the two separate transformers by simply combining either the primary or secondary windings. One such arrangement[7] is shown in Fig. 4 in which the primary windings of Fig. 2 have been combined. In the circuit of Fig. 2 saturation of transformer T_1 can easily be achieved by making the number of ampere-turns on the primary winding greater than those on T_2. However, in the present case this method cannot be employed as there is only one primary winding; so saturation is produced by using one limb of small cross-section.

A further method for obtaining a constant voltage irrespective of input voltage variations has been described by Bedell and Kuhn.[8] Here stabilisation is attained by employing a transformer which has considerable leakage as well as a saturated magnetic circuit. The secondary voltage of a transformer of this nature does not increase proportionally with the primary voltage as seen in curve (1) of Fig. 5. For voltage stabilisation a relation between primary and secondary voltages as shown in curve (2) is required where above saturation the secondary voltage is constant. To obtain (2) from (1) a curve such as (3) must be subtracted from (1). It is found that (3) is very nearly a straight line, *i.e.*, the amount to be subtracted (v) at any particular value of primary voltage (e) is proportional to that primary voltage. This required quantity v may be obtained by tapping off part of the primary voltage and if it is then subtracted from the secondary voltage a constant output voltage will result. The circuit arrangement used by Bedell and Kuhn is shown in Fig. 6. The secondary windings are placed in series with part of the primary winding and are in opposition to it. The primary winding is on one leg of the magnetic circuit and the secondary on another of smaller cross-section.

Bedell and Kuhn have given results for a 150-watt transformer. An increase of primary voltage of about 30 per cent produces an increase in output voltage of about 2.5 per cent. Units can be produced in which the output voltage remains constant over a considerable range of input voltage. Both the power factor and the efficiency of such a stabiliser are rather low, which may be an objection where large sizes are involved.

Improvements in the operation of some of the above stabilisers have

Fig. 6. The Bedell and Kuhn circuit

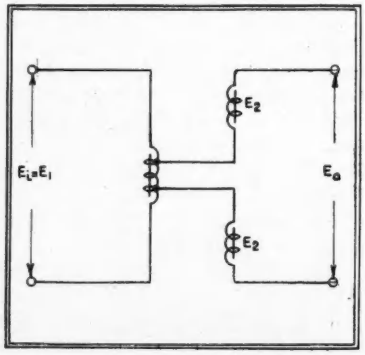

be obtained by inserting capacitors in various parts of the circuits with a view to acquiring better voltage regulation and output voltage waveforms [9]

Limitations of above circuits

The majority of the early designs of stabilisers working on these principles, including the ones already considered, suffer from a number of disadvantages. First, the output voltage waveform is seriously distorted. This is caused by saturation of the iron which results in harmonics in the magnetising current and harmonic currents flowing through impedances in the circuit produce harmonic voltages. Secondly, the regulation is poor so that the output voltage does not remain constant for variations in load current. Further, the output voltage generally depends on the frequency of the input voltage and in many cases the form factor (*i.e.*, the ratio and R.M.S. value to average value) of the output voltage waveform changes with variations in load current which for some applications is a disadvantage.

The " Stabilistor " Equipments

Recent designs have overcome these difficulties, however, one satisfactory arrangement being the " Stabilistor." [10,11,12] Two types of this equipment are available, the first is stabilised against variations in both supply voltage and load current, but there is no compensation for changes in frequency of the input voltage. The second type is designed for a fixed resistive load and is stabilised for changes in both the input voltage and its frequency.

" Stabilistor " Type 1

The circuit of the first type of " Stabilistor " is shown in Fig. 7. It is basically similar to that of Fig. 2. It consists of a transformer T_1, an auto-transformer, T_2, the core of which is worked at a high-flux density and an inductance L in series with a capacitor C. The saturated transformer supplies most of the secondary voltage as in the previous case.

The L-C circuit serves two purposes. It is designed so that at 50 c/s. (the usual supply frequency) it behaves as a capacitative reactance and draws a leading current which tends to offset the effect of the large magnetising current in the transformer primaries. At 150 c/s. the circuit is resonant; it thus provides a short circuit for any third-harmonic currents and therefore no third-harmonic voltages appear across it. Hence, third-harmonics are absent in the output voltage waveform. The units are available in various sizes to give outputs ranging from 30 VA to 1,200 VA at 230 volts.

Performance

It is possible to hold the output voltage constant to within ±2 per cent for input voltage variations of about ±15 per cent and within the range zero to full load. For changes in input voltage of less than ±15 per cent the figure ±2 per cent is correspondingly reduced. The waveform is very nearly sinusoidal; the form factor is within ±.05 per cent of 1.11. Frequency variations affect the output voltage, a variation of ±1 per cent from the nominal 50 c/s. changes the output voltage by about ±1.5 per cent. The power factor of the unit at full load when supplying a load of unity power factor is about 0.7 lagging and the efficiency is about 85 per cent.

" Stabilistor " Type 2

The second type of " Stabilistor " is a modification of the above circuit, it is shown in Fig. 8. It employs a further transformer T_3 and a second filter circuit L_2C_2 which

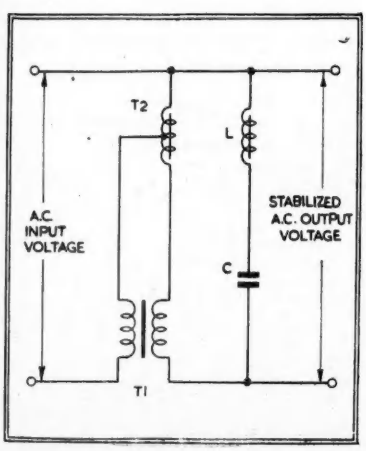

Fig. 7. (*Left*) Original " Stabilistor " circuit

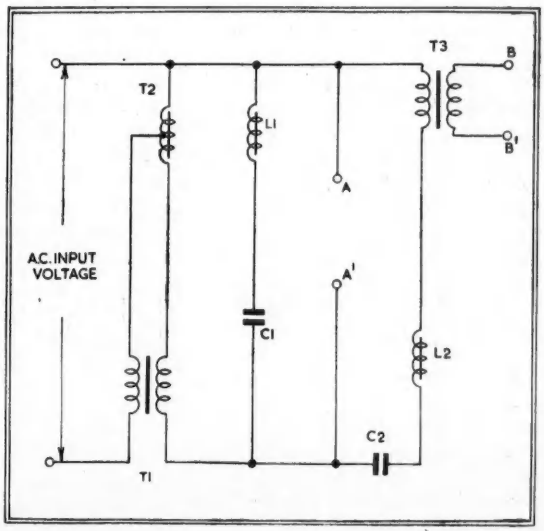

Fig. 8. (*Right*) Second " Stabilistor " circuit

compensates for variations in supply frequency. In this case two alternative stabilised outputs are available but cannot be obtained simultaneously. The output from terminals AA' is the same as that obtained from the first model and is thus constant irrespective of changes in input voltage or load current. The other output from terminals BB' is only suitable for supplying a fixed resistive load but the output voltage is practically independent of variations in both the input voltage and frequency, and, further, the output-voltage waveform is sinusoidal.

These units, as in the case of the first type, are also available in various sizes to give outputs from 30 VA to 1,200 VA at 230 volts from terminals AA' or alternative outputs from 12 to 480 watts at a chosen voltage from terminals BB'.

Performance

In this case a 1 per cent change of input voltage produces a change of 0.04 per cent or less in the output voltage from terminals BB' and a 1 per cent change in the frequency of the input voltage produces not more than 0.05 per cent change in output voltage over the ranges input voltage 200 to 250 volts, frequency 48 to 52 c/s. The power factor of the unit is again about 0.7 lagging, but the efficiency in this case is only of the order of 55 per cent.

The principle of this type of stabiliser is that over a certain range of current flowing through a neon discharge tube (or similar cold-cathode discharge tube) the voltage across it remains nearly constant. This can be seen by reference to Fig. 9 where typical current-voltage curves for several available tubes are plotted. Hence, if a neon tube is placed across a D.C. supply voltage V_i and fed through a series resistance R (Fig. 10), the latter will absorb any fluctuations in V_i. An increase of input voltage increases the IR voltage drop across R and the voltage across the neon tube remains practically constant. Further, an increase of load current results in a drop of current through the tube, the voltage drop across R and the tube voltage both remaining nearly constant. Thus, if on no load the tube takes a current i_{n1} then when a load current I_L is taken the tube current is reduced to $(i_{n1}-I_1)$ approximately. When the load is removed the tube current rises again to i_{n1}. It follows that full load current must not be greater than i_{n1}—(the minimum tube current), and also that the tube current is a maximum at no load.

The value of the resistance R and the input voltage V_i must be chosen so that the tube will "strike" and the current through it is less than the maximum safe current for all values of load current. Too large a value of current through the tube causes an arc which destroys it.

(To be continued)

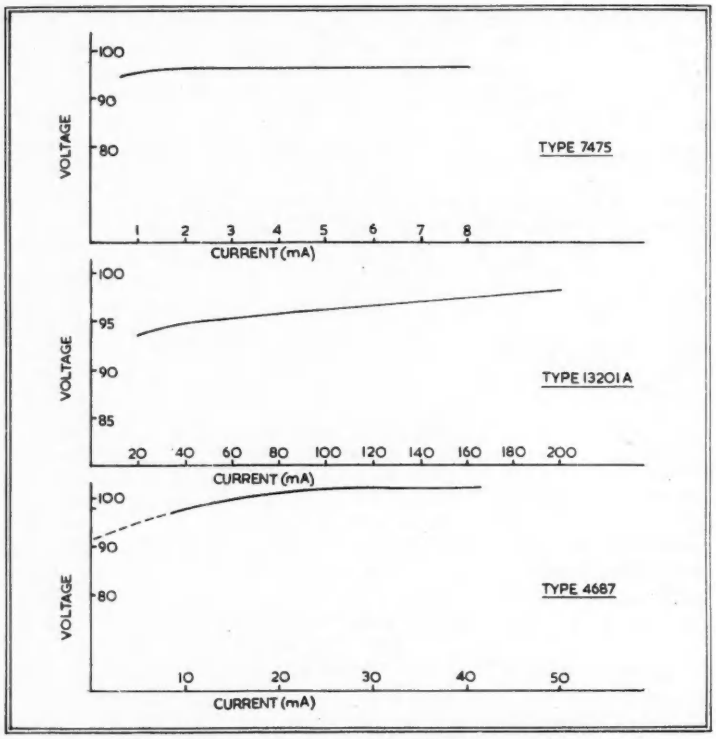

Fig. 9. Current voltage curves for different neon tubes

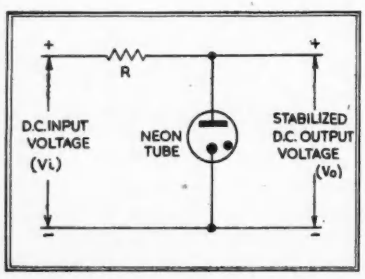

Fig. 10. Basic neon tube stabliser circuit

Bibliography

[1] K. J. Way: "Voltage Regulators using Magnetic Saturation." *Electronics*, 10, 14, 1937.
[2] German Patent No. 338, 677. 1920.
[3] German Patent No. 313, 300. 1916.
[4] German Patent No. 231, 938. 1910.
[5] U.S. Patent No. 1, 896, 995. 1933.
[6] U.S. Patent No. 1, 896, 316. 1933.
[7] German Patent No. 293, 834. 1915.
[8] F. Bedell and J. Kuhn: "Voltage Regulating Auto-Transformer." *Rev. Sci. Inst.*, 3, 20. 1932.
[9] U.S. Patent No. 1, 942, 535. 1934.
[10] Westinghouse publication, E.E. 2-4th edition: "A.C. Voltage Stabiliser—The Stabilistor."
[11] A. H. B. Walker: "The Stabilistor." *Wireless World*, 50, 339. 1944.
[12] British Patent No. 548, 526.

Combined Current and Voltage Feedback

By K. R. STURLEY, Ph.D., M.I.E.E.*

IN amplifiers employing negative feedback it is common practice to apply voltage negative feedback from the output into the cathode circuit of an earlier stage. The feedback voltage is developed across an impedance (generally a resistor) which also carries the anode current variations of the valve in whose cathode circuit it is placed. This leads to current feedback, the effect of which cannot be ignored. Some textbooks take this into account by considering first the reduction of overall amplification due to current feedback and then the reduction of the new value of overall amplification due to voltage feedback, so that the final amplification is given by:

$$A = \frac{A_1' A_2}{1 + A_1' A_2 \beta}$$

where A_1' = amplification of the first stage with current feedback

A_2 = amplification of the remaining stages

and β = voltage feedback factor.

A more rigorous examination of the problem shows that there is inter-action between the current and voltage feedback sources, which modifies the above expression. Though the error is of a second order—its maximum value is of the same order as the voltage feedback factor—the analysis may be of interest to designers and users of precision equipment employing this type of feedback.

Theory

As a rule two factors, overall amplification and equivalent output impedance, require to be known for an amplifier having negative feedback. The second can be derived from the first.

Overall Amplification

The simplest form of circuit is illustrated in Fig. 1. A triode is shown, but a tetrode or pentode could equally well be used. Voltage feedback is supplied via the potential divider R_1 and R_2, and current feedback by R_3. The equivalent circuit is shown in Fig. 2, and the following current and voltage relationships can be derived from it.

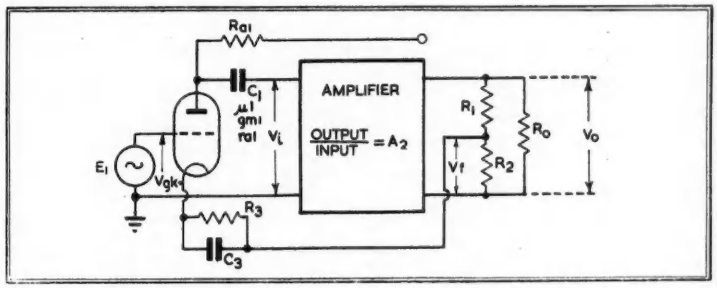

Fig. 1. Simple circuit illustrating voltage and current feed-back

$$E_1 = V_{gk} + V_f \quad \ldots\ldots\ldots\ldots\ldots\ldots \quad (1)$$

$$V_o = -A_2 V_1 = I_1 R_2 + I_2 (R_1 + R_2) \quad (2)$$

$$V_1 = -I_1 R_{a1} \quad \ldots\ldots\ldots\ldots\ldots\ldots \quad (3)$$

$$\mu_1 V_{gk} = I_1 (r_{a1} + R_{a1} + R_2) + I_2 R_2 \quad \ldots \quad (4)$$

where $A_2 = V_o / V_1$ = amplification of the second stage of the amplifier.

R_{a1} = parallel combination of the anode load resistance of V_1 and the input resistance of the amplifier section A_2.

Solving (2) and (3) for I_2 gives

$$I_2 = \frac{I_1 (A_2 R_{a1} - R_2)}{R_1 + R_2} \quad \ldots\ldots\ldots\ldots\ldots \quad (5)$$

Since $V_f = (I_1 + I_2) R_2$

$$\mu_1 V_{gk} = \mu [E_1 - (I_1 + I_2) R_2] = I_1 (r_{a1} + R_{a1} + R_2) + I_2 R_2$$

from which

$$E_1 = \frac{I_1}{\mu_1} \left[r_{a1} + R_{a1} + (1 + \mu_1)(R_1 + A_2 R_{a1}) \frac{R_2}{R_1 + R_2} \right]$$

Overall amplification with feedback

$$A_f = \frac{V_o}{E_1} = \frac{A_2 I_1 R_{a1}}{E_1}$$

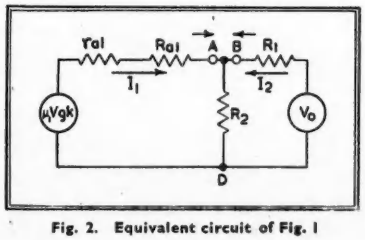

Fig. 2. Equivalent circuit of Fig. 1

$$= \frac{\mu_1 R_{a1}}{r_{a1} + R_{a1} + (1 + \mu_1) R} \cdot A_2 \quad \ldots \quad (6)$$

where $R = (R_1 + A_2 R_{a1}) \frac{R_2}{R_1 + R_2}$

$$= (R_1 + A_2 R_{a1}) \beta = R_2 (1 - \beta) + A_2 R_{a1} \beta$$

and $\frac{R_2}{R_1 + R_2} = \beta$,

the voltage feedback factor.

The expression

$$\frac{\mu_1 R_{a1}}{r_{a1} + R_{a1} + (1 + \mu_1) R}$$

is the amplification of valve V_1 with current feedback provided by an unby-passed resistor R. In appendix 1 it is shown that R is the actual equivalent resistance R_{AD} looking towards V_o, so that it is possible when calculating A_f to consider the circuit as a current feedback stage followed by an amplifier of stage gain A_2. Expression (6) can be rearranged as follows:

$$A_f = \frac{\frac{\mu_1 R_{a1}}{r_{a1} + R_{a1}} \cdot A_2}{1 + \frac{1 + \mu_1}{r_{a1} + R_{a1}} [R_2 (1 - \beta) + A_2 R_{a1} \beta]}$$

$$= \frac{A_1 A_2}{1 + \frac{(1 + \mu_1)}{r_{a1} + R_{a1}} \cdot R_2 (1 - \beta) + \frac{1 + \mu_1}{\mu_1} A_1 A_2 \beta} \quad \ldots \quad (7)$$

where $A_1 = \frac{\mu R_{a1}}{r_{a1} + R_{a1}}$ = amplification of V_1 with no current feedback. The approximate expression gives

$$A_f' = \frac{A_1' A_2}{1 + A_1' A_2 \beta}$$

* *Head of B.B.C. Engineering Training Dept.*

$$= \frac{A_1A_2}{1 + \dfrac{(1+\mu_1)R_2}{r_{a1}+R_{a1}} + A_1A_2\beta} \quad \ldots\ldots (8)$$

because $A_1' = \dfrac{A_1}{1+\dfrac{(1+\mu_1)R_2}{r_{a1}+R_{a1}}}$

In most practical circuits $A_1A_2\beta$ will be the largest factor of the denominator so that A_f' approaches $A_f \cdot \dfrac{(1+\mu_1)}{\mu_1}$ and this represents the maximum possible error. Hence, the approximate result will tend to give a value $\dfrac{100\%}{\mu_1}$ higher than the correct value.

If tetrode valves are used,

$$\frac{1+\mu_1}{r_{a1}+R_{a1}} \approx g_{m1} \text{ and } \frac{1+\mu_1}{\mu_1} \approx 1$$

$$A_f = \frac{A_1A_2}{1+g_{m1}R_2(1-\beta)+A_1A_2\beta}$$

and $A_f' = \dfrac{A_1A_2}{1+g_{m1}R_2+A_1A_2\beta}$

In this instance there is very little difference between A_f and A_f' because $g_{m1}R_2$ is usually much less than $1+A_1A_2\beta$ and has little influence on the result.

The Impedance presented by the Amplifier to the Load R_0

The equivalent output impedance, r_o, of the amplifier can conveniently be found by rearranging (6) into the form $\dfrac{K\,R_o}{r_o+R_o}$. If it is assumed that the second part of the amplifier contains a single valve of constants, μ_2, g_{m2} and r_{a2}, appendix 2 shows

$$r_o = \frac{r_{a2}}{1+\dfrac{\mu_2R_{a1}\beta(1+\mu_1)}{r_{a1}+R_{a1}+(1+\mu_1)R_2(1-\beta)}} \quad \ldots\ldots (9)$$

The approximate method yields

$$r_o' = \frac{r_{a2}}{1+\dfrac{\mu_1\mu_2R_{a1}\beta}{r_{a1}+R_{a1}+(1+\mu_1)R_2}} \quad \ldots (10)$$

Comparison of (10) with (9) will again show that the maximum possible error is of the order $\dfrac{100\%}{\mu_1}$ with r_o' larger than the real value r_o. If tetrode valves are used

$$r_o = \frac{1+g_{m1}R_2(1-\beta)}{g_{m2}A_1\beta}$$

and $r_o' = \dfrac{1+g_{m1}R_2}{g_{m2}A_1\beta}$

and maximum possible error is 100β per cent with r_o' larger than the real value r_o.

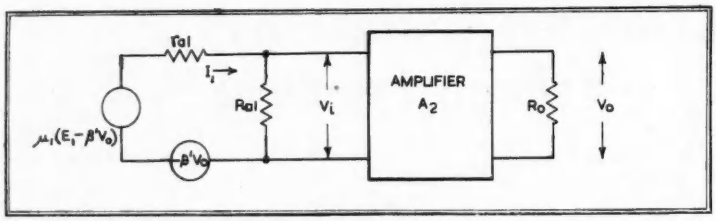

Fig. 3. Equivalent circuit for V_1

An Alternative Solution

The circuit may also be solved as a voltage feedback problem when overall amplification is given by

$$A_f = \frac{A_1A_2}{1 + A_1A_2\beta'\dfrac{1+\mu_1}{\mu_1}}$$

where $\beta' = \dfrac{R_{BD}}{R_1 + R_{BD}}$

and $R_{BD} = \dfrac{R_2 \cdot (A_2R_{a1} + R_1)}{A_2R_{a1} - R_2}$

(*see* Appendix 1).

The factor $(1+\mu_1)/\mu_1$ occurs because the feedback voltage $\beta'V_o$ is injected into the cathode lead and not the grid lead of the valve. Hence it not only subtracts from the input voltage E_1 so that the generated voltage is $\mu(E_1-\beta'V_o)$, but it is in series with the anode cathode circuit of V_1. Hence the equivalent circuit for V_1 is that of Fig. 3, from which

$$V_o = A_2I_1R_{a1}$$

$$= \frac{A_2[\mu_1(E_1-\beta'V_o)-\beta'V_o]R_{a1}}{r_{a1}+R_{a1}}$$

$$= \frac{\dfrac{\mu_1E_1R_{a1}A_2}{r_{a1}+R_{a1}}}{1+\dfrac{(1+\mu_1)R_{a1}}{r_{a1}+R_{a1}} \cdot A_2\beta'}$$

$$= \frac{A_1A_2}{1+A_1A_2\beta'\dfrac{(1+\mu_1)}{\mu_1}}$$

It should be noted that the impedance presented by V_1 to R_2 is not that normally associated with the cathode circuit, *i.e.*, $1/g_{m1}$. The valve is supplying current to R_2 in the same direction as the driving voltage V_o so that it is a source of energy and therefore presents a negative resistance to R_2 making the total resistance R_{BD} (Fig. 2), looking away from V_o, greater than R_2.

Conclusions

If overall amplification alone is considered, an amplifier having a network providing simultaneous current and voltage feedback may be regarded either as an amplifier with voltage feedback alone or as a stage of current feedback followed by an unmodified amplifier. The effect of the combined feedback on the output impedance r_o is predominantly that of voltage feedback, *i.e.*, r_o is always less than the output impedance of the amplifier without feedback, though the current feedback makes r_o greater than the value it would have if voltage feedback alone were operative.

The effect of interaction between the sources of current and voltage feedback is small and it tends to make overall amplification and output impedance smaller than that calculated by ignoring the interaction.

APPENDIX 1

The current voltage relationships for Fig. 4 are

$$E_1 = I_1R_a + (I_1 + I_2)R_c \quad \ldots\ldots (1)$$

$$E_2 = I_2R_b + (I_1 + I_2)R_c \quad \ldots\ldots (2)$$

From (2)

$$I_2 = \frac{E_2 - I_1R_c}{R_b + R_c}$$

and replacing I_2 in (1) gives

$$E_1 = I_1\left(R_a + \frac{R_bR_c}{R_b + R_c} + \frac{E_2R_c}{I_1(R_b + R_c)}\right)$$

Hence looking towards E_2

$$R_{AD} = \frac{R_bR_c}{R_b + R_c} + \frac{E_2R_c}{I_1(R_b + R_c)}$$

Substituting appropriate values for R_b, R_c, E_2 and I_1 from Fig. 2 gives

$$R_{AD}\ (\text{Fig. 2}) = \frac{R_1R_2}{R_1 + R_2} + \frac{A_2R_{a1}R_2}{R_1 + R_2} = R_2(1-\beta) + A_2R_{a1}\beta$$

and $$R_{BD}\ (\text{Fig. 2}) = \frac{(r_{a1} + R_{a1})R_2}{r_{a1} + R_{a1} + R_2} + \frac{\mu_1 V_{gk}}{I_2} \cdot \frac{R_2}{r_{a1} + R_{a1} + R_2}$$

$$= \frac{(r_{a1} + R_{a1})R_2}{r_{a1} + R_{a1} + R_2} + \left[R_2 + \frac{(R_1 + R_2)\ (r_{a1} + R_{a1} + R_2)}{A_2R_{a1} - R_2}\right] \cdot \frac{R_2}{r_{a1} + R_{a1} + R_2}$$

$$= \frac{R_2(A_2R_{a1} + R_1)}{A_2R_{a1} - R_2}$$

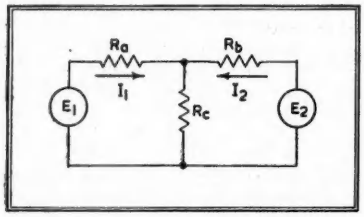

Fig. 4. Equivalent circuit for Appendix 1

APPENDIX 2

$$A_f = \frac{\mu_1R_{a1}A_2}{R_3 + A_2R_4}$$

where R_3

$$= r_{a1} + R_{a1} + (1 + \mu_1)R_2(1-\beta)$$

$$R_4 = (1 + \mu_1)R_{a1}\beta$$

$$A_f = \frac{\mu_1\mu_2R_{a1}R_0}{R_3(r_{a2} + R_0) + \mu_2R_0R_4}$$

if the A_2 amplifier is a single valve stage of valve parameters μ_2, g_{m2}, and r_{a2}.

$$A_f = \frac{\dfrac{\mu_1\mu_2R_{a1}R_0}{R_3 + \mu_2R_4}}{\dfrac{R_3r_{a2}}{R_3 + \mu_2R_4} + R_0}$$

Hence the output impedance of the amplifier is

$$r_0 = \frac{r_{a2}}{1 + \dfrac{\mu_2R_4}{R_3}} = \frac{r_{a2}}{1 + \dfrac{\mu_2R_{a1}\beta(1 + \mu_1)}{r_{a1} + R_{a1} + (1 + \mu_1)R_2(1-\beta)}}$$

Ultrasonic Tests in Agriculture

EXPLORATORY experiments on possible uses in agriculture of ultrasonics, or high-frequency sound radiations produced electrically, are now under way at the U.S. Department of Agriculture Research Centre at Beltsville, Maryland. The following agricultural uses seem to warrant immediate investigations: biological effects of ultrasonics on plant and animal materials, bacterial control, sterilisation or pasteurisation of milk and other food products, homogenisation of milk, emulsification and near dispersion in liquids, coagulation of particles suspended in fluids, control of insects and diseases and production of mutations in grains, bulbs or other plant materials.

Although ultrasonics research by the Department agricultural research engineers is still very much in its initial stages, tests were carried out at Beltsville in which mosquito larvæ were killed by these sound vibrations within 5 seconds. The limited tests showed the percentage of mortality of the larvæ to be directly correlated with the amplitude of the waves and, within limits of the experiment, the percentages did not differ significantly with length of exposure. On examination, mosquito larvæ killed by high intensity sound waves appeared literally to be torn apart. Under similar conditions larvæ of the codling moth required exposures of up to a full minute for killing, but when they were imbedded in fruit these larvæ apparently were undisturbed.

Other preliminary tests showed decreasing vitamin C content in orange juice exposed to the treatment, the decrease depending on the time of exposure. The preliminary work also showed that particles of DDT could be reduced by ultrasonic vibration to sizes smaller than have hitherto been possible to produce by the usual processes.

Fundamental studies yet to be undertaken, according to the Department of Agriculture investigators, necessarily must be aimed at evaluations of frequencies and combinations of frequencies, intensities of wave propagation, radio frequency electromagnetic and electrostatic field effects, heat developed in various products through ultrasonic treatment, length of exposures, and technique of applying ultrasonics.

MICHAEL LORANT.

Britain's First Commercial Ultrasonic Generator

(See Frontispiece on page 154)

THE Mullard Ultrasonic Generator, is the first commercial generator to be produced in this country. It is designed as a laboratory tool for the use of research workers in industry to whose products and processes the science of ultrasonics has special application.

Circuit Details

The generator, comprising a control panel with meters, power oscillator, output voltmeter, relay panel and power supply, is mounted in a tubular frame. Four pull-out handles simplify lifting the generator and a removable panel—with quick release fasteners at the rear of the cover—gives access for fuse and valve replacements.

The R.F. output is generated directly by a silica triode capable of producing one kilowatt of R.F. power. Four plug-in coil assemblies, which are rapidly interchangeable, are provided for operation around nominal frequencies of ¼, ½, 1 and 2 Mc/s.

The valve is matched to the crystal impedance by tapping the anode down the coil in the output circuit. Fine tuning of the output circuit and adjustment of grid coupling are effected by means of variometers.

The oscillator is housed in the upper portion of the frame with the control panel immediately above. On the lower deck is the power supply comprising two grid-controlled mercury vapour rectifiers, the filament transformer and the H.T. transformer.

The quartz crystal is contained in a metal case. It is connected to the generator by means of a co-axial cable. The crystal has silver electrodes, fired on both sides, to which the driving voltages are applied.

To give the maximum ultrasonic output in the forward direction the generating crystal is air backed. The limitations on the temperature at which the transducer can work are set by the polythene of the cable and the rubber sealing rings. If silastic rubber is used and the back of the holder is adequately cooled, the crystal can safely be immersed in liquids at temperatures up to at least 150° C.

The Neutralisation of Input Capacitance on L.F. Amplifiers

By V. H. ATTREE, B.Sc.(Eng.)*

WHEN an amplifier is fed from a high resistance generator (*e.g.*, a photo-tube), the frequency response of the arrangement is normally determined by the product of the generator resistance and the total stray-capacity at the input. In order to obtain a good response the usual practice is to make the stray-capacitance as small as possible, and then, if necessary, to reduce resistance. Unfortunately, any reduction in the resistance lowers the signal level. This is inconvenient, especially when the subsequent amplifier is direct-coupled, as it means that the amplifier gain must be increased. A better approach, therefore, is to neutralise the capacitance at the input: an improved frequency response may now be obtained *without* loss of signal level. The neutralising is best achieved with a simple correcting amplifier which can also be used to give a low-impedance feed to the main amplifier.

The principle is shown in Fig. 1. R_o is the high impedance generator, C_o represents the total capacitance at the amplifier input while C_1 is the neutralising capacitor. Assuming that the amplifier is perfect, so that the gain is $\times m$ at all frequencies, then zero current will flow through R_o when:

$$C_o\frac{de_1}{dt} = C_1\ (m-1)\frac{de_1}{dt}$$

i.e., $C_o = C_1\ (m-1)$

If this condition can be achieved then the frequency response will be uniform at all frequencies. Now in a practical case C_o is small, perhaps 10 of 20 $\mu\mu$F, so that it is better to use a low value of m which will make C_1 of the same order as C_o. An obvious choice for m is $\times 2$, giving correct neutralisation when $C_1 = C_o$. The use of a low gain has the further advantage that the performance of the correcting amplifier may be made virtually independent of valve characteristics.

In a practical circuit there is a small distributed capacitance associated with the generator itself. This distributed capacitance cannot be neutralised by feedback through C_1, so that the extension of frequency

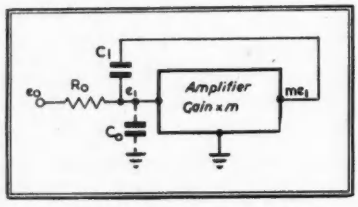

Fig. 1. Principle of operation

range obtainable is not unlimited. In most cases an improvement of about ten times is possible.

The limitations imposed by the distributed capacitance at the input enable the frequency response required in the correcting amplifier to be estimated. If f_o is the frequency at which the uncorrected input circuit is 3 db. down (*i.e.*, $2\pi f_o C_o R_o = 1$), then the response of the correcting amplifier should be uniform up to about 30 f_o. Furthermore, it is unnecessary for the response to extend below about 0.3 f_o. With a simple resistance-capacity amplifier it is sufficient that the two frequencies where the response is 3 db. down should be about 0.1 f_o and 100 f_o. These figures are, of course, empirical, but they give a useful starting point for the design.

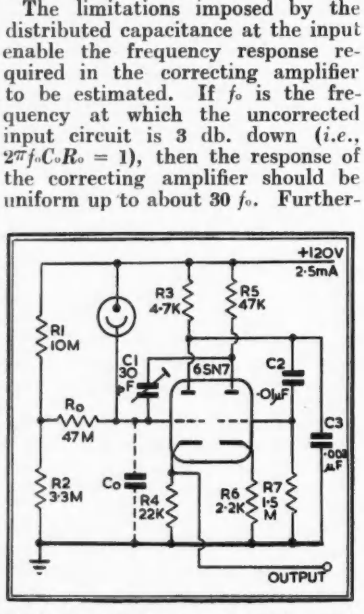

Fig. 2. Neutralising on a photo-tube circuit

In a practical case it was required to record a very small mechanical movement by means of a spot of light illuminating a high-vacuum photo-tube. The frequency response was to extend from zero (d.c.) up to 1,000 c/s. The circuit used is shown in Fig. 2. The stray capacitance C_o was 30 $\mu\mu$F, which, with an effective photo-tube load (R_1; R_2 and R_o) of 50 M, gives a time-constant of 1.5 m.sec., *i.e.*, f_o is 106 c/s. Thus, the 6SN7 correcting amplifier is required to have a response 3 db. down at about 10 c/s. (0.1 f_o) and 10,000 c/s. (100 f_o). This is accomplished by choosing $R_1C_1 = 15$ m.sec. and $R_2C_2 = 15$ μsec. The gain to the anode of the first triode is made small ($\times 0.2$) so that the increase of input capacitance by Miller effect is negligible. The overall gain, from the grid of the first triode to the anode of the second, is almost exactly $\times$ 2. The cathode of the first triode feeds the subsequent D.C. amplifier which is of relatively low gain. The signal level at the cathode is, of course, substantially the same as at the photo-tube.

Frequency response curves are readily obtainable by injecting a tone to the earthy end of R_2. Without neutralisation the response is 3 db. down at 100 c/s. while, with optimum adjustment of C_1, this is improved to 1,100 c/s. Too great a value for C_1 causes a rise in the response at about 900 c/s. while further increase in C_1 results in oscillation.

The use of neutralisation to reduce the input capacitance in radio transmitters and tuned R.F. amplifiers is well known but little use has been made of the technique at low frequencies. When the frequency is low the effects of unwanted inductance are negligible and, providing the distributed capacitance in the source resistance is not excessive, a considerable reduction in effective input capacitance is possible. The separate, low-gain, correcting amplifier is not absolutely essential as a suitable in-phase feedback voltage may be derived from the main amplifier. However, experience has shown that the separate amplifier arrangement is to be preferred. In a recent paper to this Journal Hughes† has mentioned the limitations set by valve input capacitance when using electronic methods of measuring dosage; it is probable that neutralisation would be of value in this application.

* Biophysics Research Unit, University College, London.

† Hughes, H. A., *Electronic Engineering*, *21*, 1949, p. 80.

Frequency Allocation for Five Channels and Recommendations for Receivers for Asymmetric Sideband Reception

Frequency Allocation Plan

THE frequency band from 41.0 Mc/s. to 66.5 Mc/s. is at present available for the television service, but there is reason to hope that within the next few years it may be extended to the full band of 41.0 Mc/s. to 68.0 Mc/s. which was allocated to television by the Atlantic City Conference.

A plan for allocating the frequencies in this band has been agreed to by the Television Advisory Committee and by the Radio Industry Council, and is indicated in Fig. 1. By adopting asymmetric sideband transmission, five independent channels will be obtained, as soon as the full band up to 68 Mc/s. is available. This number of channels is essential if a large part of the population of this country is to receive a television service on this waveband, for experiments have shown that the sharing of a channel by television transmitting stations is satisfactory only if the stations are separated geographically by 800 miles or more.

The Alexandra Palace transmission is to remain unchanged in its characteristics, *i.e.*, no attenuation of the upper sideband is to be introduced at the transmitter, so as not to react unfavourably on the large number of existing receivers in the London area which rely largely on reception of the upper sideband to preserve their overall video response.

It will be seen that in each channel the spacing between sound and vision carriers is standardised at 3.5 Mc/s. and that the spacing of the vision carrier of any of the new channels from the sound carrier of the channel next higher in frequency is 1.5 Mc/s. No serious difficulty should be experienced in receiver design in discriminating sufficiently against adjoining channel interference, because of the asymmetric response characteristics which will in any case be necessary.

The design of the vision chain of all future transmitters will permit, as at Alexandra Palace, the transmission of vision signals substantially undistorted in amplitude and phase up to a vision frequency of 2.75 Mc/s. The carrier and the complete lower-frequency sideband of the amplitude modulated vision signal, together with the upper sideband for vision frequencies up to 0.75 Mc/s., will be transmitted substantially unattenuated and with negligible phase distortion. This corresponds to a pass band of 3.5 Mc/s. in width. For vision frequencies above 0.75 Mc/s. the upper sideband will be considerably attenuated.

Channel 4 has already been allocated to the Sutton Coldfield transmitter, whose vision carrier frequency will therefore be 61.75 Mc/s., with a pass band extending from 59.0 to 62.5 Mc/s. The sound carrier frequency will be 58.25 Mc/s. and will be amplitude modulated. The allocation of Channels 2, 3 and 5 to transmitting stations to be erected after Sutton Coldfield has not yet been decided, but it is probable that Channel 5 will be the last to come into operation, because agreement to the extension in this country of the television band from 66.5 Mc/s. to 68.0 Mc/s. must first be obtained.

Receiver Characteristics

The technique to be used in the reception of the asymmetric sideband vision transmissions originat-

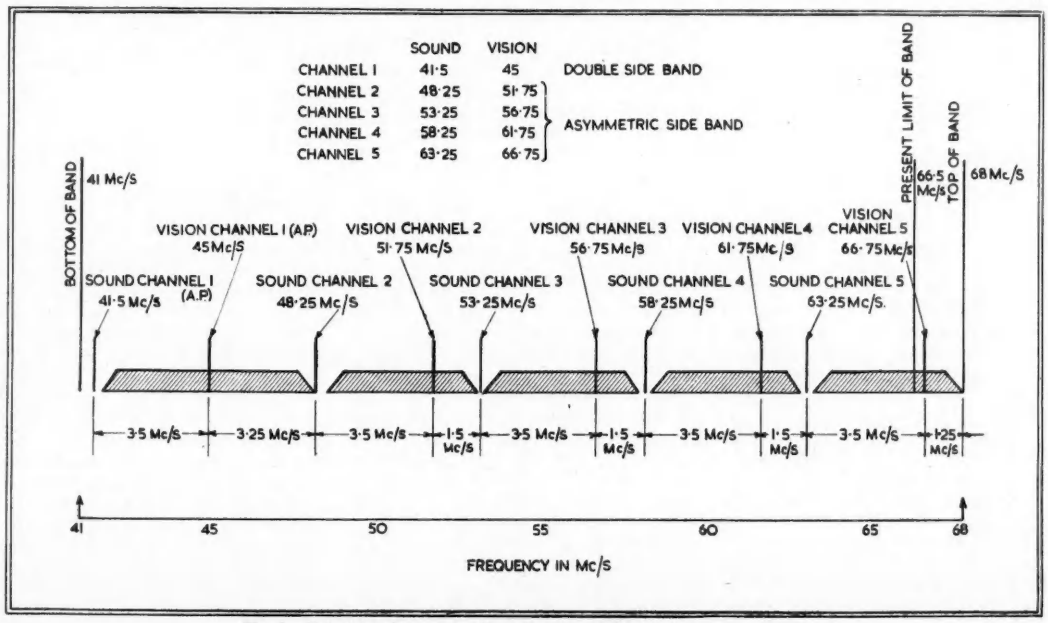

Fig. 1. Television frequency allocation plan within the band 41 — 68 Mc/s.

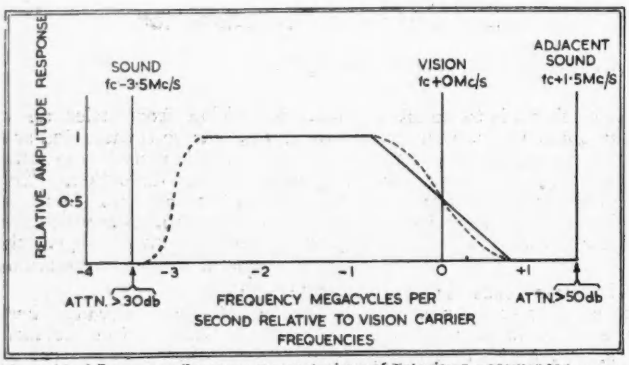

Fig. 4. Ideal Frequency Response Characteristic of Television Receiver for B.B.C. Transmissions

ing from B.B.C. television transmitters will be similar in some respects to that used in television receivers in the U.S.A. for transmitters operating according to the F.C.C. Standards of Good Engineering Practice. The lower, instead of the upper, sideband will, however, be used to provide the vision signal.

An idealised frequency-response characteristic for a receiver is shown in Fig. 2, and this characteristic is summarised in Table I:

TABLE I

Part of Frequency Band Megacycles per second	Receiver Response Per cent
(fc − 2.75) to (fc − 0.75)	100
fc	50
above (fc + 0.75)	0

The shape of the response curve of the receiver between the frequencies of $(f_c - 0.75)$ and $(f_c + 0.75)$ Mc/s. is indicated in the diagram, the idealised curve being shown by the full line. It is not, however, necessary in practice that the linear relationship indicated should exist, the actual requirement being that for vision frequencies up to 0.75 Mc/s. the total response of the receiver to the lower and to the upper sideband frequency should be 100 per cent. In practice, the response curve of most receivers will probably be similar to that shown by the dotted line in the diagram.

It is not feasible to specify the permissible limits of phase distortion in the receiver, because in practice these limits will be determined by a compromise in design between the cost of mass-produced receivers and the degree of visible picture distortion which can be tolerated. The problem is further complicated by the transient distortion inherent in an asymmetric sideband system (*see*, for example, Kallmann and Spencer, *Proc. I.R.E.*, December, 1940, page 557).

The vision receiver, while preserving substantially 100 per cent response down to a frequency of $(f_c - 2.75)$ Mc/s., will need to attenuate, by at least 30 decibels, the sound carrier on $(f_c - 3.5)$ Mc/s. in order to avoid interference on the picture from the sound modulation of the adjacent channel. The more sensitive type of receiver will also need to attenuate by at least 50 decibels a signal on $(f_c + 1.5)$ Mc/s., in order to allow for a sound channel on that frequency, on the basis that in fringe areas of reception the field strengths of the wanted and unwanted television transmissions may be approximately equal. Less discrimination may perhaps suffice for receivers intended only for more local reception, but it cannot be too highly stressed that interference on the picture due to a beat frequency of 1.5 Mc/s. is very easily visible.

Reception of Alexandra Palace

A receiver designed according to these principles will also be suitable for receiving the transmissions from Alexandra Palace, despite the fact that this station will continue to radiate both sidebands. The same fundamental design of receiver will, therefore, serve for the reception of all British television transmissions as at present proposed, whether the adjustment for the desired channel be made by the tuning of a beating oscillator in a superheterodyne receiver, by the trimming of pre-set signal-frequency circuits, or by ganged circuit tuning arrangements. Information supplied by:—

Engineering Information Department,
The British Broadcasting Corporation,
Broadcasting House, London, W.1.

Ultrasonic "Stethoscope" for Testing Generator Rotors

AN ultrasonic "stethoscope" that enables engineers to explore solid pieces of steel as much as 30 ft. thick by means of sound waves is being used successfully by the American Westinghouse Company to assure flawless quality in its giant electric generators.

The new technique beams ultra high frequency sound waves through massive steel parts. The reflected sound reveals the quality of the metal with all the accuracy of a super X-ray while penetrating thicknesses that X-rays cannot reach. By checking that all the rotor shafts are free of internal flaws, Westinghouse scientists ensure that they will stand the strain of making 3,600 revolutions a minute under working conditions.

An application of wartime developments, the ultrasonic process is based on the same principle as radar, but whereas radar projects radio waves through the air, the high frequency sound projector sends waves of sound through solid metal.

A crystal, similar to the crystal used in most record player pick-up arms, changes electrical impulses into sound waves, which are projected through the metal. Tiny cracks, cavities or foreign particles in the metal reflect sound back to the crystal, and these reflexions, changed back into electrical impulses, appear as bright, vertical lines on the viewing screen of an electronic receiver.

By measuring the time it takes the sound waves to go through the metal and bounce back to the crystal, metallurgists can locate any flaw exactly. When the metal is flawless all the way through the sound waves reflect from the opposite side of the object.

In addition to testing generator rotors, the ultrasonic technique is used also for testing other metal parts ranging from 25/100ths of an inch to 30 ft. thick. X-ray, which is used in many quality tests, is practical only for metal thicknesses up to about 6 in.

Among the giant machines being produced by Westinghouse with the aid of the ultrasonic equipment are large steam turbine generators, some of which are rated above 100,000 KW. The rotors for these huge generators are 40 in. thick.

M. LORANT.

Televising the 1949 Oxford and Cambridge Boat Race

By T. C. MACNAMARA and P. A. T. BEVAN*

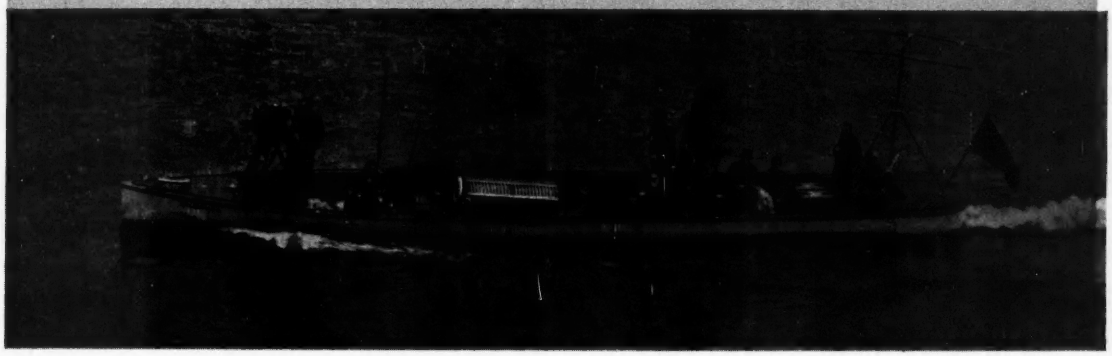

THE B.B.C.'s successful television broadcast of the whole of the Oxford and Cambridge Boat Race from start to finish on Saturday, March 26, can reasonably be said to represent a further milestone in the history of television outside broadcast engineering technique. In the past it has been feasible to televise only the start and finish of the race from the shore, using the two massive pre-war control room units, each of which comprises the apparatus for three camera channels and six microphones, permanently rack-mounted in vans constructed on bus type chassis. The new E.M.I. and Pye outside broadcast television equipments recently brought into service to supplement the pre-war units are, however, constructed on the portable unit principle and may readily be removed from their transporting vehicle and installed at sites which were previously inaccessible to the pre-war equipments because of their fixed construction in the van.

This feature of easy portability has proved invaluable in practice, because not only has it enabled the number and scope of possible television outside broadcasts to be vastly increased, but the labour of installing the equipment and running the cables to the camera positions has been much lessened and the time necessary to complete the installation greatly reduced.

The actual apparatus units, which are carried in light tubular steel racks are considerably lighter and smaller than their pre-war counterparts owing to the use of miniaturised components and valves and the adoption of new and improved circuits.

Experience with these light-weight equipments encouraged the B.B.C. engineers in the belief that a television broadcast of the complete Boat Race could be achieved by mounting a single camera with the minimum of associated apparatus in a river launch following the race. Linkage of the picture to a shore station or stations whence it could be relayed to Alexandra Palace for broadcasting could, it was thought, be effected by a low-power radio transmitter operating in the very high frequency or microwave bands.

The choice of a camera fell upon an instrument incorporating a pick-up tube of the Image Orthicon type and provided with a four-lens turret for which a range of lenses was available.

The considerations dictating this choice were several. First, the sensitivity of such a camera is very high so that there would be a good chance of obtaining a workable picture even on a dull day.

Secondly, this particular camera equipment has been designed for extreme portability, at the expense of some of the facilities normally required for outside broadcasts of the more orthodox type, and the bare necessities of equipment required for its efficient operation are built into four suitcase containers of average weight of about 50 lb. each.

The unit is thus very suitable for use in places where weight and space are at an extreme premium and where the cueing, intercom and preview facilities required for a normal multi-camera outside broadcast can and must be dispensed with.

Considerable thought was devoted to the choice of a vision transmitter and its operating frequency for the purposes of radio linkage. A microwave transmitter provided with a 4 ft. paraboloid reflector was available, but after due consideration its use was abandoned. The reasons for this decision were two-fold. First, grave doubts were felt as to the safety with which a 4 ft. paraboloid could be mounted in a small launch.

A second reason was that as a consequence of the high gain required for the successful operation of microwave links in which the power available is limited to a few milliwatts, the beam emitted is only a few degrees wide, and it was not thought that such a narrow beam could be consistently brought to

* Engineering Division, B.B.C.

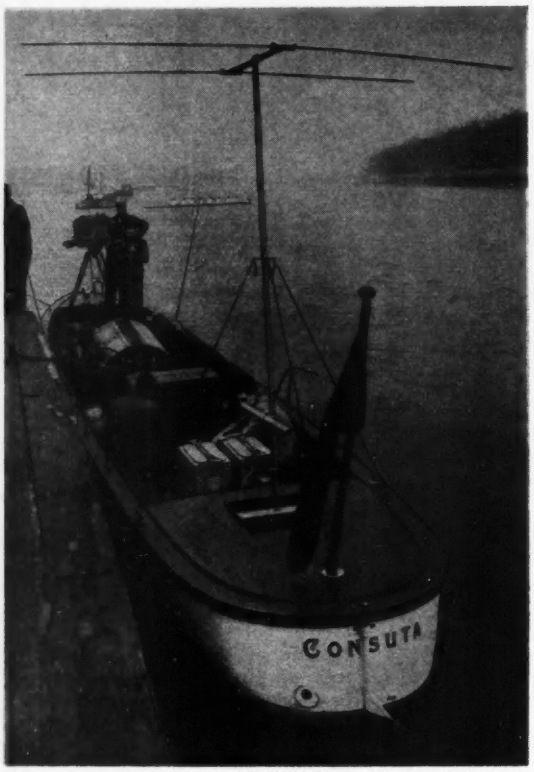

The 63 ft. launch "Consuta" showing the two units forming the Pye portable vision transmitter and the transmitting aerial

The petrol engine generator set providing the power supplies for the whole of the equipment can be seen immediately forward of the transmitter. The Marconi camera is mounted in the bows

bear on a remote receiving paraboloid from a boat which, if the water was choppy, might roll considerably.

Consequently a small portable transmitter designed to give an output power of 25 watts at peak white on a radio frequency between 50 and 60 Mc/s was chosen as an alternative more likely to give successful results under the conditions which would be experienced in the boat.

The problem of a suitable power supply for the equipment was by no means simple as the total consumption was some 3 KVA at 230 V 50 cycles. To obtain such an output for any reasonable period from a battery-driven inverted rotary would require batteries of great weight. Moreover, the difficulties associated with the frequent charging necessary during the tests on the river would have been extremely inconvenient.

Attention was turned, therefore, to the use of a petrol-driven generator set, which at first sight would appear to be a simple solution of the difficulty. Reflexion, however, shows that the qualities required of such a generating set are not easily realisable. For example, it must have a high degree of freedom from mechanical and exhaust noise, because a healthy bark or loud valve clatter could not be tolerated in close proximity to the launch carrying the B.B.C. sound commentator. Moreover, the engine must be free from excessive vibration which would upset the operation of the delicate apparatus. Also the generated voltage and, above all, the frequency of the supply must be stable within very close limits if violent flashing and travelling stroboscopic humbars are to be avoided in the transmitted picture.

It will be appreciated that the requirements imposed by the foregoing are extremely stringent, especially when coupled with the further purely practical necessity that the engine generator unit must be small enough to be accommodated in the launch and light enough to be taken aboard without too much difficulty.

The B.B.C. engineers had available, however, a type of small portable petrol electric generator capable of delivering sufficient output incorporating a four-cylinder water-cooled engine with built-in radiator and capable of exceptionally smooth and quiet running. The set was fitted with a high-grade sensitive governor, which held the frequency sufficiently close to 50 cycles to satisfy even the exacting requirements of the television equipment.

The camera, which weighed approximately 100 lb., was effectively floated on rubber cushions, and the tripod was secured by stays formed of heavy elastic. The camera was raised to a height of some 6 ft. above the water to give the best angle of elevation to the shot consistent with safety and operational convenience.

The elaborate anti-vibration mountings were necessary on two main counts. First, the pick-up tubes are unavoidably somewhat microphonic and any appreciable vibration generates spurious signals which appear as horizontal black lines across the picture. Secondly, any vibration of the camera lens system causes the optical image to vibrate upon the photo-cathode of the pick-up tube and this, coupled with the slight memory phenomena experienced in all tubes of the storage type, causes a reduction in definition.

This effects a softening of the transmitted image, resulting in an "out-of-focus" appearance in the final picture. The magnitude of the effect increases with the focal length of lens used, and with lenses of the telephoto type the loss of definition can be very serious indeed owing to

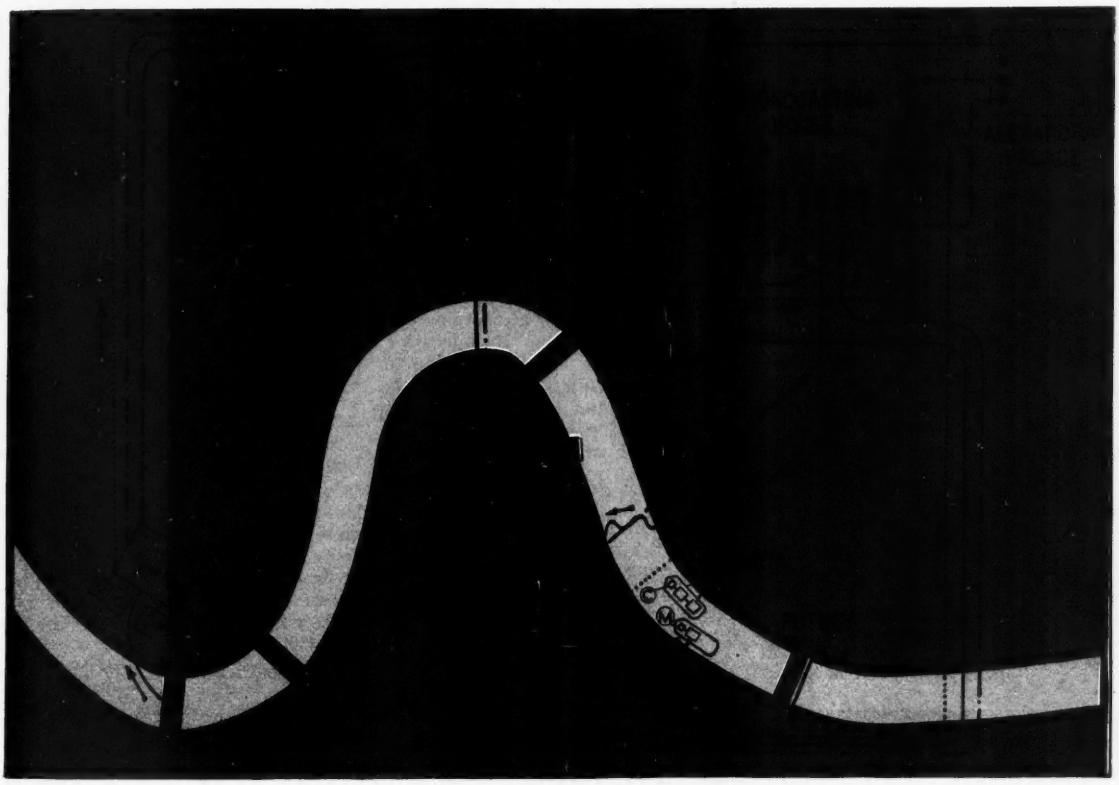

Map showing division of river into three sections. The receiver in the first section is situated on the Surrey side of the river on the roof of Harrods depository and receives pictures from the "Consuta" from the start at Putney to a point nearly opposite Harrods and close to Hammersmith

The second receiver located at the Metropolitan Water Board pumping station on the Middlesex side beyond Hammersmith Bridge picks up after Hammersmith Bridge and functions as far as Barnes Bridge. The final section of the course and the finish of the race is covered by a third receiver having an aerial mounted on a fire escape positioned a few yards downstream from Chiswick Bridge.

the large optical leverage involved.

The camera control equipment was disposed immediately aft of the camera and the transmitter and petrol generator set were stowed in the stern. The transmitting aerial was rigged astern and arranged to give horizontally polarised radiation.

The aerial was of the straightforward horizontal half-wave dipole type with a single reflector element to direct the main radiation lobe towards the aerials of the relaying vision receiver sites on the shore.

The use of horizontally polarised radiation for the transmission of the pictures from a launch was decided upon because under the special conditions encountered with a low aerial on the river, horizontally polarised waves were found to give substantially steadier propagation conditions and to be far less subject to the effects of random reflexions from buildings and high ground than vertically polarised waves.

CODE

———	VISION LINE ROUTE
.....	SOUND LINE ROUTE
—·—·—	CONTROL LINE ROUTE
∿∿∿	RADIO LINK
—|—|—	TELEVISION RECORDING CONTROL LINE
C	CAMERA
M	MICROPHONE

With the very high carrier frequencies necessary for high definition television transmission, the resulting reflexions from nearby buildings and from the four bridges spanning the river over the course constituted the greatest difficulty of this broadcast, since it will be appreciated that the reflected waves can give rise to multiple images and violent variations in the strength of the vision signals received from the launch at the shore relay receiving point. For this reason, and because the bridges form a natural barrier to the radio waves, the useful operative range of the launch transmitter was rather restricted, and to obtain consistently satisfactory reception it was necessary to divide the course into three sections and to establish three shore relaying receiving stations to cover the whole of it.

In order not to break the continuity of the pictures transmitted during the race at times when the transmitting launch was close to or

passing under the bridges, and thus in an area where violent reflexions made its signals unusable, fixed shore cameras were also stationed at the Harrods Depository and Metropolitan Water Board sites. Shots from these cameras were switched into the picture relaying network during the periods when pictures received from the launch were unsuitable; they also served to give a different angle of view and a better indication of the relative position of the Oxford and Cambridge boats as they passed these points. In addition to these continuity cameras, three shore cameras were also provided at the start at Putney and two more at the finish, thus making eight cameras in all. From this point of view alone the Boat Race broadcast constituted the most ambitious vision equipment set-up the B.B.C. have so far attempted.

The line, cable and repeater network required to relay all these picture sources to Alexandra Palace for broadcasting was necessarily somewhat complex and was provided by the Post Office Engineering Department.

A general appreciation of the circuits involved can be obtained from the diagram. The circuits were part normal telephone line, equalised and phase corrected for wideband television transmission, and part coaxial cable.

The selected picture from the shore-based cameras at Putney was routed through the Broadcasting House television repeater station to Alexandra Palace, but in the case of Harrods and the Metropolitan Water Board sites the selected picture (launch or shore camera) had first to be routed via Riverside Exchange to Chiswick Exchange where they met the pictures coming from the finish at Mortlake.

The appropriate changeover from the initial pictures received at Harrods to those received later at the Metropolitan Water Board was made at Riverside, and the change from Metropolitan Water Board to the Mortlake pictures of the finish was made at Chiswick Exchange. From Chiswick a coaxial cable delivered in sequence the selected pictures to the Broadcasting House repeater station whence they were passed to Alexandra Palace by means of the special balanced television cable. The illustration also indicates the routing of the engineering control lines associated with this vision network, the route of the television sound commentary lines from the start and finish, and the radio link sound commentary given from aboard the sound launch "Magician," which commentary was transmitted to viewers and Home Service listeners alike during the period of the race itself.

In view of this necessary arrangement of vision routing it was not possible to arrange for all pictures to be made available simultaneously at a central point so that programme production in the normal sense was not feasible for this broadcast.

The weather inevitably plays an important part in a television broadcast of this sort. Fortunately, however, the day was clear and fears of the consequences of rain on the inadequately weatherproofed equipment in the launch evaporated in the sunshine.

The light value was so high, in fact, that with the launch camera lens stopped down to F.22 (the smallest aperture available with the iris provided) the incident light was too great easily to be handled and it became necessary to fit a filter. In spite of the inevitable early troubles the whole of the equipment behaved most satisfactorily during the race itself and viewers' reactions suggest that the attempt was indeed very worthwhile.

The broadcast was a concerted effort on the part of the television manufacturers, including E.M.I., Pye, Limited, Marconi's Wireless Telegraph Co., Ltd., and others whose equipment was used, the Post Office Engineering Department who provided the vision cable equipment and the B.B.C. Specialist Engineering Departments who planned the broadcast and operated the equipment, in collaboration with the Television Outside Broadcast Engineering Organisation.

Another view of the "Consuta" with its portable television equipment

The camera is mounted on a tripod carried on a rubber cushioned supportingplatform to insulate it from vibration set up by the launch engine. The crew consists of driver, camera man, camera control operator, transmitter operator, engine attendant, aerial steerer and sound communication operator, together with two reserve technicians

Cathode-Ray Tube Applications in Photography and Optics†

PART II

By CARL BERKLEY* and RUDOLF FELDT*

Gear and Sprocket Studies

ONE of the basic problems in the motion picture industry is that of obtaining accurate repeated sprocket teeth on motion-picture cameras and that of obtaining accurate repeated sprocket perforations on motion picture films and papers.

If these perforations or sprocket teeth are not properly made, then the final theatre image will weave up and down or from side to side or jump erratically as anyone who has seen prints of old movies may readily testify. The accuracy and reproducibility of these perforations and sprocket teeth may be easily studied by oscillographic methods. These methods involve a combination of optical and electronic magnification of the defects encountered. In order to display these defects on a cathode-ray oscilloscope, a scanning technique is adopted in which the scanning element consists of a slit or small aperture placed in front of a photocell. The output of the photocell is then applied to the vertical plates of the oscilloscope, after amplification, if necessary. In testing sprocket teeth or the gears on motion picture cameras, for example, the gear may be rotated at the operating speed and the outline of the gear tooth picked up by means of the scanning slit. Fig. 15 shows the optical setup just described. If the sweep frequency on the oscilloscope is equal to the time it takes for one tooth to pass the slit, then a repeated image of each tooth appears on the oscilloscope screen. This image may have been enlarged optically before reaching the slit and may then be further enlarged by means of the vertical and horizontal amplifiers on the oscilloscope. Any eccentricity in the gear tooth, either angular or or radial, may readily be seen and amplified to the desired value. As shown in Fig. 16, this method has the advantage that it tests the gear

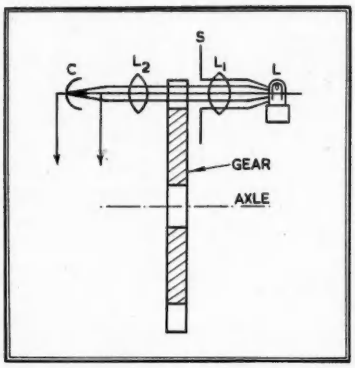

Fig. 15. Optical setup for gear testing

under operating conditions so that effects of dynamic unbalance or bearing eccentricity are apparent. A vibration pickup may similarly be used in a conventional manner on the oscilloscope to determine which of the gears in a motion-picture camera is causing a repeated noise in the sound track, for example, by correlating the frequency of repetition of the pattern on the oscilloscope with the rate at which various gears move in the camera. In the case of sprocket-perforation-accuracy measurements exactly the same technique is used, the scanning slit being similar to a sound track slit.

This technique of combined optical and electronic magnification will be illustrated by a very similar example, taken from another field, the testing of razor blades. Razor blades are manufactured in a continuous strip which are sharpened on special grinding machines and are then honed and stropped. A microscope and photocell has been used to look at the edge of each blade as it passes by. Fig. 17 shows the optical setup used. The sweep frequency on the oscilloscope is synchronised with the repetition rate of the blades. The resultant patterns are shown in Fig. 18. The dips between patterns are due to the gaps between blades. The sensitivity here is equivalent to a magnification of 1,000 : 1, about 100 of this magnification being accomplished optically, the other factor of 10 accomplished electronically in the oscilloscope amplifier so that a deflection of one inch on the cathode-ray tube screen is equivalent to 1/1000th of an inch on the razor blade. The pictures show a number of blades which are perfect and some blades which have nicks about 1/2000th of an inch deep.

Automatic Printer Adjustment

One of the basic problems in the photo finishing industry is to obtain a properly exposed and developed set of prints from a widely varying series of negatives. This is usually accomplished by a hit-or-miss system which is based solely upon the judgment of the printer in the darkroom. This precludes accurate duplication of results from one photofinisher to another. Some attempts have been made to use electronic exposure controls which automatically adjust at least the exposure for these widely varying negatives. The darkroom operator

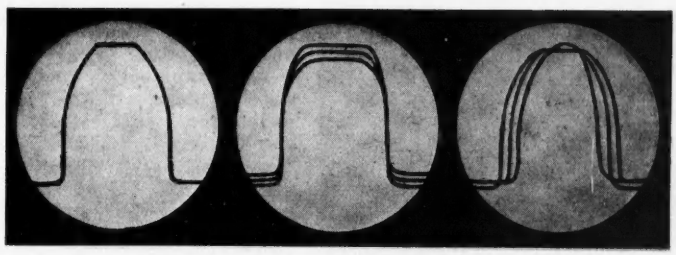

Fig. 16. Typical patterns obtained with perfect and defective gears

(a) A perfect gear (b) An eccentric shaft or angular spacing (c) Irregular tooth size

† Based on a paper presented at the National Electronics Conference, November 5th, 1948.

* Allen B. DuMont Laboratories, 1000 Main Avenue, Clifton, New Jersey.

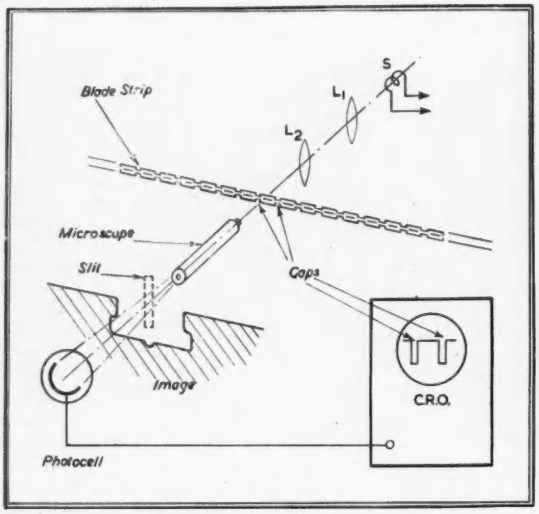

Fig. 17. Optical setup for razor blade testing

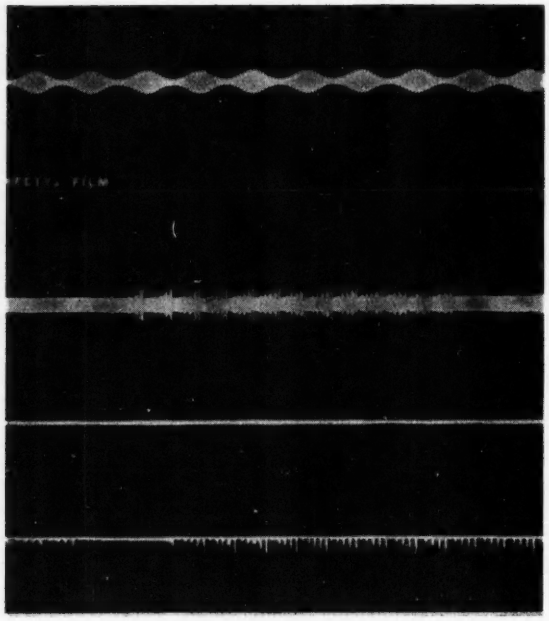

Fig. 19. Typical cathode ray tube sound track recordings

still has to select the proper grade of printing paper.

A suggested approach to this problem is to print each negative to suit the personal preferences of ths customer instead of attempting to make all pictures of uniform quality. These personal desires with respect to the artistic effect of the print may be determined by means of electronic equipment operating as follows:

This machine, to be placed in the photofinisher's anteroom, consists of a simplified television imaging system such as a flying spot scanner. When the negative is placed into the machine, a positive image appears on the cathode-ray tube screen which shows how the final print will look. There may be only two adjustable controls on this machine, one controlling the gamma of the image and calibrated directly in the contrast grade of the printing paper. The second control is a brightness control calibrated directly in exposure time required for the selected brightness. After adjusting the controls until a picture having the proper aesthetic effect is obtained, the print can be made under well-defined reproducible conditions.

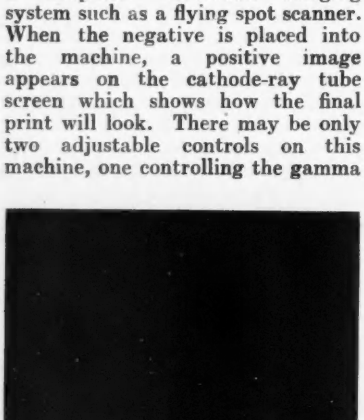

Fig. 18. Pattern obtained with razor blade tester, showing a number of defective blades, compared with the edges of good blades

Another and more serious problem exists in colour film printing. It is very difficult to make a good colour print from a colour negative without a trial-and-error process. Much of the guesswork can be taken out of this process by applying the above principles to it. Various methods have been proposed in the patent literature to enable an electronic viewing of a negative and a suitable phase and colour reversal so that the appearance of a positive may be directly determined and the proper corrective measures taken.

Sound Recording

Since the earliest days of the cathode-ray tube, various types of tubes have been proposed for use as sound recording elements in sound on film systems. One of the first to suggest this use and to build cathode-ray tubes for this purpose was Von Ardenne, who built the equipment and actually made such recordings. It is possible to make such sound recordings with perfectly standard cathode-ray oscillograph equipment and a continuous recording camera such as the Type 314 camera. Fig. 19 shows some examples of such sound recordings made by voice modulating a 100-Kc. signal in a mixer tube and recording the result with the camera. These signals may readily be played back on the oscilloscope by scanning them with an illuminated slit in a conventional manner. The advantage of the cathode-ray oscilloscope here is that there is no limitation as to frequency response in the recording element itself, since modulating frequencies as high as desired may be recorded and played back. Obviously a cathode-ray oscilloscope is the best tool for properly studying, adjusting and describing the performance of electronic motion picture sound equipment. Such phenomena as hum, cross modulation and inter-modulation may readily be recorded by standard

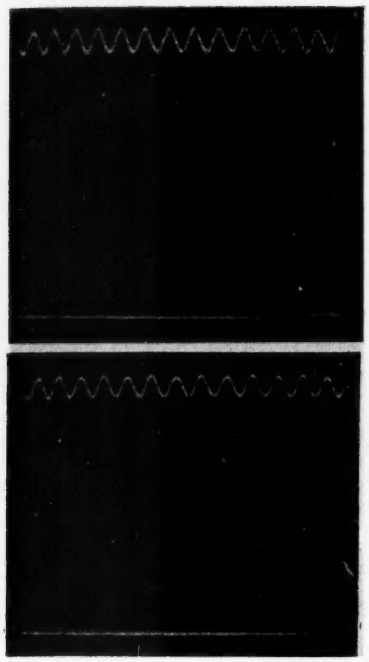

Fig. 20. Ripple in small A.C. operated lamp

(a) Showing incandescence

(b) Showing nigrescence

These recordings made with repeated sweep

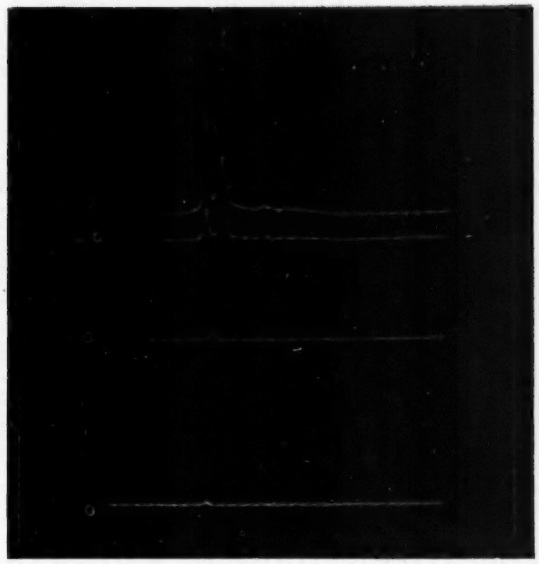

Fig. 21a. Spectograms of a low pressure mercury arc at various times after starting. (Figures in diagram relate to seconds after starting)

techniques and many references appear in the literature to these methods.

Study of Light Sources for Ripple

One of the difficulties in illuminating a motion picture set with tungsten lamps is that the power supply must, in many cases, be direct current in order to avoid a brightness flicker in the final image due to the 120 cycle variation in the light emitted from A.C.-operated lamps. This variation causes an annoying beating of the frame frequencies with the ripple frequency, and if a camera is to be operated at high speed this flicker may become very annoying. Particular difficulty is encountered in cases where a motion picture has been made at high speed of a phenomenon illuminated by A.C.-operated lamps and then the film printed on a high-speed printer also operated on A.C. Occasionally the dips in the exposing light output and printing light output become synchronous, with resulting light fluctuation in the final projected image. In recent years, many new types of filament construction have been adopted to minimise this defect and to produce as little ripple as possible. The best way to study this ripple is on a cathode-ray oscilloscope, equipped with D.C. amplifier, so that the ripple may be expressed as a percentage of the total light output. Figs. 20a and b illustrate some typical examples of the ripple percentage of a certain lamp. In making these oscillograms, it was also of interest to determine which of these lamps lent themselves most readily to modulation for the transmission of information over light beams. The incandescence and nigrescence curves can easily be seen and studied on these cathode-ray oscillograms.

Colour Specification

Another problem in photography and optics is the proper description and specification of various colours. A cathode-ray tube spectrograph for accomplishing this very result has been described by 'the authors.' Figs. 21a and b show some typical cathode-ray-tube-produced spectograms obtained with this instrument. This instrument produces the colour information required within 1/120th of a second. The information may readily be put into various other standard forms such as into International Commission on Illumination Co-ordinates. To obtain the I.C.I. co-ordinates requires certain standard integrations, additions and divisions which may be accomplished electronically, by converting the information into digital form. To indicate these I.C.I. co-ordinates, a cathode-ray tube again is a useful tool since a universal I.C.I. colour diagram may be placed over the face of the tube, the position of the spot enabling reading of the co-ordinates directly. The output of a three-filter photometer may also be shown in this manner instantaneously on the cathode-ray tube screen.

Another use of the cathode-ray tube spectrograph in optics is in the study of the colour aberrations of

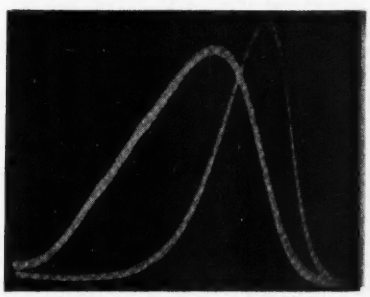

Fig. 21b. Light distribution in image showing chromatic aberration. Pattern at left, at centre of image; at right, at edge of image

optical systems. Fig. 21b shows the colour distribution of the image of a rather poor lens along the axis, and the colour at one of the fringes of the image. Many other uses for this instrument have already been described, such as the immediate drawing of filter-transmission curves or the reaction between chemical solutions, indicating, for example, when a developer has reached the exhaustion stage.

Conclusion

While it has not been possible to give here a complete description of all cathode-ray tube applications considered in optics and photography, it should now be obvious that cathode-ray tubes and oscilloscopes are valuable tools for solving many technical problems. Because of lack of space we have not been able to consider many of these in the detail they deserve.

It has been mentioned at the beginning of this paper that the procedures here suggested could find valuable application in many other industries as well. Choosing the automobile industry as typical, for example, the gloss measurement technique could readily be applied to the paint finish of automobiles. The goniophotometric technique could be used to measure the light distribution from various types of headlights. The techniques used for shutter, flashbulb, and synchroniser testing could be used for studying the operation of the vibrator in the car radio. The cathode-ray-tube-light source could be used as an ignition-timing light. The gear-and-sprocket testing system would find obvious application and the vibration studies could be carried out to indicate the degree of riding comfort obtainable with particular suspension methods.

It is hoped that this brief consideration of some applications will stimulate the use of these oscillographic techniques in as wide a range of problems as possible.

Bibliography

[1] M. Von Ardenne, "Cathode-Ray Tubes," pp. 462-473. 1939. Sir Isaac Pitman & Sons.

[2] R. Feldt and C. Berkley, "The Cathode-Ray Spectrograph," *Proc. N.E.C.*, pp. 198-211. October, 1946.
"Infra-red Spectrometer," *Electronic Engineering*, October, 1948.

A Chart for Hyperbolic Functions

By H. M. CLARKE, M.Sc., M.I.E.E.*

A SIMPLE aid in calculating exponentials can be readily made from single log paper having uniformly scaled abscissæ as in Fig. 1. Draw the straight line from the origin to $A = 2.303$ $y = \log 10$, thus the ordinate through any point X between $A = 0$ and $A = 2.303$ cuts this line at a value of $y = E^{A}$. Moreover, the straight line from $A = 2.303$, $y = \log 1$ to $A = 4.606$ $y = \log 10$ can be used to determine $y = E^{A}$ for A lying between 2.303 and 4.606, provided y is now taken as $\times 10$ of previous ordinate scale value. Similarly, for each addition to the abscissæ of 2.303, the vertical scale can be taken as $\times 10$ of the previous value.

Furthermore, if a straight line be drawn from $A = 0$, $y = \log 10$ to $A = 2.303$, $y = \log 1$, ordinates at any abscissa A cut this line at E^{A} and for every addition to the abscissæ of 2.303 the scale of y is $\times 1/10$ of the previous value.

To determine cosh A or sinh A, E^{A} and E^{-A} can be read from the appropriate ordinates and the value of cosh A and sinh A required are $1/2\times$ their sum or difference. Tanh A and coth A are similarly obtained.

A common size of log paper is 25 centimetres representing log 1 to log 10, and abscissæ up to 25 or 50 centimetres. The former can be readily used up to $A = 2.303$ and the latter $A = 4.606$, using 10 centimetres to the unit. This paper allows reading to 0.5 mm. or about 1/250.

The accuracy of reading the ordinates being limited to 1/250 precludes the use of this method for A is greater than 4.606 for hyperbolics. Beyond this value, E^{-A} may be ignored in the calculation of cosh, sinh, tanh, and coth, etc. It may, however, be used for E^{A} or E^{-A} to 1/250.

Fig. 2 is a modification of Fig. 1 which may have more appeal than the latter.

An example of the use of graph may be seen at $A = 1.6$, E^{A} is read as 4.97 and E^{-A} as 0.203 giving sinh A as 2.383, cosh A as 2.586, and tanh A as 0.922.

By expansion, corresponding values are 2.3738, 2.577, and 0.921.

* Electrical Engineering Department, King's College, London, W.C.2.

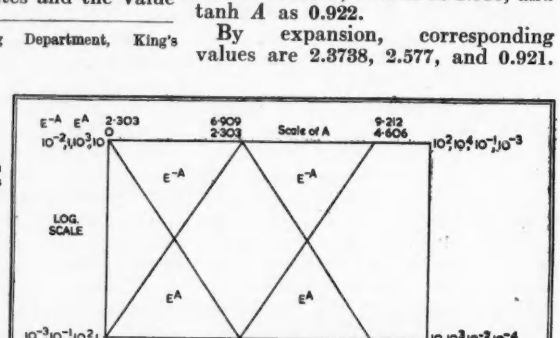

Fig. 1. Construction of chart for functions E^{A} and E^{-A}

$$\cosh A = \frac{E^{A}+E^{-A}}{2}$$

$$\sinh A = \frac{E^{A}-E^{-A}}{2}$$

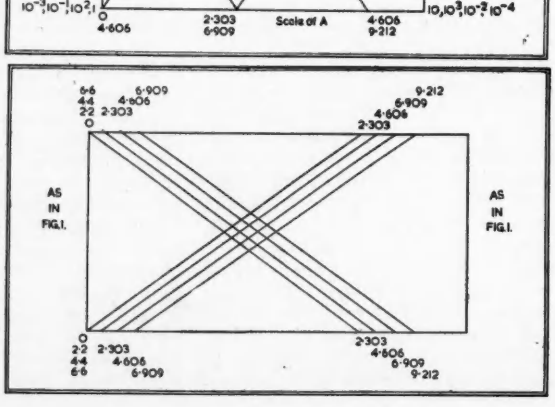

Fig. 2. Modification of Fig. 1 showing alternative construction

Portable Counter for Geological Research

By O. J. RUSSELL, B.Sc., A.Inst.P.*

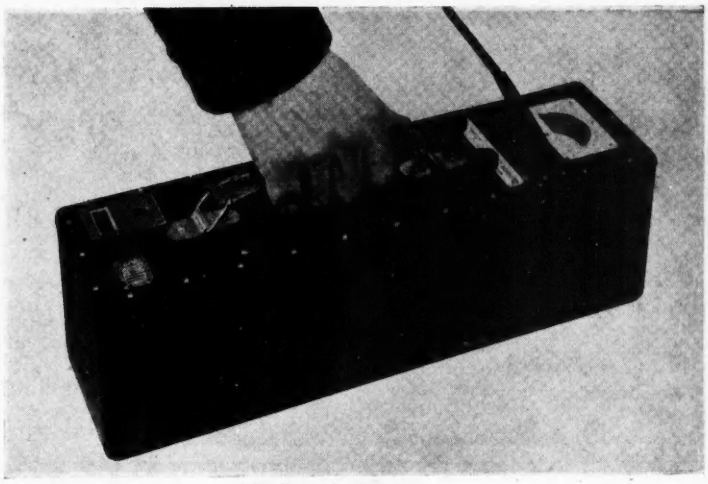

The Portable Counter

THE portable counter illustrated has been developed for prospecting for radio-active uranium and thorium minerals, geological investigations generally, and as an ultra-sensitive detector of lost or mislaid radium. It should be noted that quite apart from locating radio-active ores, the investigation of the slight residual activity present in virtually all minerals offers a new and exciting field for geological research, as changes in strata can be identified in this way.

Results of investigation of the feeble activity present in all normal mineral ore should be of the utmost importance to geologists, as this new geophysical technique offers a fresh angle of attack upon many problems. Suggested applications are the confirmation of theories of the genetic relationship between rocks, the measurement of the gamma radiation from oil or rare mineral bearing formations, the investigation of the potash content of rocks, and as an aid to geological mapping. A paper (No. 91) presented at the 18th International Geological Congress (London, 1948) reviewed the question of geological mapping employing surface measurements with the aid of this portable G.M. counter. This field of research is so new that the full extent of its possibilities cannot yet be assessed; however, it is clear that it offers a new and exciting field for research.

The necessity for precision measurements and high sensitivity for these refined investigations profoundly influences the design of the instrument, especially as the paramount consideration is portability. To combine sensitivity with ruggedness, while keeping size and weight to a minimum, has necessitated the abandonment of conventional types of design commonly employed in portable G.M. equipments employed for uranium location or the recovery of lost radium tubes. The equipment developed by the Alltools Research Laboratories, employs a miniaturised multi-valve circuit embodying a valve extinction circuit and a patented multi-vibrator circuit for pulse equalising and limiting functions. The equipment is, in fact, a scaled down version of a standard laboratory Geiger-Muller counter. All power supplies, including bias and a variable V.H.T. supply for the G.M. tube are derived from an external 6-volt accumulator as the basic power source. A light-weight motor cycle type is ideal. An accumulator which is readily rechargeable from a base station motor car, if necessary, has been chosen in preference to the doubtful advantages of dry batteries, which tend to deteriorate rapidly when under tropical climatic conditions. A built-in meter enables the battery voltage to be checked, together with the V.H.T. voltage applied to the G.M. tube.

A direct counting circuit is employed, so that precision indications of small variations of the apparent background may be made. This sensitivity is such that the normal statistical limitations apply. As the cosmic ray background count on the built-in G.T.21 tube is approximately 200 per minute variations in local activity which are a small fraction of this can be readily detected. A variation equivalent to 4 per cent of the cosmic ray background can be detected by a three-minute count, and even smaller differences by longer counts. Such sensitivity enables small—but geologically significant—traces of activity to be detected on the surface. The use of headphone methods, or even "count-rate" meter type indicators, cannot give any approach to this degree of sensitivity. The use of counting methods was adopted as a result of a careful study of the possibilities of existing equipments, and was embodied in the first model produced for the National Physical Laboratory. The value of the counting technique has been amply proved during five years' refinement of the design. The sensitivity enables deposits to be located, when more deeply buried, and the extent and direction of ore deposits to be more accurately located, as compared with detectors needing a high activity level before any positive indication is given. The value of this sensitivity has been shown also in the location of lost radium, even when deeply buried. In one fairly recent case, radium was immediately recovered from a site which had been repeatedly and unsuccessfully surveyed by other types of locating equipments.

In the field "iso-active" contours can be plotted if desired, while by means of plugs an external tube can be operated as an alternative to the built-in tube. This enables a probe head containing a G.M. tube to be used in narrow crevices, or an M.R.C. type tube can be employed for tests on powdered rock samples or separates obtained in the field. The unit provides, in effect, mobile laboratory facilities, in a single compact robust unit. Rubber sealing has been extensively employed to give protection in humid climates.

It is considered that the unit

* Alltools Research Laboratories, Ealing.

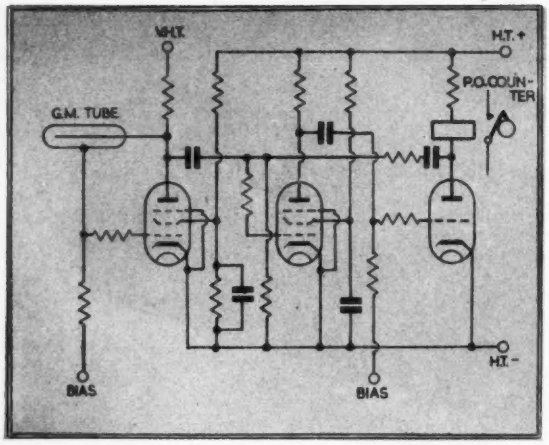

Schematic of Portable Geiger-Muller Counter

represents a considerable advance upon other commercial designs, including those available abroad.

Finally, it may be noted that it is quite general to find uranium minerals associated with other valuable heavy metals such as copper, silver, tin, lead and even gold. Despite the present concentration upon uranium, it is probable that the value of deposits of other valuable metals may be worth far more than the uranium associated with them. Conversely, the examination of mining residues from tin, copper, lead and other deposits may reveal workable concentrates of uranium.

5 to 8 KV Radio Frequency E.H.T. Unit

THIS R.F. oscillator E.H.T. supply unit manufactured by Haynes Radio, Ltd., occupies little space, being about the same in volume as the transformer alone as used for mains connexion.

The circuit consists of a simple R.F. oscillator of the tuned anode type used with a small tetrode valve. A secondary coil of high L/C ratio is coupled to the anode coil and across this an R.F. potential is developed which after subsequent rectification provides in the present instance some 8 KV with an available current up to 300 microamperes. The small rectifier valve used derives its heater current from a coil of a few turns which is linked with the anode coil.

Current for the oscillator is taken from the set H.T. supply and does not exceed 30 mA for the 8 KV output. This additional current is small in comparison with the total H.T. loading and can usually be taken without modification of the H.T. power supply unit. A small reservoir capacitor is charged by the rectifier and the E.H.T. supply is taken off through a limiting resistor.

Voltage adjusting resistors are provided in the anode and screen leads with which by-pass capacitors prevent R.F. leakage to the H.T. supply. The oscillator valve is the 6V6 biased by a leaky capacitor and working with a relatively low screen voltage. Litzendraht wire is used for the anode winding. The E.H.T. coil consists of eight sections, graded in diameter for a uniform voltage distribution. Supported by its wire ends, the rectifier, an EY51, charges a capacitor of 0.001 mfd. rated at 10 KV working. In series with the tall ceramic output terminal is a current limiting resistor of 220,000 ohms.

Total screening is afforded by a strong copper container, possessing the required good conductivity for minimising losses in the coils, to which it must couple in some measure. The heater input is 6.3 V 0.45 A and the H.T. 225/300 V 20/28 mA, connected through a pair of under-base terminals. The container measures 4 in. by 3½ in. by 5 in. high. The oscillator frequency is low, being 100 Kc/s., to give good efficiency as well as to ensure against R.F. brushing and the resulting destructive action of ionisation.

The possible limitation of an available H.T. supply to 300 V has been taken into consideration and the 8 KV output is given when drawing 28 mA. A check of either voltage or current to these limits at the input is desirable to avoid excessive output. Not more than 250 V at 24 mA gives the generally needed 6 KV E.H.T. At 225 V an output of 5 KV is obtained. The facility of obtaining a graded E.H.T. potential up to 8 KV is an advantage and adjustment is effected by interposing a suitable resistor at the H.T. input terminal.

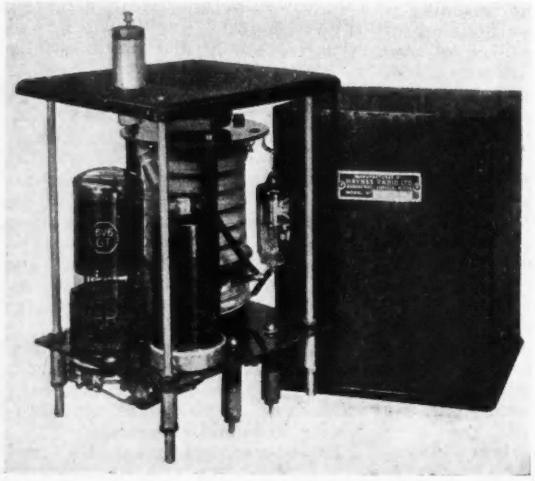

The R.F., E.H.T. unit with cover removed, showing general construction.

The Optimum Performance of a Wave Analyser

By N. F. BARBER, M.Sc.*

THE article shows why the "ringing" of a filter or resonant system sets a limit to the speed with which the spectrum of an electrical signal may be explored by a wave analyser. If a wave analyser is to be fitted with a mechanical drive so that the spectrum is explored automatically, it appears that there are certain optimum conditions which allow a maximum frequency discrimination to be obtained when the spectrum is to be explored in a given time.

The frequencies present in a complicated electrical signal such as the electrical output of a microphone are commonly examined by a wave "analyser" which selects and measures the energy present in any desired narrow range of frequency. The adjustment of a dial determines the frequency selected and this adjustment is usually manual.

The purpose of this article is to suggest that if the tuning dial were provided with a slow mechanical drive, and if the energy output of the wave analyser were recorded continuously by a pen or a camera, the business of exploring the spectrum could be expedited. In some studies it is of importance to obtain the maximum possible information in a brief time and a manual operation of a wave analyser in these circumstances demands considerable attention and much experience on the part of the observer. A manual operation undoubtedly permits greater flexibility in the adjustment of sensitivity and the re-examination of portions of the spectrum which appear to be of greater interest, but an automatic method is speedy and is less trying to the operator.

This suggestion of a mechanical drive is not a new one, but some of the problems which arise in this technique have not hitherto been solved. There are two conflicting aims, one is to provide the greatest possible resolution of frequency and the other is to make the analysis in the minimum time. The phenomenon known as "ringing" makes it impossible to obtain more than a certain degree of resolution in a given time; when the pass band of the filter is very narrow and the selecting dial is rotated rapidly it is found that a single pure tone in the input signal gives rise to an output which builds up rapidly to a maximum near the correct position of the dial, but which decays only slowly and so confuses later signals. The effective pass band in continuous analysis is therefore wider than the nominal pass band of the filter and some errors also arise in the measurement of frequency and amplitude. These points are discussed below.

* *Admiralty Research Laboratory, Teddington.*

The "ringing" of a transient resonance

Fig. 1 shows the calculated transmission of a simple Q circuit on the assumption that the input to the circuit is an electrical signal of constant frequency and amplitude and the natural frequency of the system is changed slowly and continuously. The curves also apply to the converse case of a filter of constant frequency fed with a signal whose amplitude is constant but whose frequency slowly changes. The ordinate of the curve represents the power or square of the amplitude of the transmitted signal on a decibel scale; the abscissa represents the difference between the fixed and variable frequencies expressed as a multiple of the band width of the filter. Curve (a) is the transmitted power when the frequency is changed infinitely slowly, and this curve is the usual characteristic curve of the simple Q filter; the peak of the curve is arbitrarily set at zero on the decibel scale. Curves (b) to (g) show the transmission curves when the rate of change of frequency assumes various values, and the curves are drawn on the assumption that the time increases from left to right in the diagram, though the actual time interval represented by the diagram varies for the different curves, being least for curve (g) in which the frequency is changed rapidly. It will be seen that the transmission of the filter increases smoothly, but decays in a series of beats, which are more pronounced the greater the rate of change of frequency. This beating appears to be an interference between the forced transmission of the filter when its natural frequency is no longer equal to that of the input signal, and the free oscillations of the filter resulting from the energy it acquired near resonance. If in practice it is proposed to use a rapid change of frequency so that the transmission curve is similar to curves (e) or (f) it will probably be desirable to use a recorder sufficiently sluggish to give a fair representation of the transmission curve without these more rapid beatings.

The various curves are labelled with the value of the quantity f'/δ^2 where

$f' = df/dt$ = rate of change of frequency with time,

$\delta = f_0/Q$ = the frequency pass band of the filter indicated by curve (a) of Fig. 1 and is the frequency range within which the transmitted power is more than half the peak value.

It is the value of this parameter which determines the shape of the transmission curve in any specified case. The parameter f'/δ^2 will be referred to as K.

The errors associated with a continuous analysis are evident from the curves of Fig. 1. The peak transmissions of curves (b) to (g) are all less than the peak transmission in curve (a) and the amplitude of the input signal will be correspondingly underestimated; for convenience the peak transmission is plotted against the parameter f'/δ^2 as a continuous curve in Fig. 2. It will also be seen that the peak transmissions always occur a little later than the instant at which the frequency of the filter is equal to the frequency of the input signal, and the estimated frequency of the input signal will be too high or too low, depending upon whether the variable frequency is being increased or reduced; the frequency error is plotted against the parameter f'/δ^2 as a continuous curve in Fig. 3. A further point is that the width of the transmission curve is greater in curves (b) to (f) than in curve (a), and the frequency discrimination in a rapid continuous analysis is therefore always less than the discrimination attainable with a slow

analysis; the width of the various transmission curves, that is the frequency interval within which the transmitted power is more than half its peak value, is plotted against the parameter f^1/δ^2 as a continuous curve in Fig. 4. In estimating the band width a small amount has been added to those curves showing marked beating since it may be necessary to use a sluggish recorder to suppress the beats. The effective pass band is indicated by the symbol δ_1.

Numerical Example

If the filter has a band width of 5 cycles, the transmission curve has a form very nearly the same as the curves (b) to (g) in Fig. 1 when the frequency is changed at the rate of 20, 40, 80, 160, 320 and 640 c/s^2. The associated errors in frequency and power of the signal may be deduced from the curves of Figs. 2 and 3 and they are given in Table 1 together with the effective band width estimated from the curve of Fig. 4.

If it is not proposed to make any corrections to the measured strength and frequency of the signal it is perhaps tolerable to work at $K = 1$. The frequency error is then a little less than half the pass band, as can be seen from Fig. 3, and the power error is about $\frac{1}{2}$ db. as given in Fig. 2. At this parameter the rate of change of frequency is equal to the square of the band width; a filter with a pass band of 5 c/s. would change frequency at the rate of 25 c/s. For more rapid analyses, at higher values of K, some correction might be desirable though it should be noted from Table 1 or Fig. 3 that the frequency error is relatively small since it never exceeds the effective band width of the filter.

TABLE 1
Continuous analysis with a filter whose pass band is 5 cycles wide ($\delta = 5$)

Rate of change $f^1 = df/dt$	Parameter K $= f^1/\delta^2$	Power error	Frequency error	Effective pass band δ_1	Curve in Fig. 1
c/s^2		db.	c/s	c/s	
20	.8	0.6	1.9	6.2	(b)
40	1.6	1.0	3.2	7.2	(c)
80	3.2	1.6	5.0	8.8	(d)
160	6.4	2.9	7.8	12.0	(e)
320	12.8	4.2	12.0	18.0	(f)
640	25.6	6.1	19.5	24.0	(g)

The Technique of a Rapid Analysis

When it is desirable to make an analysis as quickly as possible, the consideration which limits the speed of analysis is not the associated errors in the estimation of frequency and power, for a suitable correction to these measured values can be made from the theoretical curves of Figs. 1, 2 and 3; the limitation is the increased effective band width of a filter used at high values of K. With a given filter a reduction in the time taken to make the analysis is always accompanied by a reduction in the discrimination of frequency; this is illustrated by Fig. 4 where K is proportional to the speed of analysis of a given frequency range and the ordinate δ_1/δ shows the factor of effective increase in the band width. An experimenter working with a given filter may adopt some technique intermediate between taking a long time to make a good analysis and making a coarse analysis rapidly. If it can be said that a sufficiently good analysis would be obtained if the effective band width were twice that of the given filter then Fig. 4 shows that the analysis may be made at a parametric value of 4.0; thus an analysis at an effective band width of 10 c/s. may be made using a filter of true band width 5 c/s. if the rate of change of frequency is 100 c/s., and a spectrum from 0 to 10,000 c/s. would be explored in

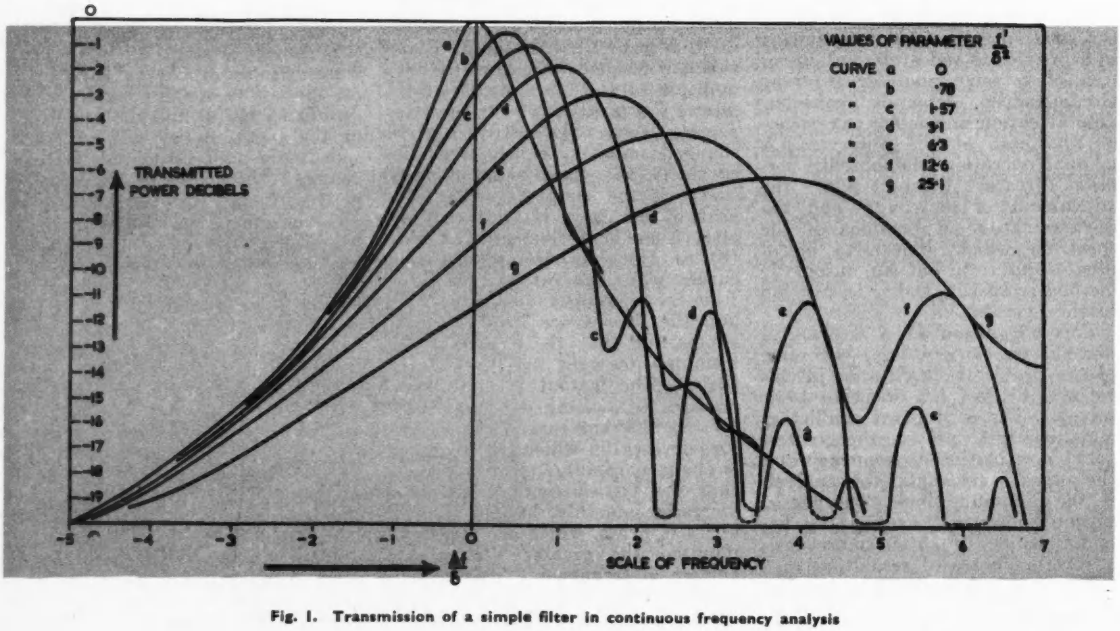

Fig. 1. Transmission of a simple filter in continuous frequency analysis

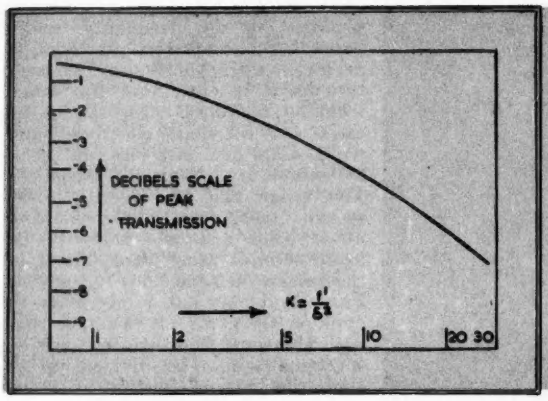

Fig. 2. Power transmitted by a filter in continuous analysis

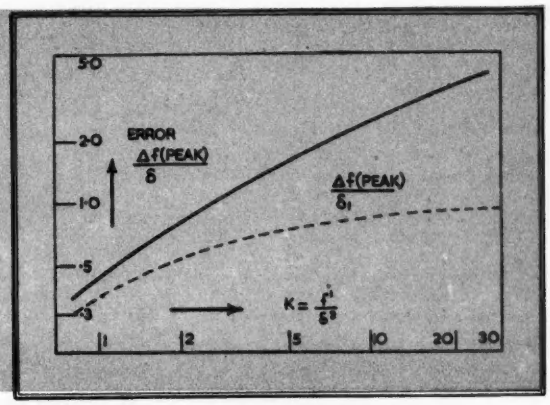

Fig. 3. Frequency lag in peak transmission in continuous analysis as a fraction of the nominal band width δ (full line) and as a fraction of the effective band width δ (broken line)

100 seconds. The errors in the estimates of frequency and power would be 6.3 c/s. and −2.0 db., and it may be thought necessary to make an appropriate correction.

Analysis Using a Constant Parameter

It is possible to arrange the apparatus so that the spectrum is explored in such a manner that the parameter K remains constant throughout the analysis. The advantage of this arrangement is that the corrections to be made to amplitude and frequency are then the same throughout the spectrum; so far as amplitude is concerned it may be unnecessary to introduce any correction if the parameter is kept constant, for it is usually the relative amplitudes of the different frequencies rather than their absolute amplitudes which are of interest. A constant parameter may be arranged in the following ways.

For a filter with a constant pass band δ it is clear from the definition of the parameter

$$K = f'/\delta^2 \quad \ldots\ldots\ldots\ldots (1)$$

that the parameter is constant if f' is constant, or if the frequency of the filter increases (or decreases) in a linear manner with time.

For a filter which is constructed to have a constant Q value over the frequency range, the pass band δ is proportional to the frequency.

$$\delta = f/Q$$

The parameter K may be expressed as

$$K = f'Q^2/f^2$$

and if K is constant

$$\frac{1}{f} = \frac{K}{Q^2}t + \text{constant} \quad \ldots\ldots (2)$$

and the frequency should vary inversely with time.

For a filter of fixed natural frequency f_0 investigating a spectrum of gliding tones such as would be produced by an engine whose speed was gradually falling, it appears that the analysis proceeds at a constant parameter if the engine speed S revs/sec. decreases exponentially. The overtone of frequency f which is being transmitted by the filter must be nearly equal to f_0 and is a multiple f_0/S of the engine speed. It follows that

$$\frac{dS}{dt} = \frac{S}{f_0} \cdot \frac{df}{dt}$$

Since the parameter is given by

$$K = \frac{df}{dt}\,\delta^2$$

and the pass band δ is constant, the analysis proceeds at a constant value of K if df/dt is constant. It therefore follows that

$$\frac{1}{S} \cdot \frac{dS}{dt} = \text{constant} = \delta^2 K/f_0 = f'/f_0 \quad \ldots\ldots (3)$$

and the speed S should change exponentially with time.

It will be appreciated that an analysis need not be made under these special conditions, but that if they are attainable the interpretation of the results is somewhat simpler, a constant value of K leading to a constant power correction.

Optimum Characteristics of a Filter

If a given frequency range is to be explored in a given time, then a filter can be chosen which provides the best possible frequency discrimination. A filter with too wide a pass band is clearly unsuitable and a filter with a very narrow pass band might have to work at such a high parameter that its effective pass band would again be very wide. Between these limits there is an optimum width of pass band and a filter possessing a pass band of about this width provides the best analysis.

The optimum is illustrated in Fig. 5 which is a re-plot of the curve of Fig. 4. The statement of the problem determines the rate f' at which the spectrum must be explored, and in Fig. 5 the effective pass band δ_1 is expressed as a fraction of the known quantity $\sqrt{f'}$ and is plotted against the parameter K. It will be seen that the effective pass band is a minimum in the region of $K = 8$. The effective pass band is then about 0.98 $\sqrt{f'}$ and the nominal pass band is 0.35 $\sqrt{f'}$.

As a numerical example we may suppose that it is desired to explore a spectrum between 50 c/s. and 10,000 c/s. in a time of 10 seconds, and we may consider the cases in which this is done by a filter of constant band width or by a filter of constant Q. If the band width is constant it is evident from Equation (1) that the rate of change of frequency f' must be constant in order to provide a constant value of parameter K. The rate of change of frequency must therefore be

1,000 c/s. very nearly, and at the optimum parameter, $K = 8$, the nominal pass band, δ must be about 11 c/s. The effective pass band in the analysis would be 0.98 $\sqrt{f'}$ or about 31 c/s. If on the other hand the filter is to have a constant Q, it has been shown that the frequency should vary inversely as the time,

$$\frac{1}{f} = \frac{K}{Q^2}t + \text{constant} \quad \ldots\ldots \quad (2)$$

so that for an analysis from $f = 50$ to $f = 10{,}000$ in 10 seconds at the optimum parameter $K = 8$ it follows that

$$Q = 63$$

or the nominal band width at, say, 1,000 cycles is

$$\delta = 1000/Q = 15.8 \text{ c/s.}$$

The effective band width in the analysis at this frequency is .98/.35 times this value or

$$\delta_1 = 44 \text{ c/s.}$$

and the effective Q throughout the analysis is in similar proportion to the nominal Q

$$Q_1 = 23.$$

These two methods of analysis would occupy the same time, but the filter of constant Q would spend relatively more time and give greater resolutions in the lower frequencies.

An optimum condition also appears if it is desired to analyse a given spectrum at a given effective band width or with a given effective Q, for there is a filter which will produce the required analysis in a shorter time than any other. The curve of Fig. 5 serves to interpret the optimum conditions, for it shows how $\delta_1/\sqrt{f'}$ varies with the parameter K. Since δ_1 is prescribed the shortest time of analysis is provided when f' is greatest, that is when $\delta_1/\sqrt{f'}$ is least, at the optimum value of parameter, $K = 8$. The desired filter must have a nominal pass band

$$\delta = 0.35\ \delta_1/0.98 = 0.36\ \delta_1$$

The minimum time may readily be calculated in any particular case since

$$f' = K\delta^2 = 8\ \delta^2$$

for the optimum filter.

Thus if it is desired to explore a spectrum from 50 to 10,000 c/s. with a filter whose effective band width in the analysis is constant and equal to 10 c/s. the filter should have a nominal band width of 3.6 c/s.; the rate of change of frequency should be 102 c/s. and the analysis would therefore take 98 seconds. If it is desired to explore the same spectrum with a filter of constant effective Q equal to 100 the nominal Q of the filter should be

$$Q = Q_1/0.36 = 280.$$

The analysis would occupy a time given by Equation (2) as

$$t = \frac{Q^2}{K}\left(\frac{1}{f_1} - \frac{1}{f_2}\right) = 182 \text{ seconds.}$$

It is worth pointing out that the minimum in the curve of Fig. 5 is very flat. The examples above are worked for a parameter 8, but in practice any convenient value between 2 and 20 could be used without any serious loss in discrimination.

Multiple Filters

It may be impossible for a single filter to explore the spectrum with the desired discrimination in the allowable time, and the frequency range must then be explored by two or more filters working over different sections of the frequency scale. From the examples in the section dealing with optimum characteristics it is clear that the range from 50 to 10,000 c/s. cannot be examined with an effective band width of 10 c/s. in a less time than 98 seconds if a single filter is used. The range can be covered in 50 seconds using two filters working above 5,000 c/s. and below it, or in 33 seconds using three filters in the ranges 50-3,300-6,600-10,000 c/s. Further, it may not be necessary to explore all parts of the spectrum with the same band width, and the spectrum should be divided up so that the various sections can be explored in the same time, the time taken to explore a range of F c/s. is given by

Time of analysis =

$$F/f' = F/K\delta^2 = F/1.04\ \delta_1^2$$

the final expression being obtained by using the optimum relations

$$K = 8 \text{ and } \delta = 0.36\ \delta_1.$$

Thus if the range of 50 to 10,000 c/s. is divided up into ranges of 50-1,000-10,000 c/s. and it is desired to explore these ranges with effective band widths of 10 c/s. and 30 c/s. respectively, the times required are about equal, being given by

$$t_1 = 950/104 = 9.1 \text{ secs.}$$

$$t_2 = 9000/940 = 9.6 \text{ secs.}$$

and by using two filters with nominal pass bands of 3.6 c/s. and 10.8 c/s. working simultaneously the desired analysis is complete in 9.6 seconds.

Fig. 6 shows a series of analyses of the same electrical signal. These analyses were all made in the same

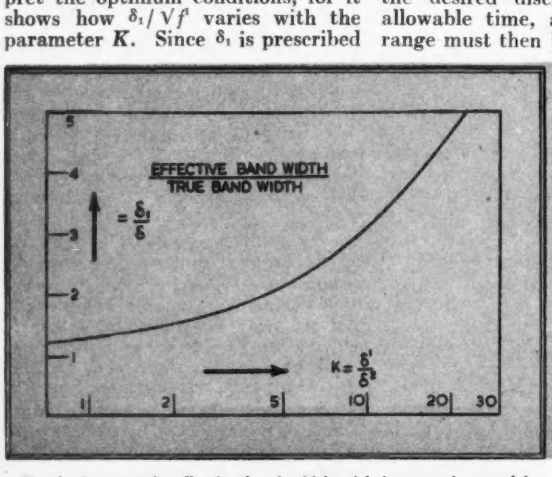

Fig. 4. Increase in effective band width with increase in speed in continuous analysis, the nominal band width being prescribed

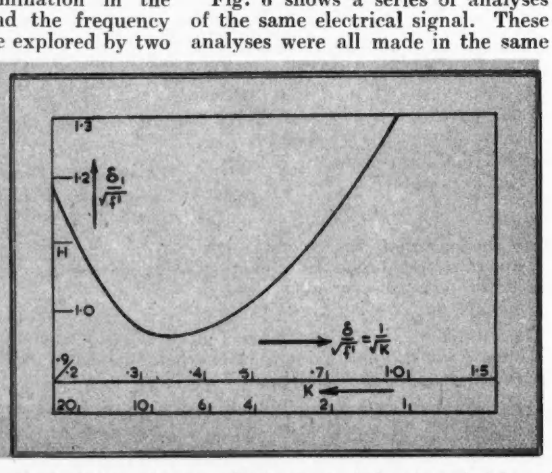

Fig. 5. Relation between effective band width and nominal band width in continuous analysis when the rate of change of frequency is prescribed

time but with filters having different band widths. The parametric values are indicated on the curves. The electrical signal was one with a large number of overtones at equal frequency intervals. When the band width of the filter is very small, that is when the value of the parameter K is large, the various harmonics begin to lose definition. The beats on the decay of each transient resonance are obvious though they have been somewhat masked by the sluggishness of the pen recorder.

The analyses were made with the power-driven machine described by Barber, Ursell, Darbyshire and Tucker[1] which is the one used by this research group for the analysis of ocean wave records, and the true spectrum would consist of a series of isolated ordinates corresponding to the various harmonics of the very complicated wave form of the record. These ordinates are represented by the peaks in the various curves and the degree of resolution of successive peaks gives a good idea of the relative frequency discrimination in the various analyses. The filter had a natural frequency of 135 c/s., but the optimum conditions that this series indicates would be found for analyses at higher or lower frequencies.

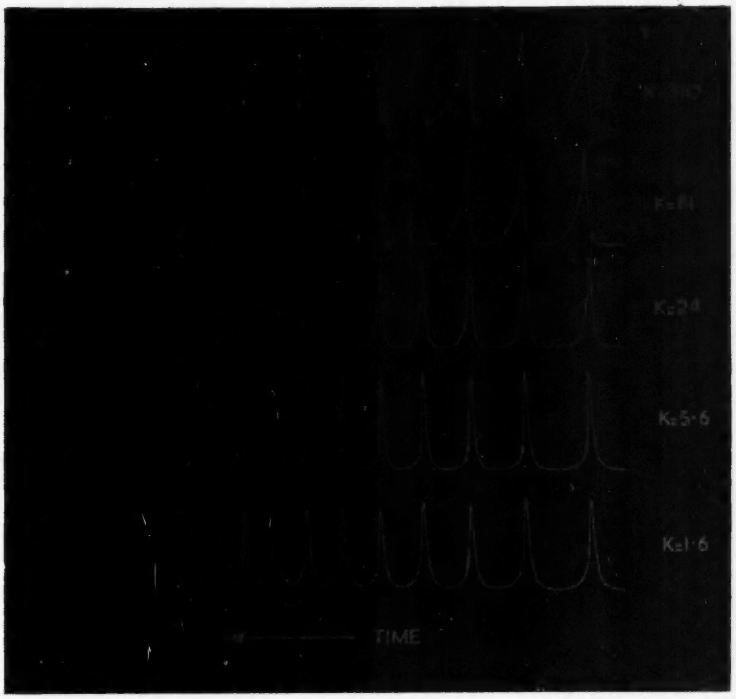

Fig. 6. Examples of the continuous analysis of an electrical signal rich in overtones. The spectrum was explored at the same rate of change of frequency in all cases, but the band width of the filter was varied. When the band width is very small (upper curve) the resolution is bad. This is to be expected by the very large value of the parameter K

Theory

The amplitude of the output signal from a simple Q filter supplied with an input signal of constant amplitude and slowly changing frequency is shown by Barber and Ursell[2] to be given by

$$\text{Amplitude} = \sqrt{(A^2 + B^2)}$$

where A and B are given at any time t by the expressions

$$\left.\begin{matrix} A \\ B \end{matrix}\right\} = \frac{1}{2}\int_0^\infty e^{-n\omega n} \left.\begin{matrix} \sin \\ \cos \end{matrix}\right\} (a\omega tu - \tfrac{1}{2}a\omega u^2)du \quad \ldots\ldots\ldots (1)$$

and the expression is equally applicable to a filter of variable frequency investigating a spectrum of tones of constant frequency. It is convenient to write the result in terms of

f_o the filter frequency $= \omega/2\pi$

f the signal frequency $=$

$f_o + \Delta f = \omega(1 + at)/2\pi$ approx.

δ the frequency pass band of the circuit measured as frequency interval within which the amplitude of the transmitted signal is more than 0.7 of its peak value.

$\delta = 2nf_o = f_o/Q$

f' the rate of change of f or

$f_o = df/dt$ or df_o/dt

Then $\left.\begin{matrix} A \\ B \end{matrix}\right\} =$

$$\frac{1}{2}\int_0^\infty e^{-u\pi\delta} \left.\begin{matrix} \sin \\ \cos \end{matrix}\right\} (2\pi.\Delta f.u - \pi f' u^2)du \quad \ldots\ldots\ldots (2)$$

The Admiralty Computing Service has given tabulated values of the functions

$$\left.\begin{matrix} S \\ C \end{matrix}\right\} = \sqrt{k}\int_0^\infty e^{-v} \left.\begin{matrix} \sin \\ \cos \end{matrix}\right\} (2T.\sqrt{kv} - kv^2)dv \quad \ldots\ldots\ldots (3)$$

and it can readily be shown that the expressions (2) and (3) are related and that

$$\left.\begin{matrix} A \\ B \end{matrix}\right\} = \frac{1}{2\pi\delta\sqrt{k}} \left\{\begin{matrix} S \\ C \end{matrix}\right.$$

and amplitude $= \sqrt{S^2 + C^2}/2\pi\delta\sqrt{k}$

$\sqrt{A^2 + B^2} =$

provided that

$T = \Delta f/\delta\sqrt{k}$

$k = f'/\pi\delta^2$

The curves of the present report are the values of $\sqrt{S^2 + C^2}/\sqrt{k}$ plotted in terms of the variable

$T\sqrt{k} = \Delta f/\delta$

which is a scale of frequency in units of the band width δ. The parameter K which denotes the various curves is simply related to k

$K = \pi k = f'/\delta^2$

and this parameter is also used as abscissa in the curves of Figs. 2, 3, 4 and 5.

Attention is directed to other mathematical treatments of "ringing" given by Lewis[4] and Hok.[5] References to work on "ringing" prior to 1935 are given by Meyer.[6]

The article is published by permission of the Admiralty.

References

[1] N. F. Barber, F. Ursell, J. Darbyshire, M. J. Tucker: "A Frequency Analyser used in the Study of Ocean Waves." *Nature*, Vol. 158, p. 329. Sept. 7, 1946.

[2] N. F. Barber and F. Ursell: "The Response of a Resonant System to a Gliding Tone." *Phil. Mag.* (in press).

[3] Admiralty Computing Service "Tables of the integrals C(t) and S(t)." Report S.R.E./A.C.S. 90. 1945.

[4] F. M. Lewis, "Applied Mechanics" Trans. A.S.M.E. Vol. 54, p. 253, 1932

[5] Gunnar Hok, "Response of Linear Resonant Systems to Excitation of a Frequency Varying Linearly with Time". J. App. Phys., Vol. 19, p. 242. 1948.

[6] E. Meyer, "A Method for Very Rapid Analysis of Sounds". J.A.S.A., Vol. 7, p. 88. 1935.

AN ELECTRONIC STOPCLOCK

By K. J. BRIMLEY, B.Sc.*

IN the testing of delay detonators a requirement arose for apparatus capable of timing intervals of up to 12 seconds to an accuracy of better than 1/100 second. The apparatus had to be robust and reliable and capable of accurate operation by unskilled labour, which meant that the reading must be direct and simple.

A variety of schemes was put forward and a number of commercial instruments considered, but nothing existed which completely fulfilled the requirements.

The resulting instrument (*see* Fig. 1) has been completely satisfactory and is capable of considerably improving on the specification laid down. In addition to its use as a timing apparatus, the circuit has interesting possibilities as a high speed mechanical counter, and has been tested as such.

Fundamentally the arrangement is a high speed mechanical counter, in which a Scophony "torque motor" type BTM is used, in conjunction with two thyratron inverters. This combination totals the quarter cycles of a standard oscillator within the interval defined by two trigger circuits, the latter being operated by the events forming the interval.

In this case the two events were, respectively, the firing current of the detonator and the sound of the detonation picked up on a suitably placed microphone.

The oscillator, trigger and gating circuits are perfectly conventional. A tuned R.C. oscillator is used as frequency standard and, with a very high degree of negative feedback, the frequency stability is better than the 1/1200 required, provided that the temperature range in which the instrument is used is not excessive. A frequency of oscillation clear of mains harmonics was selected to avoid possible pulling. The trigger circuits employ GT1/C thyratrons and the gating circuit two "Carpenter" high-speed polarised relays. The latter were found to have an operating time shorter than the permissible error,

* Imperial Chemical Industries, Limited, Nobel Division, Research Department, Stevenston, Ayrshire.

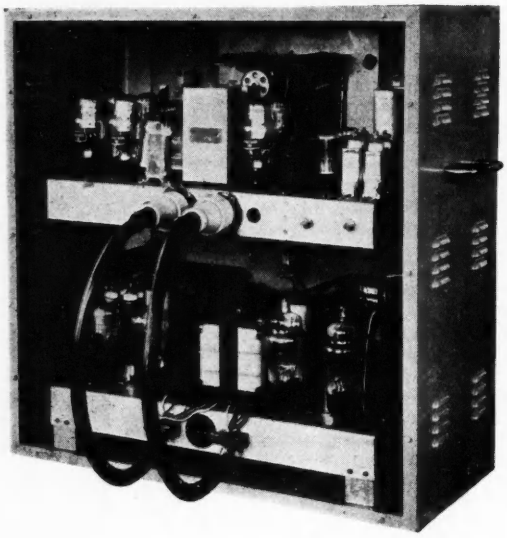

Fig. 1. Rear view of the Electronic Stopclock

Fig. 2. (Below) Principle of the motor drive

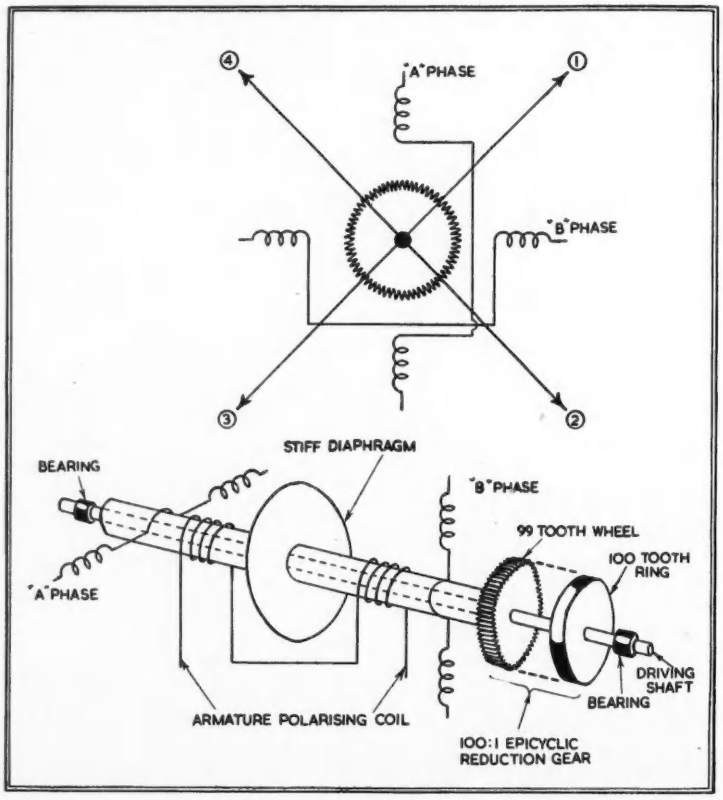

and the scatter of their operating times was exceedingly small.

The interesting part of the apparatus is the actual counting arrangement. The Scophony motor† is shown schematically in Fig. 2. Although intended as a split phase A.C. motor, the method by which it is used here is somewhat different. The two fields are normally D.C. energised, thus the armature is locked into a position mid-way between two poles. If the fields are now commutated in turn, the armature will move discontinuously between four fixed positions, thus producing discontinuous rotation of the shaft at a rate of 1 rev. for each 400 commutations. As explained in the article referred to above, the tooth cut of the reduction gear is small, enabling a large arc of contact, and thus quite high torque can be transmitted. The small tooth size also means that the actual motion of the armature is small, with the result that the movement from one locked position to another can be executed very quickly. This method of operation prevents any overshoot after the final count since the D.C. polarisation of the field locks the armature into its final position. Using the circuit of Fig. 3, the motor will respond to pulses fed in at a rate of up to about 1,200 per second, and this can be slightly increased for short periods if the standing currents in the windings of the motor are increased.

† *Electronic Engineering*, Oct. 1946, p. 308.

The operation of Fig. 3 is straightforward. V_1 is an Eccles-Jordan D.C. coupled trigger circuit, triggered between stable states by negative pulses. This produces positive pulses alternately at each pair of inverter grids. (The negative pulses between the positive ones are not effective). Each positive pulse produces the commutation of the appropriate inverter and thus the arrangement shown commutates the two motor fields alternately.

This arrangement was originally used to drive the "clock." The standard frequency input was fed to V_1 as a gated sine wave in parallel with R_1, thus giving one positive pulse to each inverter each cycle. A difficulty arose in this method, namely that it was necessary to start with the trigger circuit and the two inverters in pre-determined relative positions, otherwise the sense of rotation of the motor was indeterminate. This was readily accomplished, but it was found that occasionally electrical interference might trigger one of the inverters prior to the arrival of the appropriate signal, in which case the signal, when it did arrive, would operate the inverter in the wrong direction, putting the relationship of the trigger circuit and the inverters in error. This would reverse the direction of rotation of the motor.

To overcome this difficulty, the arrangement shown in the final circuit diagram was adopted (*see* Fig. 4(a)). In this case each thyratron was fed separately with a sinusoidal signal, obtained from the two phase-shifting networks in the secondary of transformer T_1. Thus the four thyratrons must always fire in a predetermined order and any stray strikes will be automatically compensated for.

This arrangement needs half the oscillator frequency of the arrangement of Fig. 3 to give the same rate of motor rotation, since each inverter must fire in both directions in each cycle—thus the motor registers 4 counts per cycle. Using this arrangement as a timer and neglecting any possible gating error, there is a possibility of the time being in error by 3 counts, *i.e.*, 1 count for the random phase of the oscillator, and an additional 2 counts for the following reason: Since two thyratrons must fire directly the gate switches on, the armature will move from "free" to a fixed position, depending on which two thyratrons strike. This new position may be up to either ±2 positions different from its previous stopped position, and the reduction

Fig. 3. Original clock-driving circuit

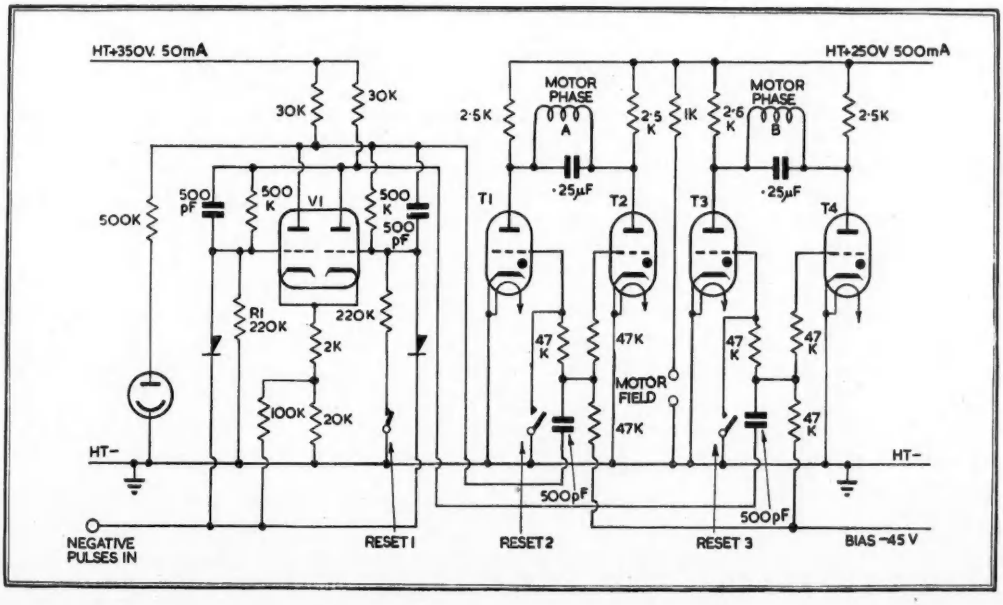

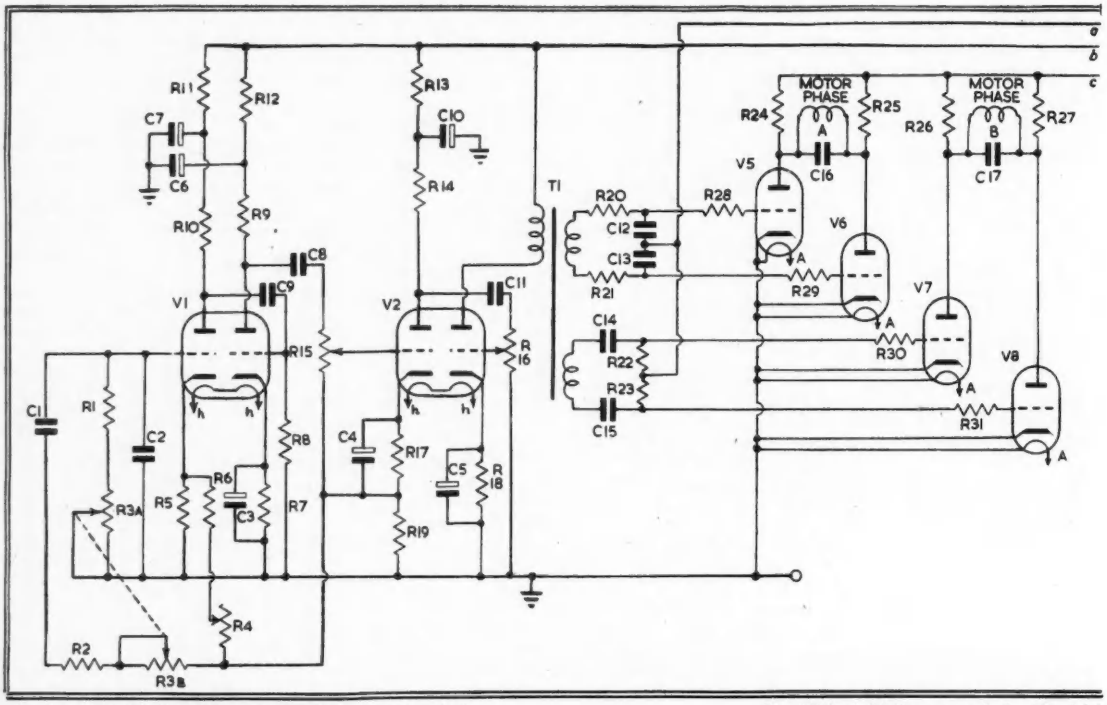

Fig. 4 (Above) (a) Final schematic of Electronic Stopclock

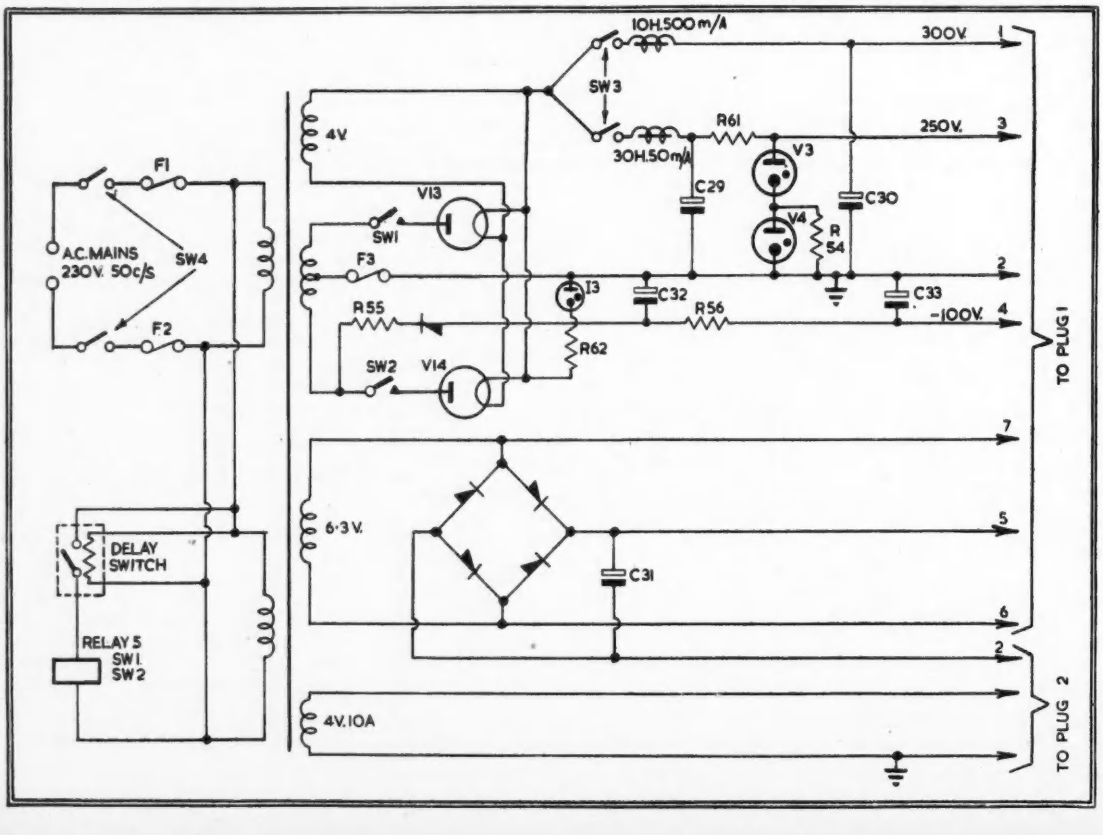

Fig. 4(Below) (b) Power supply for Fig. 4 (a)

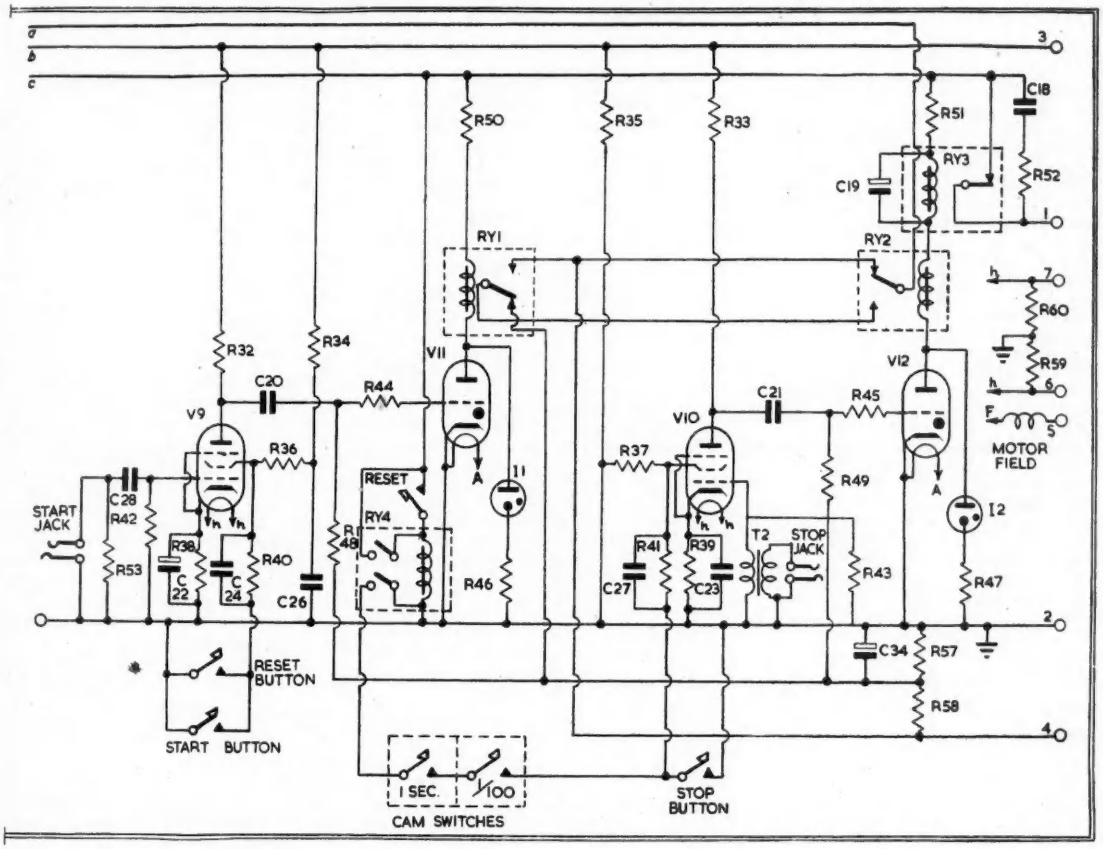

gearing may be "instantaneously" moved by a corresponding amount. In one hundred trials no reading was found in error by more than ±2 counts, but allowance was made for the possibility of greater positional errors by increasing the oscillator frequency so that a 3 count error was less than the specified error of the apparatus.

In the form illustrated the motor drives the hands through a 100-54 reduction, corresponding to an oscillator frequency of 185.2 c/s. and a counting rate of 741 counts/second. This speed is well within the instrument's capabilities and it delivers adequate torque to operate the two sets of reduction gearing for the hands.

Cam switches are provided for the zero adjustment of the instrument. This is done by re-starting the clock and operating the stop trigger circuit by means of the cam switches. To simplify the operation of the instrument, resetting of the trigger circuits is automatic. The stop thyratron operates an auxiliary relay which, when energised, interrupts the H.T. supply to all thyratrons.

The power supply is conventional, except that very good regulation is required since the quiescent H.T. current is about 30 mA, but the full load H.T. is about 200 mA.

The complete circuit details are shown in Figs. 4(a) and (b).

The apparatus has created interest as a possible adjunct to conventional electronic scaling apparatus on account of its high speed and robustness. Its speed of better than 1,200 counts/second had been exceeded by refined mechanical escapement counters, but the combination of speed and robustness is believed to be better than the majority of mechanical high-speed counters. Used directly as a counter it has a number of disadvantages, but these should not be difficult to overcome if it were needed as a unit-reading high-speed scaler. The chief disadvantage is the large numbers of counts per rev., *viz.*, 400, and since the torque falls with speed, it is not advisable to use speed-increasing gearing. A 6 in. dial can be read accurately, but not comfortably, to one count with a fine pointer. Any scale would have to be individually plotted since the increments are not exactly uniform, alternate increments being approximately equal in size. On the other hand, it is very robust and delivers very high torque compared with most counters, making it possible to use conventional gearing for subsidiary scales.

At the time of writing the prototype of the instrument described has done 16 months' routine testing, corresponding to several million counts and on recent inspection appeared to be in perfect order.

NOTES FROM THE INDUSTRY

B.B.C. Television Masts

Further details are now available concerning the Television Masts at Sutton Coldfield and Wrotham, to be erected by Messrs. B. I. Callender's Cables, Ltd.

The Sutton Coldfield mast for the new Midlands Transmitter will have a total weight of 140 tons and the pivoted base pedestal is designed to permit angular movement in any direction and to withstand a maximum working thrust of 350 tons.

At an elevation of 710 feet is a short square tower carrying the eight dipoles forming the television aerial, which, with its obstruction light and lightning conductor extends the mast height to 750 feet.

A two man electric lift will ascend to the top of the mast with landings at intermediate levels. The difficulties inherent in a normal push button control system due to long hanging cables are eliminated by an unusual method. The car is controlled from ground level and communication will be maintained by a VHF "Walkie Talkie" system.

A second mast 500 feet in height but of similar design to the Sutton Coldfield mast is to be erected at Wrotham, near Maidstone, Kent.

This mast will form part of an experimental VHF Broadcasting station from which high power tests on different system of modulation will be carried out.

Messrs. Marconi's Wireless Telegraph Co., Ltd., are associated with B. I. Callender's for the supply and installation of the television aerial and feeders on the Sutton Coldfield mast, and the feeders on the Wrotham mast.

Edinburgh Exhibition

The Edison Swan Electric Company, Ltd., are holding an exhibition of electro-medical apparatus, including the Ediswan Electronic Wave Analyser and the Electro-Encephalograph, in the Lecture Hall on the premises of the South East Scotland Electricity Board Electricity Showrooms, 127 George Street, Edinburgh 2, from May 17 to May 20 inclusive.

Admission will be by invitation, and those wishing to attend may obtain tickets on application to the company at 155 Charing Cross Road, London, W.C.2.

Taylor Electrical Instruments, Ltd.

An alternative to the model 30A oscillograph is available upon special request, incorporating a cathode ray tube with a blue trace, having a yellow-green after-glow.

The list price of this instrument is £33 10s. and delivery can be effected in approximately three weeks from receipt of instructions.

Staff Changes

The Dubilier Condenser Company (1925), Ltd., announce with regret that Mr. G. F. Mansbridge, O.B.E., M.I.E.E., has decided to retire from the board as at March 31, 1949. Mr. Mansbridge has been connected with the condenser industry for 50 years and his first condenser patent was applied for in 1899.

Mr. E. C. Deering, B.Sc., A.R.I.C., has been appointed a joint managing director of Johnson, Matthey and Co., Ltd., to take effect from April 1, 1949.

He joined the company in June 1918 as a member of the analytical laboratory where he stayed for some two years until transferring to the newly formed research department at the beginning of 1921.

National Physical Laboratory

The National Physical Laboratory at Teddington is holding an "Open Day" on Thursday, May 26, from 2.30-6 p.m., to which representatives of industrial organisations are being invited.

This is an opportunity for members of industry to see the wide range of scientific research and investigational work undertaken at the Laboratory and a number of tickets is being reserved for postal applications.

Accredited representatives of industrial organisations who would like to visit the Laboratory and who are not already in contact with its work are invited to apply to the Director, National Physical Laboratory, Teddington, Middlesex, not later than May 14.

Change of Address

The address of the Sheffield office of Wild-Barfield Electric Furnaces, Ltd., and the Sheffield office of their associates, Messrs. G. W. B. Electric Furnaces, Ltd., is now 4 Paradise Square, Sheffield 1: the telephone number remains unaltered as Sheffield 22776.

Travelling Exhibition in Electrical Research

The Caroline Haslett Trust of 35 Grosvenor Place, London, S.W.1, are now inviting applications for a Travelling Exhibition in the early autumn, tenable in Holland.

The successful applicant, who must possess the Diploma in Electrical Housecraft awarded by the Electrical Association for Women, will travel in Holland for one or two months to study Home Economics, particularly in the application of electricity to housecraft, and will acquaint herself with the publicity methods adopted there. She will visit works where domestic electrical equipment is manufactured and will hope to see, both in the home and out of it, the latest electrical developments.

Publications Received

"Some Electrical Instruments of Precision."
Leaflet on their products issued by:
Doran Instrument Co., Ltd.,
Wallbridge Works,
Stroud, Glos.

"Eddystone" Leaflets.
A series on their "640," "659" and "680" communication receivers, and other products available from:
Stratton and Co., Ltd.,
Eddystone Works,
Birmingham, 31.

"High Vacuum Equipment."
A booklet dealing briefly with this range of equipment issued by:
W. Edwards and Co. (London), Ltd.,
Kangley Bridge Road,
Lower Sydenham,
London, S.E.26.

Siemens Electric Lamps.
List No. 972.
Tungsram Valves.
List No. 966.
Both available from:
Siemens Electric Lamps and Supplies, Ltd.,
38 and 39 Upper Thames St.,
London, E.C.4

Ardent Acoustic Laboratories.
Leaflets WP/12700, WP/14504, WP/14507, WP/14509, WP/14511 dealing respectively with their "Ship's Master Communicator," intercommunication system, "Philomel" reproducer, general price list and public address equipment for police.
The Automatic Coil Winder and Electrical Equipment Co., Ltd.,
Winder House,
Douglas Street,
London, S.W.1.
Clydesdale Supply Co., Ltd.,
2 Bridge Street,
Glasgow, C.5.

Telcon Cables for Radio Frequencies—Publication No. 10 reprinted with additions. *The Telegraph Construction and Maintenance Co., Ltd., 22 Old Broad Street, London, E.C.2.*

Government Department Electrical Specification. The Committee on the Standardisation of Electrical Cables and Wires for Government Services (Secretary's address: Ministry of Supply, I.E.M.E., "Walsingham," Chislehurst, Kent) has recently issued two new specifications. These are G.D.E.S. No. 25 for "Tough Natural Rubber and Polychloroprens Compounds for Heating Electric Cables and Flexible Cords" and G.D.E.S. No. 26 for "Low Voltage Starter, Lighting and General Purposes Cables for Automobiles." Both are obtainable from H.M.S.O. the former price 1. and the latter price 2d.

CORRESPONDENCE

High Dielectric Ceramics

DEAR SIR,—In connexion with Mr. Lorant's note on ceramic materials of high dielectric permittivity (ELECTRONIC ENGINEERING, December, 1948, p. 403), the following comment may be of interest with regard to his reference to dielectric losses in mixed titanate compositions.

The loss tangents for capacitors with barium titanate as the dielectric are of the order of 0.01 to 0.02 at temperatures up to the Curie point, in the region of 120° C., beyond which they fall rapidly to relatively low values. The admixture to barium titanate of certain compounds such as strontium or lead titanate, possessing crystal structures of a similar type (*i.e.*, the "perovskite structure"), results in the displacement of the Curie point, and hence of the tan δ-temperature curve. By the addition of compounds possessing a Curie point below that of barium titanate, solid solutions may be obtained, the low-loss region of which extends to the working temperature range of the capacitor, and it is therefore apparent that the dielectric losses depend not only on the relative proportion of the additives, but also on the individual Curie temperatures of the latter.—Yours faithfully,

GEORGE V. PLANER.

Calculation of Parallel Resistances

DEAR SIR,—The following is often an improvement on Mr. F. Oakes' method of calculation of parallel resistances by slide rule (ELECTRONIC ENGINEERING, January, 1949, p. 20).

(1) Set cursor on highest resistance R_1.

(2) Set sliding scale unity on R_2.

(3) Cursor reading gives R_1/R_2.

(4) Move sliding scale till cursor reads $R_1/R_2 + 1$.

(5) Unity on sliding scale gives R_{12}.

If a further resistor R_3 is also in parallel

(6) Move cursor to R_3 (on final scale).

(7) Cursor reading gives R_3/R_{12}.

(8) Move sliding scale till cursor reads $R_3/R_{12} + 1$.

(9) Unity on sliding scale gives R_{123}.

This method is easier because the only mental arithmetic is to add one, but the decimal point must be watched. The proof is as follows:

$$R_{12}\frac{R_1}{R_1/R_2 + 1}$$

$$\therefore R_{12}\frac{R_1R_2}{R_1 + R_2} \text{ or } 1/R_{12}\ 1/R_1\ 1/R_2.$$

Yours faithfully,

E. G. WEBB.

Mr. Oakes Replies

Although the alternative method suggested by Mr. Webb may offer an occasional advantage by virtue of its simple addition of one, the extra sliding operation (and consequently reduced accuracy) as well as the incurring of potential mistakes in placing the decimal point render this method lengthier and less reliable generally.

Cathode-Ray Tubes with Post-Deflection Acceleration

DEAR SIR,—With reference to Mr. White's article on cathode-ray tubes with post-deflection acceleration in the March issue of ELECTRONIC ENGINEERING, it may be mentioned that the effects described can be demonstrated with an ordinary tube by the use of an external electrode.

I demonstrated the effect some years ago, using a Cossor oscilloscope. A narrow strip of copper foil was placed round the tube just behind the screen and was connected to the 700 V secondary of a transformer, the other end of which was earthed. The 100 V peak-to-peak mains waveform was then shown on the tube. On switching on the supply to the P.D.A. electrode the peak of the sinewave was brightened and the negative peak was blacked out. The distortion of the wave readily showed the reduction in sensitivity occurring.—Yours truly,

G. H. L. THOMAS.

Reducing the Effect of Capacitance in Screened Cables

DEAR SIR,—May we refer to the article in the March issue of your journal by your contributor, V. H. Attree, B.Sc. (Eng.)?

In this article we note that he refers to Coaxial Cables with an intersheath not being generally available, and we should esteem it a favour if you were to draw your readers' attention to the range of Telcon "Wye" Cables which have been in general production since the latter part of 1947.

In this range of cables the two screens can be supplied in continuous contact or separated by an intersheath.

A. W. J. CORDREY.

The Telegraph Construction and Maintenance Co., Ltd.,
Greenwich, S.E.10.

Mr. Attree Replies

The Telcon Wye type PT1 MYM would appear to be similar to the composite cable I described. Referring back to the article, it is interesting to note that if the outer screen is omitted altogether, the intersheath is relatively intensive to pick-up from stray fields: this is due to the low impedance at the cathode of the valve. Thus, in applications where the residual pick-up can be tolerated, it is possible to use an ordinary coaxial cable with the screening driven from the valve cathode. A low-capacity air-spaced cable, having a nominal capacity of 4.1 $\mu\mu$F/ft., enables an effective capacity as small as 0.3 $\mu\mu$F/ft. to be obtained. The remarkably low value of effective capacity may be appreciated from the fact that a 44-gauge bare wire, spaced 4 in. from an earthed chassis, has a capacity of 1.0 $\mu\mu$F/ft.

Electronic Equipment

A monthly record of British electronic apparatus, components and accessories, compiled from information supplied by the manufacturers.

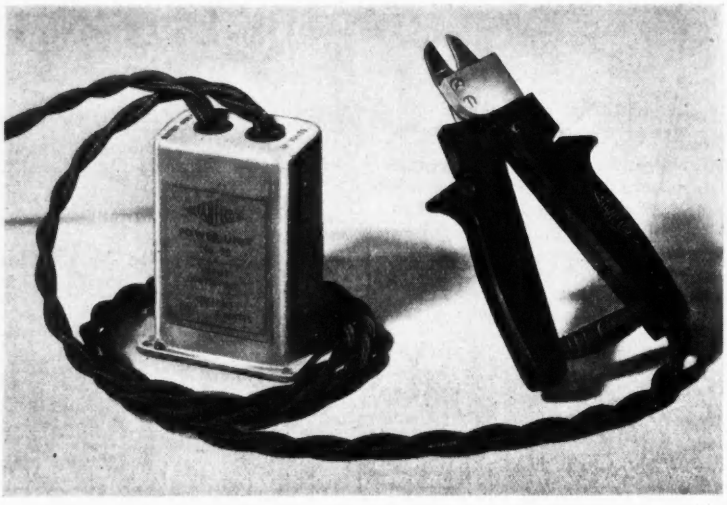

Potentiometers

(Illustrated below)

EGEN ELECTRIC LTD., of Canvey Island, Essex, announce that the following standard products with a 2¼ in. spindle are immediately available:—

(*a*) Log Type "A" (10 per cent resistance at 50 per cent effective rotation).
(*b*) Log Type "B" (20 per cent resistance at 50 per cent effective rotation).
(*c*) Linear Law.
(*d*) Anti-Log Type.

These are stocked with a single-pole or double-pole switch and without switch. Switches only can be supplied separately if required.

Features of the Egen carbon potentiometer are: Smooth action movement, positive location tags, rigid fixing to chassis, rustproof plating of all steel parts, silent operation and mains switch design with quick make-and-break action and self-cleaning contacts.

Retail prices quoted by the Company for potentiometers of 1,000 ohms to 5 megohms resistance are:—

Potentiometer only	2s.	9d.
Potentiometer with S.P. switch	4s.	6d.
Potentiometer with D.P. switch	5s.	3d.

Egen Electric Ltd.
Craven Avenue, Canvey Island, Essex

Audio Signal Generator

(See below, right)

A NEW audio signal generator, suitable for checking the frequency response of audio amplifiers, modulators and radio receivers, is announced by Pennine Amplifiers.

It possesses frequency coverage in two ranges—40 c/s.-1,000 c/s. on range 1, and 900-16,000 c/s on range 2—these being indicated clearly on the 4-in. diameter scale on the front panel.

Output sockets are provided on the front panel for low and high output impedances of 2.5 ohms and 3,000 ohms, with a maximum output of 3 watts.

Output voltage control scale on front panel is calibrated in output volts 0—2 and 0—100. The output voltage being held within plus or minus 10 per cent over entire range.

The instrument itself is enclosed in a blue-grey crackle finish case, with a smart and legible calibrated front panel, the size being 7 in. by 5½ in. and 4 in. deep, and the approximate weight 6½ lb.

Pennine Amplifiers,
Southgate, Elland, Yorkshire.

Electrically Heated Hand Pliers

(Photo above)

LATEST addition to the range of "Stanelco" tools marketed by Standard Telephones and Cables Limited (Industrial Supplies Division), the new P.V.C. stripper pliers are specially designed to remove the insulation from plastic-covered wires without damage to the conductor.

The jaws of the pliers are heated by a low-voltage current, which ensures perfect safety to the operator, and power consumption is negligible (over 100 hours' operation on one unit of electricity).

"Stanelco" stripper pliers will remove the plastic insulation from any conductor, stranded or solid, up to ⅛ in. diameter, faster than any other method. No switching is necessary and the pliers can be left connected without risk of damage or overheating.

Supply voltage: A.C. only, 200/250 volts, 50 c/s.

Working voltage: 12 volts.

Power consumption: Under 10 watts.

Standard Telephones and Cables, Ltd.,
Connaught House, Aldwych,
London, W.C.2.

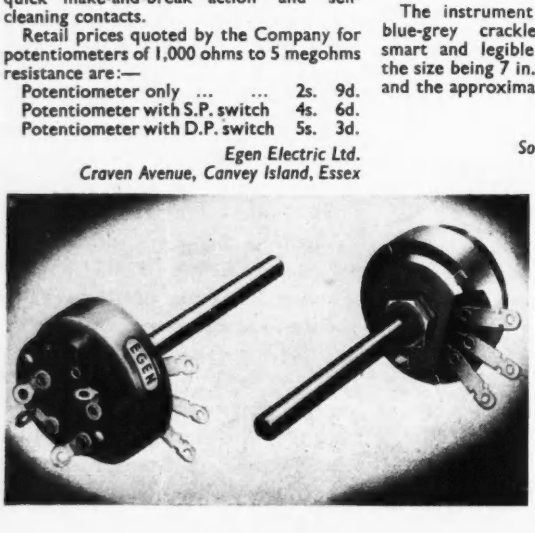

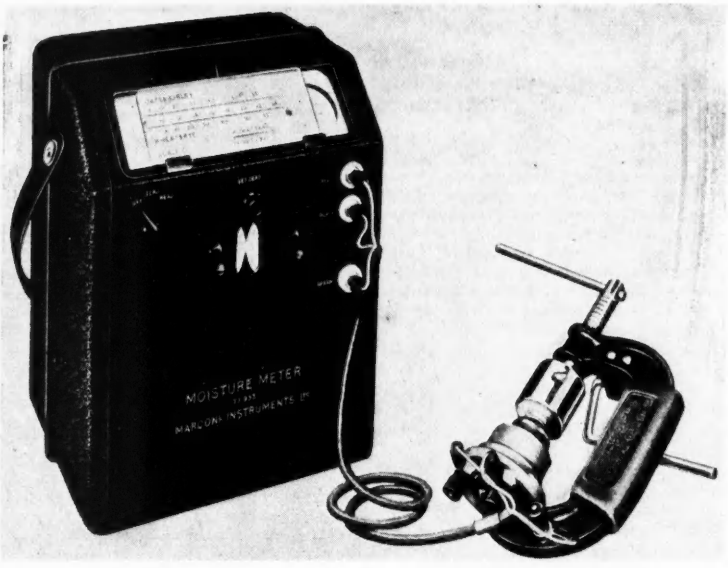

Marconi Moisture Meter

(Illustrated above)

THE National Institute of Agricultural Engineering has now issued its report on the first instrument of its kind to be submitted for test : the new Marconi Moisture Meter TF933. The Institute supports the manufacturer's claim of an absolute accuracy of ± 1 per cent moisture content—equivalent to an *error of prediction* of about 0.4 per cent m.c. In the words of the report No. CNR48071 : " The results of the tests show that the meter is a practical piece of apparatus for agricultural use with wheat and barley . . . and support the manufacturer's claim of an accuracy of ± 1 per cent in the range 10-20 per cent moisture content."

In design, the moisture meter employs a D.C. resistance-bridge circuit with electronic null-detector which makes reading independent of valve characteristics and supply voltages. In conjunction with its compression cell the instrument has advantages over the typical capacitance method of moisture determination in both reduction of packing and other errors and improved behaviour on freshly damped grain.

Another advantage of the instrument is its ability to test a wide range of materials using only a single scale corrected for temperature variations. Measurement range is 8 per cent to 25 per cent and readings are reproducible to within 0.2 per cent. The deviation from gravimetric methods is generally within 0.5 per cent in the case of stable, conditioned samples, while unstable, freshly gathered grain may cause deviations of ± 1 per cent within the normal moisture range.

Marconi Instruments Ltd., St. Albans, Herts.

Revolution Speed Indicator

DETAILS of a new system of recording the revs. per minute of the engines of motor cars and motor lorries, etc., are available from Runbaken Electrical Products, Ltd.

Previously, due to mechanical difficulties, revolution counting has been impossible unless a special drive has been built into the engine.

The new tachometer operates from the electrical impulses of the ignition system and the readings are proportionate to the number received per second, irrespective of voltage.

The same principle can also be used as a speedometer when the vehicle is operating in top gear, and has advantages over the mechanical type as there are no wearing parts.

Runbaken Electrical Products, Manchester, 1.

The Test Oscilloscope Monitor Type M.200

THIS provides facilities not given by the usual laboratory oscilloscope and has the advantage of being rack panel mounted uniform with the remainder of the equipment. Technical features are as follows—*Amplifier :* Gain controlled by switch on front panel to give fixed gains of x2 or x4. Frequency response within 1.5db up to 3 Mc/s. *Time Base :* May be triggered from + 10 volts or — 20 volts pulse with sweep speeds continuously variable from 15 micro-seconds up to 10 milli-seconds by means of five range switch and fine control. *Dimensions :* 19 in. by 8¾ in. by 14 in. deep. Weight 57 lb.

Dynatron Radio Ltd., Maidenhead, Berks.

Electronic Tube for the Measurement of Acceleration

(See below)

THE accurate measurement and recording of acceleration by electronic methods is made possible by the DDR100 Accelerometer Tube recently announced by Mullard Electronic Products Ltd. This device is basically similar in construction to an all-glass valve of the loctal type, and has the advantage that it may be mounted in any position. This feature, coupled with the high output and excellent response of the tube at low and zero frequencies, enables it to be used with great advantage as a low mass pick-up for measuring and recording the acceleration and vibration of high velocity elements. One of the chief advantages resulting from the high output of the tube is that it makes possible the observation and recording of acceleration without the necessity of using a special high gain amplifier. It may also be used quite successfully for displacement velocity measurement and recording.

The DDR100 Accelerometer is a double diode with anodes elastically supported so that the anode impedance is varied when the tube is subjected to acceleration. In practice, the tube is rigidly clamped to the structure under test and the measurement is expressed in terms of a current change in a Wheatstone bridge circuit, of which the anode/cathode impedance of the accelerometer tube forms adjacent arms.

The resonant frequency of the tube is 1 kc/s and the maximum acceleration range is 100 g. The tube is designed for a heater voltage of 6.3 V and a maximum anode voltage of 10 V.

Mullard Electronic Products Ltd. Century House, Shaftesbury Avenue, London, W.C.2.

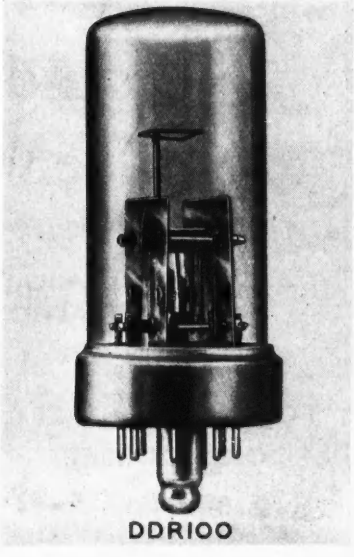

THESE ARE IN STOCK

THE RADIO AMATEUR'S HANDBOOK, by A. R. R. L. 1949. 15s.6d. Postage 9d.

PULSES AND TRANSIENTS IN COMMUNICATION CIRCUITS, by Colin Cherry. 32s. Postage 9d.

RADIO VALVE DATA, compiled by *Wireless World.* 3s. 6d. Postage 3d.

VADE MECUM, by P. H. Brans. 1948 edition. 19s. Postage 6d.

REFERENCE DATA FOR RADIO ENGINEERS, by W. L. McPherson. 5s Postage 5d.

PRINCIPLES AND PRACTICE OF RADAR, by H. E. Penrose. 42s. Postage 9d.

ELECTRONIC CIRCUITS AND TUBES, by Cruft's Electronic Staff. 45s. Postage 9d.

TELEVISION RECEIVER CONSTRUCTION—Ten Articles from *Wireless World.* 2s. 6d. Postage 2d.

STANDARD HANDBOOK FOR ELECTRICAL ENGINEERS, *8th edition.* 72s. Postage 1s.

ELEMENTS OF ACOUSTICAL ENGINEERING, by H. F. Olson. 42s. Postage 9d.

TELEVISION RECEIVING EQUIPMENT, by W. T. Cocking. 12s. 6d. Postage 4d.

COMPONENTS HANDBOOK, by J. F. Blackburn. 48s. Postage 9d.

We have the finest selection of British and American radio books. Complete list on application.

THE MODERN BOOK COMPANY
(Dept. E.5)
19-23, Praed Street, LONDON, W.2.

MELTON METALLURGICAL LABORATORIES LTD.

Liquid Silver

IMMEDIATE DELIVERY OF GRADES FOR METALLIZING

CERAMICS, MICA, GLASS & PLASTICS

All Enquiries to our NEW ADDRESS—

42, TOWNGATE STREET, POOLE, DORSET

Telephone No. Poole 1241

Industrial Electronics Reference Book

By Westinghouse Electric Corporation, 680 pp. 1260 Figs. First Edition 1948. (Chapman & Hall, Price 48s.).

NO less than 37 engineers of the Westinghouse Electric Co. have combined to produce this veritable *magnum opus* with the object as the preface states "of providing sufficient theoretical data and application information so that when an electronic device is designed and put into operation, its possibilities as well as its limitations can be appreciated."

Judged by the many original contributions made each of the 37 authors is an expert in his particular branch of the subject and all have wide interest and association with industrial electronics.

With such an array of talent, therefore, it is not surprising that so impressive and massive a book has been produced and it is easily one of the largest single books yet published. As such it is beyond the capabilities of a single reviewer to give constructive criticism of its contents, and indeed the present reviewer has none to offer.

In producing this book the authors have very wisely stressed the limitations of electronics as a tool in industry for it is all too obvious that in the past electronics has been applied in industry without a proper study of economic and other considerations.

They have carefully assessed the position and have made no sweeping claims, but accurately lay down the guiding fundamental principles of electronics in industry and the result is a reference book which will be the standard authority for some time to come.

Chapters 1 to 3 cover the fundamental and theoretical concepts of electron emission and control while Chapters 4 to 10 embrace the design, operation and constructional features of the different types of high vacuum valves, cathode ray tubes and photo-electric cells used in industrial electronics.

Chapters 11 to 14 deal with circuit components, and are followed by Chapters 15 to 18 on the design and operation of rectifiers, amplifiers, oscillators and control circuits. Transmission lines and aerial systems which are finding increasing application in industrial electronics are dealt with in Chapters 19 and 20.

No less than 14 more chapters are given over to the design and application of equipment, ranging from radio-frequency heating, electron microscopes and stroboscopes to precipitation equipment and electronic speed control of motors. Two valuable and informative chapters conclude the book on the care and maintenance of industrial electronic apparatus. Each chapter is complete with an extensive list of references.

H. G. FOSTER

BOOK

Klystrons and Microwave Triodes

By D. R. Hamilton, J. R. Knipp and J. B Kuper. 533 pp. (McGraw-Hill Book Co. 45s. net).

THIS book is No. 7 of the series of 28 volumes issued by the Radiation Laboratory of Massachusetts Institute of Technology which cover the work done in the United States on Radar and allied subjects. The authors have made many contributions in their particular field and in compiling this volume have had access to all the literature, a great deal of it in the form of reports hitherto unpublished, which has grown up during the war years both in the United States and in this country.

It is therefore a matter for regret that in these circumstances the authors have chosen to limit themselves, apart from one or two cursory references to English valves, to the development of klystrons and microwave triodes in the United States. The pioneering work of English laboratories on microwave triodes and on klystron oscillators which resulted in the first practical use of the reflex klystron in 1940 is not mentioned, nor is the theoretical work by groups in this country on the co-axial line type of tube and the reflexion oscillator, which played a considerable part in the development of the ideas set forth in the book. Apart from these omissions which inevitably detract from the value of the book as a record of the historic developments of the last nine years, the authors have endeavoured to make their account as complete as possible even when this involves some sacrifice in ease of reading.

The book is primarily a treatise on valve theory and design and contains no discussion of the problems of manufacture and of how these affect the evolution and ultimate realisation of the valve. It deals mainly with phenomena in the region above 3,000 Mc/sec., although of course the relations derived are applicable to lower frequencies.

It is divided into three parts, the first of which, after an introductory chapter and a chapter on the basic functions and types of microwave valves, treats of the basic phenomena of the interaction of electrons with high frequency fields and of the properties of circuits at high frequencies. Both subjects are treated mathematically with some generality so that the results are applicable to the theory

REVIEWS

of microwave triodes which is discussed in the second part of the book and also to the theory of klystrons which forms the third part.

The second part of the book deals in four chapters with planar space-charge valves of the lighthouse type; Chapter 4 is a valuable resume of the mathematical theory of this type of valve, while the remaining chapters of this section are devoted to a discussion of the properties of these valves when used as amplifiers, oscillators and as pulsed oscillators.

The third and largest section which occupies more than half of the book is devoted to a discussion of valves of the klystron type. After a consideration of the general theory of the klystron including space charge debunching and large signal operation, an excellent account is given of the klystron amplifier, and frequency multiplier. This contains much hitherto unpublished material and should be very valuable in drawing the attention of workers in this field to an aspect of the klystron which is likely to become increasingly important in the immediate future. In the last chapter the theory and operation of the reflex klystron is discussed in considerable detail; this type has been the most widely used of the klystrons during the war and in consequence a great deal of information is available most of which has been included by the authors.

It will be evident from the above remarks that the book is one for the specialist rather than for the general reader, and is likely to become a standard reference book for those engaged in the design of valves in this region. A few detailed omissions may be noted: for example, there is no reference to the theorem of Petrie which enables an average coupling coefficient to be readily calculated for any gap, or to the application of relaxation methods to the evaluation of resonator properties, or the calculation of bunching properties in non-homogeneous fields by numerical integration. Also no experimental method is described of determining that very important quantity, the shunt impedance of a resonator, although two such methods have been frequently used. On p. 505 appears the incorrect statement that "thermally tuned tubes stand shock and vibration about as well as the mechanically tuned types." Nevertheless the authors are to be congratulated on having accomplished a difficult task well.

L. F. Broadway

Microwave Duplexers

By L. D. Smullin and C. G. Montgomery, Pp. 437 + xiv. McGraw Hill Book Co. Inc., New York. Price 39s. in U.K.

THIS book is Vol. 14 of the M.I.T. Radiation Laboratory series on radar techniques and principles.

L. D. Smullin and C. G. Montgomery have been responsible for the editing of this volume. They have been joined by W. C. Caldwell, H. K. Farr, H. A. Leiter and C. W. Zabel in forming a group of six contributing authors, and each of the nine chapters in this book has been written by one or by two members of this group. In spite of this division of responsibility the editors have succeeded in producing a clear and unified treatment of the subject.

Chapter one is a short introduction by C. G. Montgomery. He outlines the main features of microwave radar and explains that the advantages to be gained by using a single antenna for both transmission and reception made the development of high speed switches a necessity. Most modern radar sets incorporate two types of switch. One of these, the TR cell, has the function of protecting the crystal mixer during the transmission of the pulse; the other, the ATR cell, disconnects the transmitter during reception in such a manner that practically all of the received power enters the receiver. In very high power sets a third cell, the pre-TR, is used in conjunction with the TR. The larger part of the book is concerned with the properties and development of these cells. It is appropriately pointed out in the introduction that the use of the term duplexer, as applied to pulsed radar equipment, is not strictly justified, since the transmitted and received pulses, in normal operation, are not simultaneous.

The book deals with developments in the microwave region over the range of 1,000 Mc/s. to 30,000 Mc/s. In particular, most of the development work has taken place in the S, X and K bands, and British readers who have been engaged in work in these bands during the war will find themselves on very familiar ground in spite of the fleeting references in the text to British developments in techniques and components.

Chapters two, three and four deal with the performance of TR, ATR and pre-TR cells at low power levels and equivalent circuits are developed for these devices. In chapter four there is a very good discussion of the theory and development of the bandpass TR. A useful feature of this chapter is the illustration of the use of the matrix method in estimating the loss due to the multiple iris structures used in the construction of broadband components. The data contained in these chapters lose some value for many British workers because of the unfortunate

LEWIS'S of Gower Street

invite inspection of their stock of books on all branches of

RADIO and ELECTRICAL ENGINEERING

CONTINENTAL and AMERICAN

Works can be obtained under Board of Trade Licence

Secondhand Department

140 Gower Street, W.C.1

A constantly changing large stock of scientific and technical literature on view.

Books sought for and reported free of charge

Large or small collections bought

LONDON: H. K. LEWIS & Co. Ltd.
136 GOWER STREET, W.C.1
Telephone: EUSton 4282
Established 1844

NEW BOOKS

CYBERNETICS
or
CONTROL & COMMUNICATION IN THE ANIMAL AND THE MACHINE

By NORBERT WEINER
Professor of Mathematics, Mass. Inst. of Technology.

9 × 6 194 pages 18s. net

Of interest to all electro-physiologists

MICROWAVES AND RADAR ELECTRONICS

By E. C. POLLARD
Assoc. Professor of Physics,
and J. M. STURTEVANT
Assoc. Professor of Chemistry.
(Both of Yale University).

Demy 8vo 426 pages illustrated 30s. net

CHAPMAN & HALL, LTD.
37-39, Essex Street, London, W.C.2.

BOOK REVIEWS *(continued)*

fact that, in the past, standard American and British waveguides have been made to slightly different dimensions.

Chapter five, the longest chapter in the book, deals with microwave gas discharges. Before the development of high power magnetrons the complex subject of gas discharges had been confined to fairly low frequencies. Now it has become possible to use high powers and high frequencies to extend our knowledge. But there is still comparatively little information about, or understanding of, the very high frequency gas discharge and such devices as the TR cell were developed empirically in the absence of a theory capable of providing useful design information. The discussion given in this chapter shows how far theory has yet to develop before a complete explanation can be given of the known properties of devices such as the TR cell, but the information available at the end of the war in regard to the microwave gas discharge is well summarised and clearly stated.

Chapter six gives further information on the experimental results on the high power performance of TR and ATR tubes and includes some information on construction techniques.

Chapters seven and eight deal with the microwave circuit arrangements used to connect the TR, ATR and pre-TR to other components in the R.F. portion of the radar set. These chapters will be of wider appeal than the earlier chapters because the waveguide and coaxial line arrangements discussed, such as branched and balanced circuits, find applications outside the field of radar. A knowledge of transmission line theory and of impedance diagrams is assumed and some use is made of matrix methods in discussing the T-junction and magic T.

The book ends with a chapter on measurement techniques with particular reference to the measurement of the properties of TR and ATR cells.

There are altogether 28 volumes in the M.I.T. Radiation Laboratory series, and some of these will appeal to a much wider circle of readers than the others. The present volume is for the specialist and will be of great value to those whose interest lies in the field of microwave radar. A good knowledge of the fundamentals of microwave techniques is assumed and this knowledge is provided by other volumes of the series. Those who are interested in communication techniques will find much valuable material in chapters seven and eight.

The binding and printing are excellent and the few errors noticed were trivial and not likely to confuse the reader.

T. J. BUCHANAN

Velocity-Modulated Thermionic Tubes

by A. H. W. Beck, Cambridge University Press, 180 pages, price 15s.

THE reviewer feels some doubt of the accuracy of Mr. Beck's second sentence to the effect that "a thermionic generator or amplifier is usually conceived as an . . . enclosure with a number of terminals, 2 or 4 which have significance in the performance of the system considered as an active network." However, there is no doubt that Mr. Beck himself is in no way confined to this somewhat arid conception.

The main part of the book is devoted to a detailed analysis of the theory of V-M and its application to practical tubes. Many may find the concentration of mathematics rather formidable but it is difficult to see how the author could have avoided this in the space available without leaving serious logical gaps in the analysis and he has taken very commendable care to see that the general argument and the significance of the results are quite clear to those who may prefer to skip the larger formations of symbols.

Very large modifications of the results given by elementary theory are found when the finite dimensions of the gaps and the limitations imposed by electron optical requirements are considered. The conflicts between the various desiderata and the ways in which the best compromise may be determined are well brought out. As would be expected by those who know of the author's war-time work, the sections on heavy-current beams and on high-power tubes are particularly good.

Of outstanding merit, in the reviewer's opinion, is the final chapter, on design and manufacture. This could be read with pleasure and profit by those interested in the design of almost any electronic device. It is impossible to resist quoting the description of patent literature on oxide cathodes as "like an alchemist's notebook." There are few authors who can deal so happily with theory and practice.

Among the few errors may be mentioned a misprint at the top of page 18—the transit time between gaps in the Heil tube is $n + \frac{1}{4}$ periods—the omission of plane "A" in Fig. 4.1 and the statement (page 133) that the maximum conversion efficiency of the plane monotron is about $2\frac{1}{2}$ per cent at 2.3 radians transit-time.

A larger peak of about 17 per cent occurs near $7\frac{1}{2}$ radians. This requires a radio-frequency amplitude of several times the applied D.C. voltage and hence, although it does not lead to electron reflection, as in the case given by Müller and Rostas, owing to the large transit angle, the losses are too high to allow the construction of a useful tube.

There is no question that this is an excellent book for anyone seriously interested in any of the many applications of velocity-modulation. It easily maintains the high standard set by other members of the series on Modern Radio Technique, edited by Mr. J. A. Ratcliffe.

J. H. FREMLIN

Micromeritics

by J. M. Dallavalle (Pitman and Sons, Ltd.) 2nd edition. Price 42s. 6d.

THE word micromeritics has been proposed to cover the technology of small particles ranging from 10^{-5} to 1 cm. These are larger than the usual colloidal particles, and they constitute so many systems to be found in technological practice that this realm is steadily developing into a separate science. Mr. Dallavalle deals with the physical properties of such systems and gives a useful treatment of the varied instances in which they are to be found.

The author has enlarged the work in its second edition by some 130 pages, and has made very extensive and critical revisions.

Particle technology involves the determination of the particle size, shape, surface-area and volume as well as the state of packing and reaction to pressure. This leads to a study of the behaviour of particulate matter to heat, electric fields, optical and sonic effects, chemical reaction and absorption phenomena.

The practical consequences of these effects is shown up in a wide variety of processes: e.g., grinding operations, filtration, sedimentation, transport of particles by flow. Industrial dust clouds and powder mixtures are successfully treated by electrical, electrostatic conductance, and pyroelectric precipitation. The spontaneous combustion of dust particles in the atmosphere of flour mills and the like is an ever-present fire and explosion hazard.

All such processes are demanding control, and it is here that the electronic engineer can make useful contributions. Improvements in the electron microscope which permit of *direct* measurements of particles, would be of especial value.

Some interesting observations are recorded in the section devoted to the electrification of dust particles in air, the electrical conductivity of pressed powders, and the magnetisation of finely divided magnetite.

The author has done a good service in bringing together the varied factors involved in a study of particular systems. The usefulness of the book could, however, be enhanced by a still more detailed index.

S. R. CARTER

MAY MEETINGS

The Inst. of Electrical Engineers

All meetings, unless otherwise specified, are held at the Institution of Electrical Engineers, Savoy Place, London, W.C.2.

Measurements Section

Date: May 3. Time: 5.30 p.m.

Lecture: "Some Electromagnetic Problems."

By: Professor G. W. O. Howe, D.Sc., LL.D.

Education Discussion Circle Meeting

Date: May 9. Time: 6 p.m.

Discussion: Graphical Methods in Teaching Electrical Engineering (including Radio).

Opened by: S. N. Ray, M.Sc., B.Sc.(Eng.)

Ordinary Meeting

Date: May 12. Time: 5.30 p.m.

Annual General Meeting.

The Secretary: The Institution of Electrical Engineers, Savoy Place, London, W.C.2.

Cambridge Radio Group

Date: May 10. Time: 6 p.m.

Held at: Cambridgeshire Technical College.

Lecture: "Magnetic Amplifiers."

By: A. G. Milnes, M.Sc.(Eng.).

Hon. Secretary: G. E. Middleton, M.A., University Engineering Laboratory, Cambridge.

North Midland Centre

Date: May 10. Time: 6.30 p.m.

Held at: Yorkshire Electricity Board Offices, 1 Whitehall Road, Leeds.

Annual General Meeting and Visit of President.

Hon. Secretary: H. S. Moody, The Yorkshire Electricity Board, Manor Farm, Bramhope, Leeds.

North-Western Centre

Date: May 3. Time: 6.15 p.m.

Held at: Engineer's Club, Albert Square, Manchester.

Annual General Meeting.

Hon. Secretary: A. L. Green, 244 Brantingham Road, Chorlton-cum-Hardy, Manchester, 21.

Northern Ireland Centre

Date: May 24. Time: 6.45 p.m.

Held at: Queen's University, Belfast.

Annual General Meeting.

Hon. Secretary: J. K. Carrothers, 2 Abbeydale Park, Ballysillan, Belfast.

South Midland Centre

Date: May 2. Time: 6 p.m.

Held at: James Watt Memorial Institute, Great Charles Street, Birmingham.

Lecture: "Semi-Conductors and Rectifiers."

By: Professor N. F. Mott, M.A., F.R.S.

Hon. Secretary: H. Hooper, British Electricity Authority, 53 Wake Green Road, Moseley, Birmingham, 13.

Southern Centre

Date: May 4. Time: 6.30 p.m.

Held at: City Council Chambers, Clarence Parade, Portsmouth.

Annual General Meeting.

Lecture: "Overhead Line Regulations."

By: H. W. Grimmit.

Hon. Secretary: W. M. Read, The Oaks, Ashurst, Southampton.

Irish Branch

Date: May 19. Time: 6 p.m.

Held at: Trinity College, Dublin.

Annual General Meeting.

Hon. Secretary: R. N. Eaton, 42 Jame's Street, Dublin.

The Institution of Electronics

Date: May 18. Time: 7 p.m.

Held at: Chamber of Commerce, New Street, Birmingham.

Lecture: "Some Applications of Electronics."

By: Professor T. Sayer, M.Sc., Ph.D.

Hon. Secretary: A. A. Barber, "Newlyn," Fiery Hill Road, Barnt Green, Worcestershire.

North West Section

Date: May 26. Time: 6.30 p.m.

Held at: Reynolds Hall, College of Technology, Manchester.

Lecture: "Radio Astronomy."

By: Dr. A. C. B. Lovell, O.B.E.

The Secretary: L. F. Berry, 105 Birch Avenue, Chadderton, Lancs.

Institution of Post Office Engineers

Date: May 3. Time: 5 p.m.

Held at: Institution of Electrical Engineers, Savoy Place, Victoria Embankment, London, W.C.2.

Annual General Meeting.

Lecture: "The Scientific Work of the Post Office."

By: Dr. L. E. Ryall, Ph.D., B.Sc., M.I.E.E.

Local Secretary: W. H. Fox, A.M.I.E.E., Engineer-in-Chief's Office (T.P. Branch), Alder House, London, E.C.1.

British Institution of Radio Engineers

Merseyside Section

Date: May 4. Time: 7 p.m.

Held at: The Incorporated Accountants Hall, Derby Square, Liverpool, 2.

Lecture: "The Measurement of F.M. Transmitter Performance."

By: D. R. Willis.

Secretary: J. Gledhill, B.Sc., 123 Portelet Road, Liverpool, 13.

North Western Section

Date: May 5. Time: 6.45 p.m.

Held at: College of Technology, Sackville Street, Manchester 1.

Lecture: "Ceramic Capacitors."

By: W. G. Roberts, B.Sc.(Eng.).

Secretary: G. T. Y. Stennett, 123 Parrswood Road South, East Didsbury, Manchester, 20.

North Eastern Section

Date: May 11. Time: 6 p.m.

Held at: Neville Hall, Westgate Road, Newcastle-on-Tyne.

Annual General Meeting.

Chairman: A. S. Dunstan, 26 Denewell Avenue, High Heaton, Newcastle-on-Tyne.

The Television Society

Main Society and Programme Group

Date: May 5. Time: 7 p.m.

Held at: C.E.A., 164 Shaftesbury Avenue, London, W.C.2.

General Discussion on Television Programmes, with Cecil McGivern, Director of Television Programmes at Alexandra Palace.

Constructors Group

Date: May 12. Time: 7 p.m.

Held at: C.E.A., 164 Shaftesbury Avenue, London, W.C.2.

Lecture: "Some Devices for Reducing the Effects of Interference and Fading on Television Pictures."

By: D. McMullan, B.A.

ABSTRACTS OF ELECTRONIC LITERATURE

An Instrument for the Measurement and Time Integration of Small Voltages and Currents)

(I. A. D. Lewis, A. C. Clark)

The instrument described may be used for the simultaneous measurement and time integration of potentials varying between 0 and 0.5 V with an accuracy of 3 per cent. The instrument has a high input impedance and can be used for measurement of currents down to 0.01 μA full-scale deflection. Currents are read on a microammeter and time integration results are obtained as counts on a standard Post Office call register. A detailed analysis of the Miller type of integrating circuit has shown that, when a larger value of input potential (say 10 V) is available, an accuracy of within 0.2 per cent is expected over most of the range. This has been verified experimentally (Authors' abstract.)

Illustrated by one diagram, one graph, seven references.

—*J. Sci. Instrum.*, March, 1949, pp. 80-84.*

High Frequency Absorption Phenomena in Liquids and Solids

(W. Jackson, J. A. Saxton)

Extension of the electrical frequency spectrum beyond 10^{10} c/s opens up a new field of dielectric study. This paper discusses briefly the work on liquid and solid dielectric substances carried out during the war when the emphasis was on substances of technical importance, e.g., polythene, water and ice, and during the immediate post-war period when a fuller attempt was made to study the scientific significance of this data, and also to supplement it with measurements on simpler systems. This work has revealed the limitations of existing theories of dipolar absorption in liquids and solids and refers to the possibility of observing resonance absorption effects in solids in the microwave region. (From authors' abstract.)

Illustrated by six graphs, 17 references.

—*Proc. I.E.E.*, March, 1949, pp.77-80.*

A Method of Measuring Very High Speed Transient Currents

(A. M. Zarem, F. R. Marshall)

A deflection coil suitable for use in measuring very high speed transient currents is described. When used with a type 912 cathode-ray tube operated at a 15.000 volt accelerating potential, this coil provided a spot deflection of 1 in. at approximately 50 amperes of current. A mutual inductance device was constructed to extend the range of measurement of the deflection coil. The current under study is allowed to flow in one coil, and the other coil is connected to the deflection coil. Results are given of an analysis of the transient response of such a circuit, taking into account increased losses caused by the transient skin effect. Accurate design of a transformer and deflection coil system to meet specific requirements is facilitated by the analysis. (From authors' abstract.)

Illustrated by two photographs.

—*Rev. Sci. Instrum.*, February, 1949, pp. 133-134.*

A Storage System for Use with Binary Digital Computing Machines

(F. C. Williams, T. Kilburn)

The requirements for digital computing machines of large storage capacity have led to the development of a storage system in which the digits are represented by a charge pattern on the screen of a cathode-ray tube. Initial tests have been confined to commercial tubes. Short term memory of the order of 0.2 sec. is provided by the insulating properties of the screen material. Long term memory is obtained by regenerating the charge pattern at a frequency greater than 5 c/s. The regeneration makes accurate stabilisation of the position of the charge pattern on the c.r. tube unnecesssary. The properties required of a storage system and its operation, as part of a machine, are stated. (From authors' abstract.)

Illustrated by two photographs, 12 diagrams, 23 graphs, 11 references.

—*Proc. I.E.E.*, March, 1949, pp. 81-100.*

A Note on Analogue Computer Design

(J. A. Bronzo, H. G. Cohen)

A method is proposed for the simplification of computers designed to solve certain types of partial differential equations. The equations are those in which the spatial derivatives may be replaced by finite difference expressions. The resulting difference-differential equations are reformulated as a system of linear simultaneous equations by making use of La Place transforms, and matrix notation is introduced. By applying a similarity transformation to the matrix a new system is obtained which lends itself more readily to the construction of an analogue. As an example, the analogue of the equation of the vibrating string with fixed ends is discussed. (Authors' abstract.)

Illustrated by four references.

—*Rev. Sci. Instrum.*, February, 1949, pp. 101-102.*

Measurements of the Mechanical Properties of Polymer Solutions by Electromagnetic Transducers

(T. L. Smith, D. Ferry and F. W. Schremp)

A concentrated polymer solution is sheared by a rod oscillating axially with a very small amplitude in a closed tube. The rod is driven by a coil in a magnetic field; from electrical measurements on the coil, the mechanical resistance and reactance of the system are calculated by transducer relationships. Equations are given for obtaining the dynamic viscosity, η', and rigidity, G', of the solution. In the case of some polymer solutions, the audio frequency range covered by the present apparatus falls in the dispersion zone where η' and G', change rapidly with frequency. In the other cases the frequency range covered appears to be at the upper end of the dispersion zone; η' is far smaller than the viscosity in steady flow, and G' changes very little with frequency. (Authors' abstract.)

Illustrated by four diagrams, six graphs, one table, 20 references.

—*J. Appl. Phys.*, February, 1949, pp. 144-153.*

Exposure Meter for Precision Light Dosage

(H. F. Launer)

The exposure meter is an electronic device of the type in which a phototube charges a capacitor to the firing voltage of a trigger tube, whose pulse is amplified by a thyratron. The device has been adapted to high intensity sources and is used for the regulaton of carbon arc light dosage in the standardisation of light-sensitive paper at the National Bureau of Standards. Two instruments simultaneously viewing a gradually ageing monochromatic source gave count values whose ratios showed a coefficient of variation of 0.32 per cent in two weeks of continuous measurement. One instrument was tested for suitability of application by comparing counts with reflectance changes of light-sensitive paper under arc exposure. The instrument was later used to test the variability of the uranyl oxalate actinometer. (From author's abstract.)

Illustrated by one photograph, one diagram, four tables.

—*Rev. Sci. Instrum.*, February, 1949, pp.103-109.*

* Abstract supplied by courtesy of Metropolitan-Vickers Electrical Co. Ltd. Trafford Park, Manchester

Good Egg!

Here is a miniature potentiometer that handles a big job in a big way. The egg may seem irrelevant, but it does show the relative sizes of these instruments, and anyway we are pleased to say that supplies of this product are considerably easier to obtain than eggs.

The unit illustrated is the type CV2 potentiometer.

- Continuously variable wirewound
- Dissipation, 2 watts
- Resistance values, 25-5,000 ohms
- Single hole fixing
- Available alternatively for Preset or Knob control

Control by **PAINTON**

PAINTON & CO. LTD · KINGSTHORPE · NORTHAMPTON

MARCONI MADE THIS POSSIBLE...

Marconi light-weight portable television equipment made possible for the first time, the B.B.C.'s televising of the boat race from start to finish.

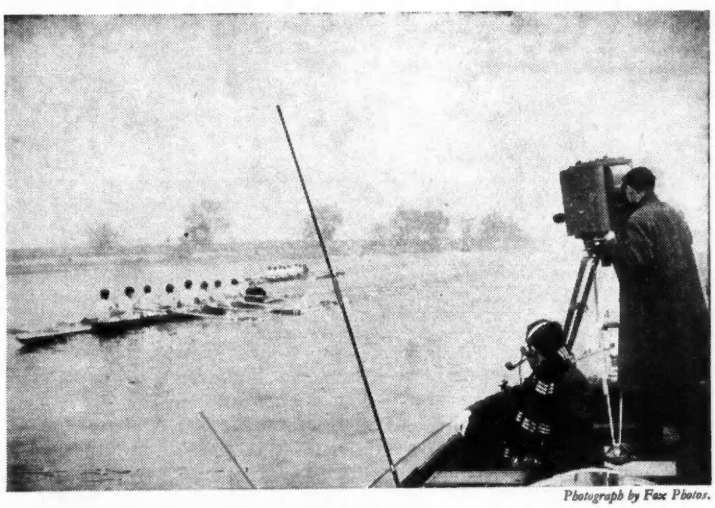

Photograph by Fox Photos.

Marconi—THE WORLD'S FINEST TELEVISION

MARCONI'S WIRELESS TELEGRAPH COMPANY LTD., MARCONI HOUSE, CHELMSFORD, ESSEX

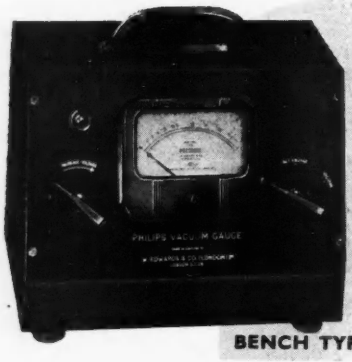

EDWARDS

Philips-Type Cold Cathode Ionisation Gauge

RANGE: 5×10^{-3} to 10^{-5} mm Hg.

BENCH TYPE, Model 3

The robust all-mains operated high vacuum gauges illustrated are sensitive, direct and continuously indicating instruments, having a range normally associated with the Thermionic Ionisation Gauge, but possessing characteristics which render it a valuable and useful alternative to the latter.

Other important advantages include :

- **General robustness of instrument and gauge head**
- **Ability to withstand accidental exposure to atmospheric pressure without permanent injury**
- **No hot filament to burn out**
- **No special outgassing treatment required**
- **No skilled adjustments required**
- **"Set Voltage" facility for greater accuracy**

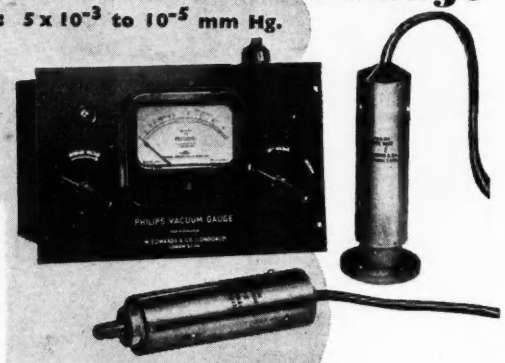

PANEL MOUNTING TYPE, Model 3

... For Better Vacuum Service ...

W. EDWARDS & CO. (London) LTD.
LOWER SYDENHAM, LONDON, S.E.26
Telephone : SYDenham 7026 (5 lines)
Telegram : EDCOHIVAC, Phone London

ELECTROMETER — VOLTMETER

BALDWIN

A sensitive **ELECTROMETER** with input resistance of 10^{16} ohms and input capacitance less than 1 pF.

A robust D.C. **VOLTMETER** with First-Grade Accuracy 0 — 50 — 100 — 500 V Wide electronic applications.

Measures electrostatic potentials : Very small currents : Very high resistances

This instrument is based on the Farmer Cathode-follower circuit and uses an electrometer valve.

BALDWIN INSTRUMENT CO. LTD., DARTFORD, KENT

Telephone : DARTFORD 2989

INEXPENSIVE

DIRECT READING

DECADE STABLE MICA CONDENSERS

50 μμF to 1.0 μF

(continuously variable)

DIRECT READING ACCURACY ...	0.5%
PERMANENCE	0.1%
MAY BE CERTIFIED TO	0.1%

In addition to the well-known Precision and Laboratory grades of Sullivan Decade Mica Condensers we have introduced a new **Inexpensive Series** especially designed for use in **Colleges** and for the more ordinary **Routine Testing** and **Industrial Research.**

Suitable for use at Low and High Frequencies

H. W. SULLIVAN

LIMITED

LONDON, S.E.15

Telephone - New Cross 3225 (P.B.X.)

Electrical Standards for Research and Industry

Testing and Measuring Apparatus FOR COMMUNICATION ENGINEERING

LOW TEMPERATURE COEFFICIENT
PROTECTION FROM THE EFFECTS OF HUMIDITY
SUITABLE FOR USE IN TROPICAL CLIMATES

AN ANNOUNCEMENT OF EXCEPTIONAL INTEREST....

The FOX HELICAL POTENTIOMETER type PXF 5/H 10 is now available for general release to the Electronic Industry

BRIEF SPECIFICATION

Resistance range, 20 ohms to 50 K. ohms.
Helical turns 10.
Rotation, 3,600°.
Number of wire turns, 2,000 to 12,000.
Wattage, 5.

Write for full details to :—

P. X. FOX LIMITED

TOROIDAL POTENTIOMETER SPECIALISTS

HORSFORTH, YORKSHIRE, ENGLAND.

Telephone : Horsforth 2831/2. - *Telegrams :* "Toroidal, Leeds."

n.d.h.

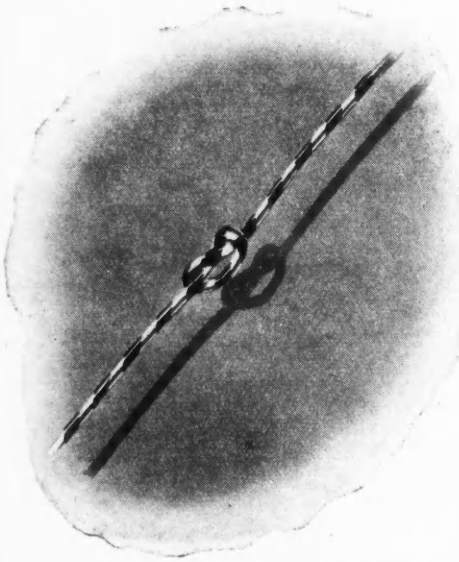

There is a reason for the knot

—is there not?

The knot serves firstly to remind you to write for details of Delaflex — the insulating sleeving that commends itself to so many leading set makers. Secondly, it is a good demonstration of the flexibility of Delaflex, which comes in various single and multiple colours and in diameters from 0.5 mm upwards.

Materials: Varnished Cotton, Varnished Art. Silk (Rayon) and Rolled Silk with optional metal screening.

* *May we send you full particulars?*

DELAFLEX
insulated sleevings

Thomas De La Rue & Co. Ltd., Plastics Division
Imperial House, 84-86 Regent Street, London, W.1
Telephone No: Regent 2901

IND/2/49

NILO ALLOYS FOR CONTROLLED EXPANSION

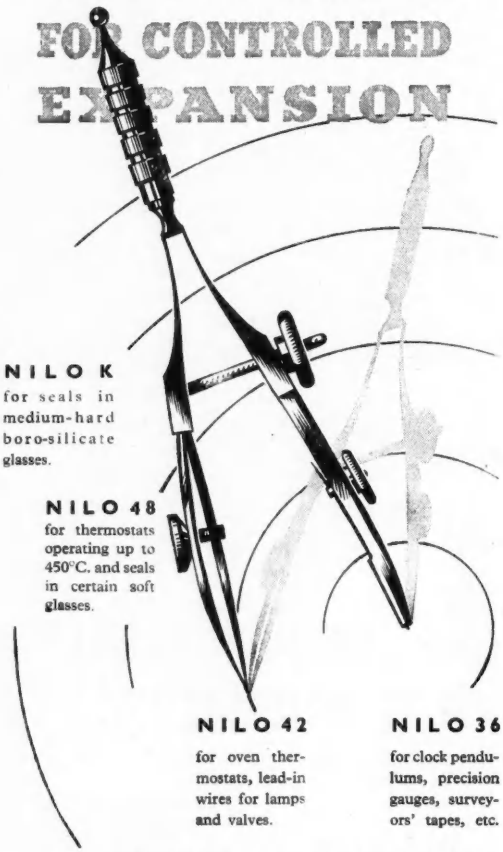

NILO K
for seals in medium-hard boro-silicate glasses.

NILO 48
for thermostats operating up to 450°C. and seals in certain soft glasses.

NILO 42
for oven thermostats, lead-in wires for lamps and valves.

NILO 36
for clock pendulums, precision gauges, surveyors' tapes, etc.

The Nilo alloys are nickel-iron and nickel-cobalt-iron alloys with small controlled coefficients of thermal expansion.
Nilo 36 has a coefficient of expansion approaching zero at atmospheric temperatures.
Nilo 42 has a slightly higher expansion, but it holds this figure at higher temperatures than Nilo 36.
Nilo 48 has a coefficient of thermal expansion similar to that of certain soft glasses, and may be used at temperatures up to about 450°C.
Nilo K has a coefficient of thermal expansion similar to that of medium-hard boro-silicate glasses. These glasses, having good thermal shock resistance, are widely used in the construction of electronic equipment.

**Nilo is a registered trade mark.*

For further particulars, write to . . .

HENRY WIGGIN & CO. LTD
WIGGIN STREET, BIRMINGHAM, 16

36/HA/1

Construction Materials

for THERMIONIC VALVES

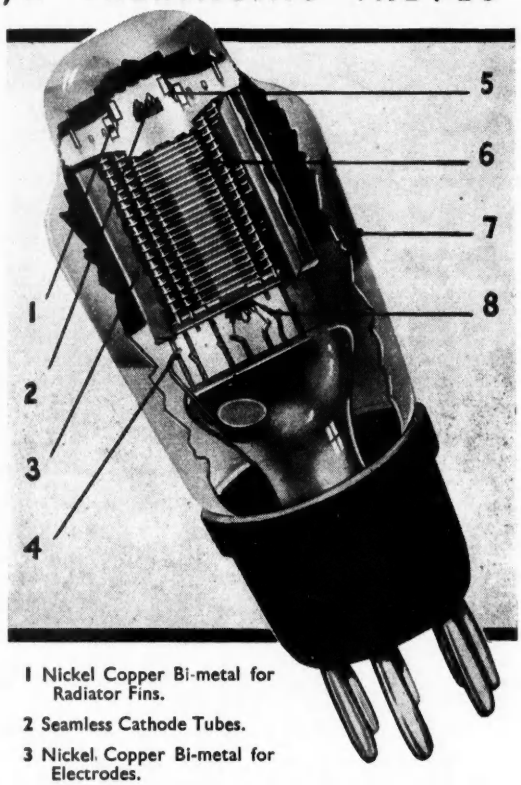

1 Nickel Copper Bi-metal for Radiator Fins.

2 Seamless Cathode Tubes.

3 Nickel Copper Bi-metal for Electrodes.

4 Mallory miniature spot welding Electrodes and Holders for assembly.

5 Mallory 3M Grid Support Wire.

6 Nickel Clad Copper Grid Support Wire.

7 Vitreous Enamel Transfers.

8 Nickel Connecting Tapes and Filament Tapes for Directly Heated Valves.

Specialised products of

Johnson Matthey & CO., LIMITED

HATTON GARDEN · LONDON · E.C.1

GD109

VIBRATION EQUIPMENT

Mullard take pleasure in announcing....

... an extension of their activities in the field of industrial electronic equipment. The Company are devoting particular attention to the many aspects of vibration diagnosis and measurement by electronic and other means, and now offer a wide range of apparatus.

★ ★ ★

This includes, by agreement, specialised equipment developed by de Havilland Propellers Limited.

Mullard

Mullard

ELECTRONIC PRODUCTS LTD.

Electronic Equipment Division

ABOYNE WORKS, ABOYNE ROAD, LONDON, S.W.17

(MI.288)

DAWE

'Q' METER

Type 622 A

AN instrument for the determination of "Q" and related R.F. measurements by resonance methods in the range 50 Kc/s. to 75 Mc/s. A special model for routine workshop use is also available.

Full technical data from :

DAWE INSTRUMENTS LTD., 130 UXBRIDGE ROAD, HANWELL, LONDON, W.7 EALING 6215

THE OSCILLOSCOPE FOR EVERY INDUSTRIAL PURPOSE.

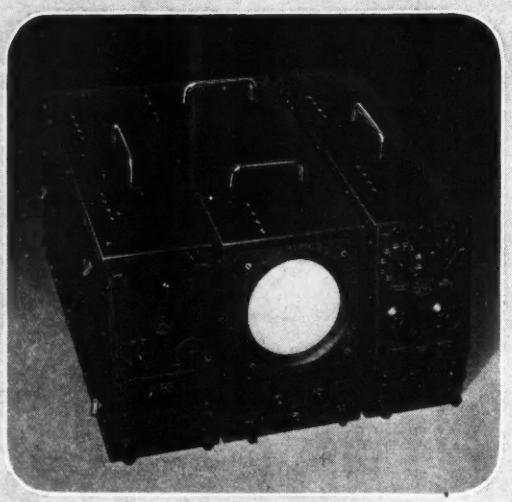

LAL UNIT *Oscilloscope*

10 Mc/s. 20 Secs. 4 μ Secs. D.C.

EVERY Oscilloscope requirement for Industrial Research or Production can be satisfied by the comprehensive range of UNIT Amplifiers and Time Bases. All instruments are immediately interchangeable without loose wires or the use of tools and many can be used independently of the Oscilloscope. Full details will be sent by return of post.

Also available :—
D.C. Amplifiers, medium and high gain. Extra low frequency time base. Circular or spiral heptode time base. Voltage calibrator.

LAL *Lydiate Ash* LABORATORIES
LYDIATE ASH · NEAR BROMSGROVE · WORCS.

MINIRACK

COMPLETE CATHODE-RAY OSCILLOGRAPH EQUIPMENTS

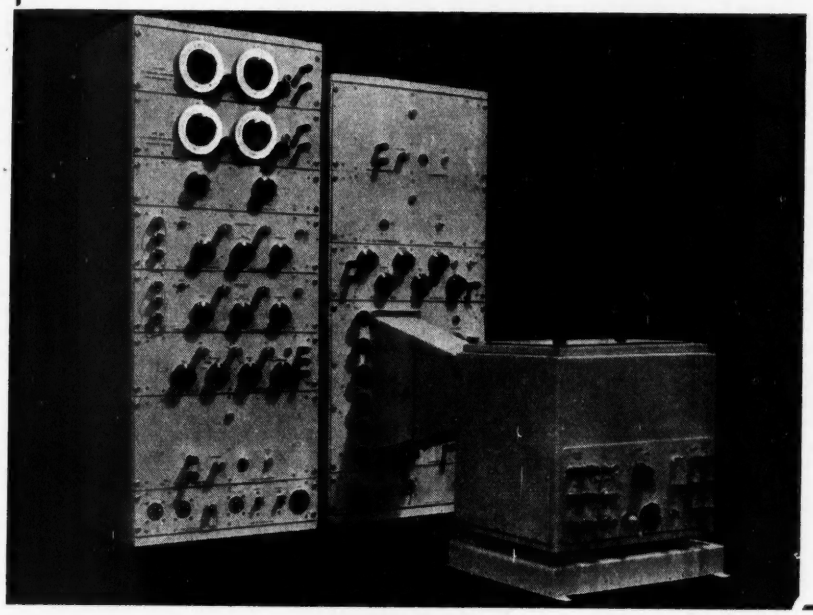

- Single and Multi-channel
- F.M. Amplifiers
- A.C. and D.C. Amplifiers
- Time-Bases
- Time-Markers
- Recording Cameras
- Pressure and Vibration pick-ups

We make a wide range of standard equipments to suit all purposes.

PLEASE WRITE FOR DETAILS

Special equipments made to meet users' requirements

SOUTHERN INSTRUMENTS
LIMITED
FERNHILL, HAWLEY
CAMBERLEY, SURREY
Phone: Camberley 1741

U.I.C

Metallized
CERAMIC
Hermetic
SEALS
★

TECHNICAL INFORMATION
BULLETIN

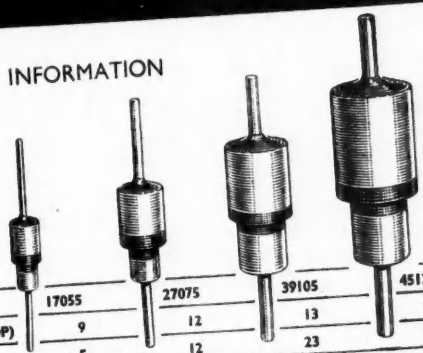

TYPE NUMBER	17055	27075	39105	45130
FLASHOVER KV DC (TOP)	9	12	13	21
MAXIMUM AMPS.	5	12	23	26



The new range of U.I.C Hermetic Seals guarantees air and moisture-tight sealing even with permanent pressure differences of up to 20 lbs. A specially developed metallizing technique ensures excellent adhesion between metal coating and ceramic body and permits soldering at temperatures between 220°C and 310°C. Full particulars of flashover voltages, current carrying capacity and behaviour at reduced pressure are available on request.

UNITED INSULATOR CO. LTD. OAKCROFT RD. TOLWORTH SURBITON SURREY
Telephone: Elmbridge 5241 (6 lines) *Telegrams: Calanel, Surbiton*

Of Interest

TO ALL ELECTRICAL AND WIRELESS ENGINEERS

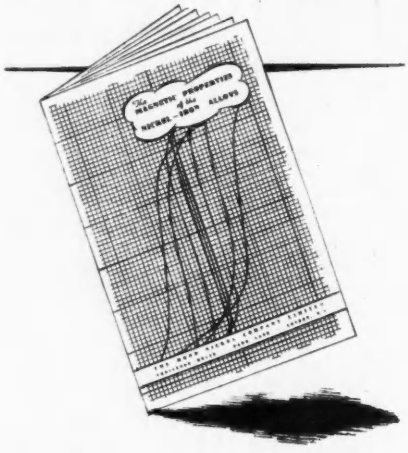

THIS BOOK dealing with the magnetic properties of the nickel-iron alloys will be sent free on request. It contains information on:

1. NON-MAGNETIC AND WEAKLY-MAGNETIC ALLOYS
Non-magnetic ferrous engineering materials — Temperature compensation alloys.

2. HIGH PERMEABILITY NICKEL-IRON ALLOYS
General and historical—Early uses: cable loading — Further development: transformers, screens, dust-cores, etc., radar, specialized alloys.

3. MAGNETOSTRICTION
General — Echo sounding — Frequency control.

4. PERMANENT MAGNETS
Development: Alni, Alnico, Alcomax—Properties —Sintered magnets—Applications—Ductile alloys.

Application should be made to:

THE MOND NICKEL COMPANY LIMITED

Sunderland House, Curzon Street, London, W.1 12/QA/3

10^{-10} amps

TELCON *Anti-Microphonic* CABLES

materially assist in the successful design of electronic instruments intended for the measurement of minute currents of the order of 10^{-10} amps. Details of this range of 'Gee' cables may be had on application.

Founded 1864

THE TELEGRAPH CONSTRUCTION & MAINTENANCE CO. LTD.

Head Office: 22 OLD BROAD ST., LONDON, E.C.2. *Tel: LONdon Wall 3141*
Enquiries to TELCON WORKS, GREENWICH, S.E.10. *Tel: GREenwich 3291*

The Greatest Advance *yet!*

100 Kc/s to 100 Mc/s
ON FUNDAMENTALS

Range: 100 *Kc/s.—100 Mc/s in 6 bands.*
Frequency: *Guaranteed within* ±1%.
Output: *Approx. 1 volt unattenuated and variable from 1 μV to 100 mV into a 75 ohm load through a matched transmission line.*
Stray Field: *Less than 3μV at 100 Mc/s.*
Illuminated Dial: *Total scale length, 30 in.*
Power Supply: 100 — 210 — 230 — 250 volts. 40-100 c/s.
Dimension: 9½ *in. high* × 13 *in. wide* × 8 *in. deep.*
Weight: 15 *lb.*

The new Advance Signal Generator, Type E.2, has all the advantages of the popular Model 1 plus a greatly extended range to cover the Birmingham Television frequencies. The wider range, 100 Kc/s. to 100 Mc/s., gives greater scope for advanced experimental work than ever before.

In common with the earlier model the new generator offers an instrument of laboratory standard at a price within the reach of moderate purses. The remarkable high frequency accuracy of ±1% extends over the whole range.

Send for fully descriptive leaflet.

Advance TYPE E2 SIGNAL GENERATOR

ADVANCE COMPONENTS LTD.,
Back Road, Shernhall Street, Walthamstow, London, E.17
Tel.: LARkswood 4366/7/8

from the range of ⊕ *instruments*

Model 44 SUBSTANDARD
MULTI-RANGE METER

A self-contained precision instrument for general laboratory use and for calibrating first grade single and multi-range meters. The accuracy on the 44 ranges is Substandard on d.c. and within ± 0.5% on a.c. These meters are made with the greatest care and have been supplied for a number of years to the leading laboratories at home and abroad.

ELECTRONIC INSTRUMENTS LTD
17 PARADISE ROAD · RICHMOND · SURREY

"VICTORIA" *at the* B·I·F

Visitors to our stand will be interested in the development of Victoria instruments during the past twelve months. New, advanced instruments and their applications will be demonstrated, and technicians will be at hand for advice on any matters relating to our products.

B.I.F. OLYMPIA
Stand No. C.52



SQUARE FLANGE METERS

4" Large Open Scale. Mirror Scale can be supplied if required.
RANGES:
A.C. From 1V-10kV
25μA-100 Amps.
D.C. From 5mV-10kV
5μA-5000 Amps.

Victoria Instruments are made uncommonly well

VICTORIA INSTRUMENTS
Proprietors: V.I C. (Bournemouth) Ltd.
MIDLAND TERRACE · LONDON · N.W.10
Telephone: ELGar 7871/2

Furzehill at your fingertips

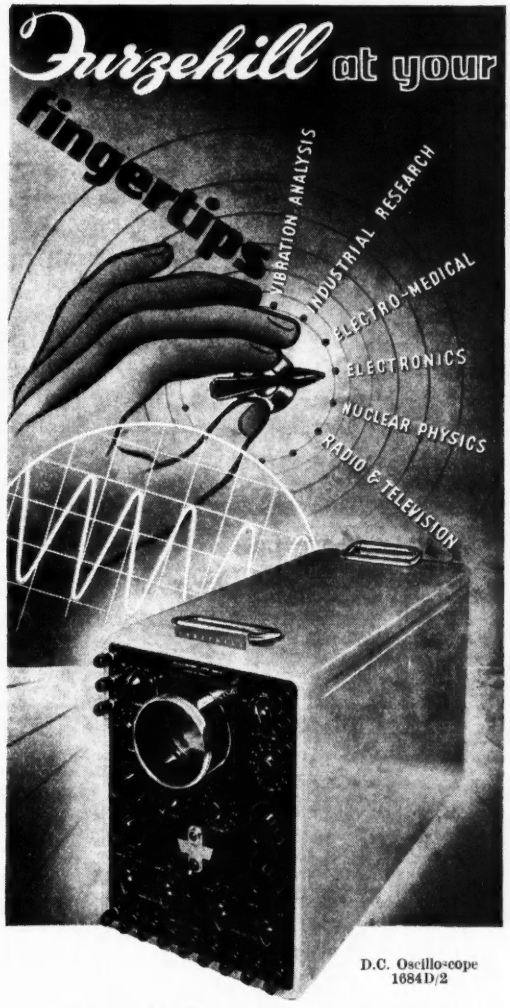

D.C. Oscilloscope
1684D/2

AN EXAMPLE from the Furzehill range of fine instruments is this high-grade oscilloscope for industrial radio and television applications. Both axes have identical d.c. coupled high sensitivity amplifiers with symmetrical inputs and a level frequency characteristic from Zero to 3 Mc/s. Particularly valuable features are the instantaneous action of the shift controls, expansion of the time-base scan from ½ to 5 screen diameters, negligible phase shift in the amplifiers and automatic amplitude-limited synchronisation.

For full details of this, and other instruments in the Furzehill range, write for our new illustrated catalogue.

Furzehill

FURZEHILL LABORATORIES LTD.,
BOREHAM WOOD, HERTS. ELStree 1137

ALL-POWER

CONSTANT VOLTAGE POWER SUPPLIES

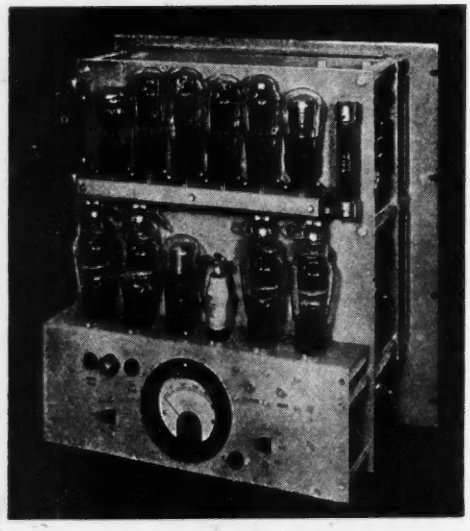

SPECIAL LABORATORY UNITS

This forward mounting Rack Unit, illustrated with cover removed, provides a constant output voltage of 300 D.C. at any current up to 600 mA. The output impedance is a fraction of an Ohm, and the residual output ripple is less than 2 mV.

This is only one of the many special Power Supply Units we are making to customers' requirements.

ALL-POWER TRANSFORMERS LTD.
Instrument Dept., Chertsey Road, Byfleet, Surrey.
Tel. Byfleet 3224-5.

TELE-RADIO (1943) LTD.

177, EDGWARE ROAD,
PADDINGTON, W.2.

	£	s.	d.
ECHOPHONE EC2 Semi-communication Receiver, 8 valves, 1 R.F. stage, B.F.O. Noise Limiter, 3 wave-bands, 550 Kc/s.-30 Mc/s. Complete with loudspeaker	20	0	0
Thrush Capacity Bridge (to clear)	8	10	0
Taylor Valve Tester, Model 45A	22	0	0
"AVO" High Resistance Meter. D.C. volts 20,000 ohms/volt. D.C. voltage range 2.5V.-2,500V. A.C. volts 1,000 ohms/volt. A.C. 10V.-2,500V.	19	10	0
"AVO" Capacity Bridge	11	0	0
New type "AVO" Signal Generator, 50 Kc/s.-80 Mc/s. 1 per cent accuracy. A.C. only	25	0	0
"AVO" Model 7 Universal Meter	19	10	0
GRAMOPHONE PICK-UPS			
Connoisseur	4	10	0
Shefi De Luxe	3	9	0
Shefi Model S	3	1	5
Rothermel Senior Crystal	3	5	0
Rothermel UI8 Crystal	1	17	6
Sound Sales Tone Control Unit TCI	9	18	0
Sound Sales 6-watt High Fidelity Amplifier, A.C. ...	13	15	0
Sound Sales Radio Feeder Unit	18	9	9
Sound Sales Non-magnetic Turntables for Collaro or Garrard Motors	1	15	0

	£	s.	d.
Sound Sales Rubber Mats, 12 in.	0	7	6
Garrard Record-Changer RC65 Lightweight High Fidelity Head. 8 records mixed (10 inch or 12 inch)	20	10	0
Garrard type "S" Gram Unit, complete with Pick-up and Auto Stop	5	19	4
Plessey Automatic Record Changer	18	9	8
Plessey Record Player, with 10-in. or 12-in. Record Selection Switch	6	18	3
Collaro Model RP49, with Pick-up Induction Motor, 100/130V. and 200/250V. A.C. Automatic Stop and Start	5	14	8
Wharfdale Golden Speaker, 3 or 15 ohms	3	15	0
Wharfdale, Cross-over Unit	3	15	0
Book on Loud Speakers by G. A. Briggs	0	5	0
Multi-Ratio Output Transformer, 5 watts 1-15 ohms SEC Type GP8	0	11	6
Type "P" 4 Ratios 5 watts	0	8	6
Universal, 6 Ratios	0	13	6

1949 Catalogue available, 9d. post free.
Shop Hours: Monday-Saturday, 9 a.m. to 5.30 p.m. Thursday, 9 a.m. to 1 p.m.

'Phone: AMB. 5393
PAD. 6116
PAD. 5606

ROLA G12

Maximum sensitivity with uniform frequency response from a more compact speaker, appreciably reduced in weight—that is what Rola technicians have achieved with the new G.12. Special features include dust-proof suspension completely protecting coil and magnet gap and the powerful Alcomax II magnet. Write for details and also for particulars of Rola 3" and 4" P.M. models, dust-proofed and equipped with Alcomax II magnets.

best of the BIG speakers

BRITISH ROLA LTD., FERRY WORKS, SUMMER RD., THAMES DITTON, SURREY

Telephone: EMBerbrook 3402 (5 lines)

Bridge without sighs. The Marconi Universal Bridge *never* disappoints. Ingenuity in design without complexity in use contributes to an impressive performance. Only one dial is required for direct L C and R measurements — cleverly co-ordinated with the range selector, it operates without risk of confusion or dependence on multiplying factors.

The Universal Bridge, type TF.868, measures inductance and capacitance — at 1,000 c/s — between 1μH and 100H or 1μμF and 100μF; the d.c. resistance range is 0.1 to 10M. Essentially for every-day use, no attempt has been made to specialise. This policy is reflected in the selling price, which unlike the instrument, is extremely conservative.

MARCONI INSTRUMENTS LTD

ST. ALBANS, HERTS. Telephone: St. Albans 6161/5

Northern Office: **30 Albion Street, Hull.** Western Office: **10 Portview Road, Avonmouth.** Southern Office & Showrooms: **109 Eaton Square, London, S.W.1.** Midland Office: **19 The Parade, Leamington Spa.**

★

This leaflet tells you all about

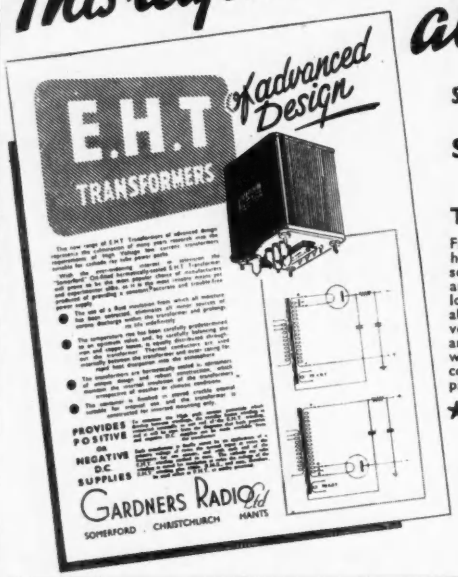

THE NEW STANDARD RANGE OF SOMERFORD **E.H.T. TRANSFORMERS**

Fluid insulation combined with hermetic sealing enable us to set a new standard of efficiency and performance in high voltage low current transformers. Available in ratings of 1000–5000 volts at 5 mA with rectifier and cathode ray tube heater windings. The most reliable component for television power packs.

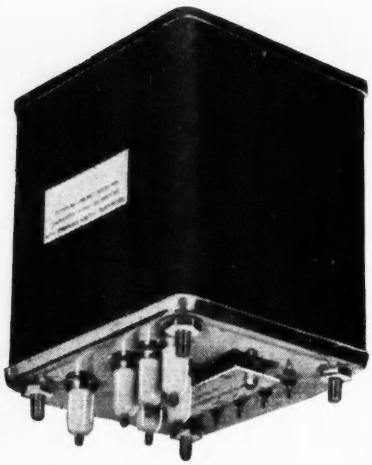

PATENT APPLIED FOR

★ *Write for the Leaflet to-day*

GARDNERS RADIO Ltd
SOMERFORD · CHRISTCHURCH · HANTS

CONSISTENTLY *Accurate*

PULLIN

Multi-Range Test Set Series 100

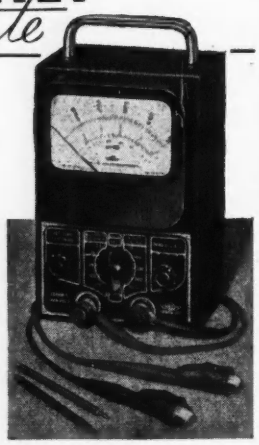

A Service Engineers' Universal Testing Set, with sensitivity of 10,000 ohms per volt. Strong metal case with carrying handle—complete with leads having detachable bull-dog clips and test prods. Ranges:

AC/DC Volts: 10, 25, 100, 250, 500 1,000.

D.C. Milliamps: 2.5, 10, 25, 100, 500.

AC/DC Microamps: 100 Microamps on the 10V range.

Resistance ranges: 0.1 Meg. (13,000 ohms mid-scale), 0/10,000 ohms (135 ohms mid-scale).

Size 9" × 5¼" × 4". **Price £10-10s.**

MP

● *We can give early deliveries—write for details :—*

Address all inquiries to:—

MEASURING INSTRUMENTS (PULLIN) LTD.

DEPT. E, ELECTRIN WORKS, WINCHESTER ST., LONDON, W.3

TELEPHONE : ACOrn 4651/3 and 4995

R·R

PRODUCTS

Transformers . Amplifiers
Electrical Control Gear
Electronic Development &
Manufacturing for Industry

●

TELEPHONE BRADFORD 24902

R.R. DEVELOPMENT LABORATORIES LTD
BARNARD RD . BRADFORD . YORKSHIRE

BEP

ELECTRONIC EQUIPMENT FOR INDUSTRY

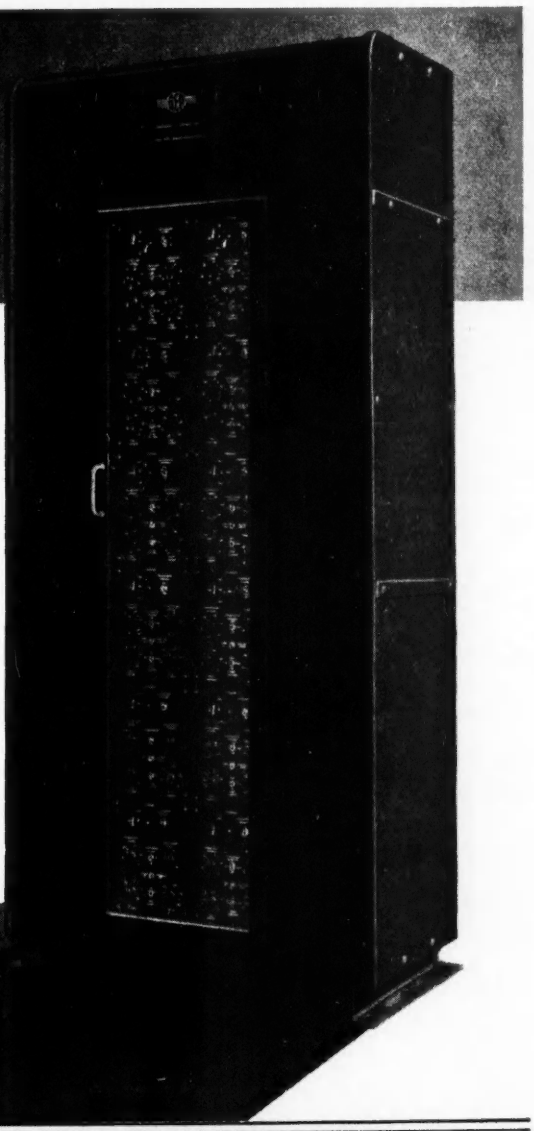

This automatic control equipment for sugar refining machinery represents one of the many installations of electronic equipment made by B.E.P. which are contributory to industrial efficiency.

The unit illustrated controls four operations on each of a battery of 12 centrifuges and, operating 24 hours a day, shows a very considerable manpower saving.

Our specialist staff of engineers will be pleased to advise you on the use of electronics in your industry.

Our standard manufactures include electronic motor control equipment regulators for voltage, current and speed, tension and register control, photoelectric equipment process times ignitron welding controls, etc.

CONSULT A SPECIALIST ORGANISATION

BRITISH ELECTRONIC PRODUCTS (1948) LTD.

Electronic Engineers to Industry.

RUGELEY STAFFS • PHONE RUGELEY 371

J.T.L.

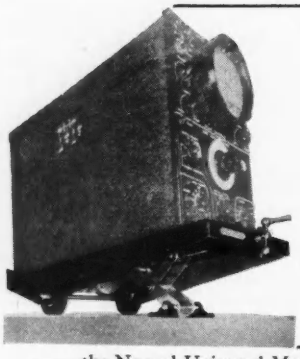

From all points of view . . .

. . . . the Nagard Universal Mounting is a " must " for Oscillograph users. With it, there are no parallax errors when viewing the CRT screen since easy vertical and horizontal movements bring the axis of the CRT to *your* viewing position. No need to improvise tilts and no straining to lift the Oscillograph.

The Nagard Universal Mounting increases accuracy of observations and adds comfort to working conditions. Suitable for all makes of portable oscillographs.

NAGARD

UNIVERSAL OSCILLOGRAPH MOUNTING

(*Patents Pending*)

Write or phone for descriptive leaflet to :

NAGARD LTD., 245, Brixton Rd., London, S.W.9.

Telephone : Brixton 3550 *Telegraphic Address : "INTERTEL, CLAPROAD, LONDON"*

"UNO"

PEN STENCILS

BIF 1949

MAY 2-13

OLYMPIA & EARLS COURT

SEE OUR EXHIBIT

Stand No. C.118/114 OLYMPIA

ASK West's advice on :

Drawing Office Equipment

Sensitized Papers

Blue Prints and Dye Line Prints

True-to-scale Prints

Surveying Equipment

We can help you from start to finish

A. WEST & PARTNERS LTD.

36 BROADWAY, WESTMINSTER, S.W.1

the 'TOPS' in TELEVISION

Aerialite Television Aerials are being installed as fast as they can be produced. Of good technical design, robust construction, and easy to get, every Aerialite aerial will give clear, sharp, steady pictures, with never a "ghost." Send for illustrated booklet giving full details.

Sell

AERIALITE TELEVISION AERIALS and EQUIPMENT

for the Pictures at Home

Made by : **AERIALITE LTD. STALYBRIDGE, CHESHIRE**

THE "FLUXITE QUINS" AT WORK

"Quick ! Look at this" shouted EE,
"A close-up on soldering, SEE?
And he's using FLUXITE!"
Cried OI "Now be bright
It's not television. IT'S ME!"

For all SOLDERING work—you need FLUXITE—the paste flux—with which even dirty metals are soldered and "tinned." For the jointing of lead—without solder ; and the " running " of white metal bearings—without " tinning " the bearing.

It is suitable for ALL METALS—excepting ALUMINIUM—and can be used with safety on ELECTRICAL and other sensitive apparatus.

With Fluxite Joints can be "wiped" successfully, that are impossible by any other method

Used for over 40 years in Government Works, and by leading Engineers and Manufacturers. OF ALL IRONMONGERS—IN TINS—10d., 1/6 and 3/-.

The "Fluxite Gun" puts Fluxite where you want it by a simple pressure. Price 1/6, or filled 2/6.

ALL MECHANICS WILL HAVE

FLUXITE

IT SIMPLIFIES *ALL* SOLDERING

Write for Leaflets on CASE HARDENING STEEL and TEMPERING TOOLS with FLUXITE also on " WIPED JOINTS." Price 1d. each.

FLUXITE LTD. (Dept. T.V.) Bermondsey St., London, S.E.1

PLAN YOUR CAREER

RADIO · TELEVISION and other INDUSTRIAL ELECTRONIC subjects

ELEMENTARY and ADVANCED COURSES

WRITE NOW FOR FREE BOOKLET summarising the careers available in Electronics and giving particulars of training courses offered by E.M.I. Institutes Ltd. Postal Courses cover such subjects as Television, Elementary and Advanced, Radio Theory and Practice, Mathematics, Electronics in Industry, etc.

Suitable special courses for those studying for City and Guilds, Brit.I.R.E., I.E.E., etc., are also available.

E.M.I. INSTITUTES

Dept. 11, 43 Grove Park Road, Chiswick, London, W.4.
Telephone : CHIswick 4417/8

E.M.I. Institutes — backed by the Electronic Organisation which includes "H.M.V.", Columbia, Marconiphone, etc E.102 B

RELIABILITY

of H.T. and E.H.T. supplies to electronic and television equipment.

FIT AND FORGET

WESTINGHOUSE

WESTALITE METAL RECTIFIERS

They ensure a steady, constant, and unfailing supply.

Write for descriptive literature and prices to **DEPT. E.E.5**

WESTINGHOUSE BRAKE & SIGNAL Co. Ltd.
82 YORK WAY, KING'S CROSS, LONDON, N.1

"ATA"

SPELLS TOP VALUE AT LOWEST COST!

For a reliable team-to-base communication you require a reliable equipment and we have it.

ANNOUNCING

A NEW MODEL 4-STAGE 1 KW. C.W. TELEGRAPH TRANSMITTER.

Frequency Coverage 3.5 to 16 Mc/s : Crystal Controlled : Output Impedance tuned to any aerial impedance between ± 20 and ± 20,000 ohms : Range up to 3,000 miles : Easy to operate. Suitable for Speed Telegraphy.

ALSO AVAILABLE

3 KW RADIO COMMUNICATION SETS.

Frequency Coverage 2 to 20 Mc/s. : Crystal Controlled

350 W TELEGRAPH TRANSMITTER and 250 W TELEPHONY RADIOCOMMUNICATION SET.

Frequency Coverage : 2 to 20 Mc/s.

Also smaller sets, receivers and transmitters ideal for amateurs.

Ask for quotation

ATA SCIENTIFIC PROGRESS LTD., 76, Warwick Square, London, S.W.1.
Tel. VICtoria 4125.

TAKES UP LESS ROOM

(N.4.J.)

Made principally of steel
Steel-preserving electrolyte
Fully enclosed active materials
Practically free from self-discharge

NIFE
STEEL BATTERIES

(N.B. Nife batteries are not yet available for private cars or domestic radio.)

NIFE BATTERIES · REDDITCH · WORCESTERSHIRE

LAMINATIONS

FOR

ALL RADIO AND ELECTRICAL USES.

IN SILICON, DYNAMO, INTERMEDIATE AND TRANSFORMER QUALITIES.

PERMALLOY, MUMETAL, RADIOMETAL.

SCREENS FOR ALL ELECTRICAL USES.

TRANSFORMER SHROUDS FOR 35 AND 74 LAMS.

GENERAL PRECISION ENGINEERS.

SHERADISING TO THE TRADE.

ELECTRICAL SOUND & TELEVISION PATENTS LTD.
12 PEMBROKE STREET, LONDON, N.1. — TERminus 4355
2/4 MANOR WAY, BOREHAM WOOD, HERTS—ELStree 2138



RELAYS AND SWITCH KEYS

LARGE EX-GOVT. STOCKS
IMMEDIATE DELIVERY

Types 600 - 3000 Relays — Also High Speed
Rotary Selector Switches, Carbon Insets, Balanced Armature Insets, Plugs, acks, Condensers, Co-Axial Cables

JACK DAVIS
Dept. E.E.
30 PERCY STREET, LONDON, W.1
Telephone : MUSeum 7960

AMBITIOUS ENGINEERS

HAVE YOU HAD *YOUR* COPY OF "ENGINEERING OPPORTUNITIES"?

Whatever your age or experience—you must read this highly informative guide to the best paid engineering posts. The handbook contains particulars of **A.M.I.C.E., A.M.I.Mech.E., A.M.I.E.E., A.M.I.M.I., A.M.Brit.I.R.E.**, and other important Engineering Examinations, and outlines home-study courses in all branches of **Civil, Mechanical, Electrical, Automobile, Radio and Aeronautical Engineering, Government Employment, Draughtsmanship, Building and Plastics, Matriculation, etc.**

We Guarantee
"NO PASS — NO FEE"

If you are earning less than £10 a week you cannot afford to miss reading **"Engineering Opportunities."** It tells you everything you want to know to secure your future. Write for this enlightening guide to well paid posts **NOW—FREE** and without obligation.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY
337A, Shakespeare House, 17/19, Stratford Place, London, W.1

WE OFFER

A large range of used and new Test Equipment, Converters, Recorders, Amplifiers, Motors, Transformers, etc.

All guaranteed and at very attractive prices.

We buy good modern used equipment of all types for spot cash.

UNIVERSITY RADIO LTD.
22 LISLE STREET, LONDON, W.C.2.
Tel. GER 4447 and GER 8582.

Electronic ACCESSORIES & COMPONENTS

H H

For Research Depts., Laboratories, Colleges, etc. *Send for List.*

HOLIDAY & HEMMERDINGER LTD
74-78, HARDMAN ST., DEANSGATE
MANCHESTER 3 · TEL. DEA. 4121/2

L.T.P. REWIND SERVICE

All rewinds are Layer Wound, Vacuum Impregnated, Pressure tested at 2,000 volts and guaranteed for three months.

48 hour service.

Enquiries :

London Transformer Products Ltd.
L.T.P. Works, Cobbold Estate, Willesden, London, N.W.10
Telephone WILlesden 6486

D.C. AMPLIFIERS

High gain (1,000,000 times) low noise level

Stabilized against mains supply variations and internal drift

THE WALLANDER CO.
3, MEAL MARKET, HEXHAM - ON - TYNE.



Midget Relay ML/C.

RELAYS

For A.C. and D.C.

Multiple-contact heavy duty Relays. Sensitive Relays, measuring and impulse Relays, mercury switch Relays, time delay Relays, photo-electric Relays.

Ask for leaflets RE/EO

LONDEX LTD.
Manufacturers of Relays
207 Anerley Rd. London, S.E.20 SYDenham 6258

LINE OUTPUT TRANSFORMERS and FOCUS COILS

from stock, tested and approved for use in **Electronic Engineering Televisor**
36/- each
WALPOLE NORMAN ENGINEERING Co. Ltd.
33, Montpelier Vale, Blackheath, London, S.E.3.

W.D. TELEVISION RECEIVER

WE INVITE YOU TO CALL ANY DAY

during television transmitting time, to see this excellent little receiver working. You can make this from Government surplus radar equipment. Send **7/6** without delay for the easy-to-follow instructional data. All components are available ex stock again, but

ORDER WITHOUT DELAY

W.D. SALES
10, Electron House, Windmill Hill, Ruislip Manor, Middx.

MODERN SERVICING METHOD

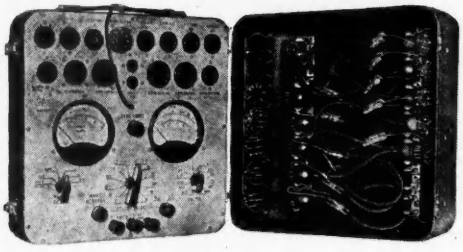

The "L.S.L." Servicing Method is a combined fault analyser and circuit tester; simultaneously capable of indicating all voltage, current and resistance on each valve electrode without removing the chassis from the cabinet. Readings can be taken whilst the set is under actual operating conditions. The "L.S.L." Analyser is a combination of multi-range instrument and valve tester.

PRICE : £18 . 18 . 0 Subject.

THE "LSL" PORTABLE ANALYSER

★ *Saves time and trouble.* ★ *Greatly increases Profit in the Service Department.* ★ *Is portable, can be used on the bench or in the home.* ★ *Is simple to operate.*

Send for further particulars from the sole distributors:

Kerry's (GREAT BRITAIN) Limited

WARTON ROAD, STRATFORD, LONDON, E.15,
Telephone: Maryland 6611 AND BRANCHES
Export Address: 23-26 St. DUNSTANS HILL, E.C.3

Only with CO-AX R.F. CABLES

AIR-SPACED ARTICULATED

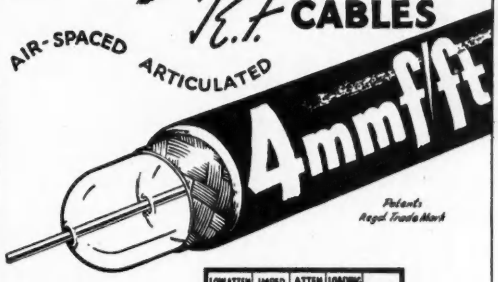

THE LOWEST EVER CAPACITANCE OR ATTENUATION

IMMEDIATE DELIVERIES FOR HOME & EXPORT

Write or cable for data sheets or deliveries to the Originators of Flexible air spaced R.F. Cables.

LOW ATTEN TYPES.	IMPED OHMS	ATTEN. db/100ft at 100 Mc/s	LOADING mmf/ft	O.D."	
A 1	74	1.7	0.11	0.36	HIGH POWER FLEXIBLE
A 2	74	1.3	0.24	0.44	
A34	73	0.6	1.5	0.88	
LOW CAPAC TYPES.	**CAPAC mmf/ft**	**IMPED. OHMS.**	**ATTEN. db/100ft 100Mc/s**	**O.D."**	
C 1	7.3	150	2.5	0.36	PHOTOCELL CABLE
P.C.1	10.2	132	3.1	0.36	
C 11	6.3	173	3.2	0.36	
C 2	6.3	171	2.15	0.44	
C22	5.5	184	2.8	0.44	
C 3	5.4	197	1.9	0.64	
C33	4.8	220	2.4	0.64	VERY LOW CAPACITANCE
C44	4.1	252	2.1	1.03	

TRANSRADIO LTD.
CONTRACTORS TO H.M. GOVERNMENT
138A CROMWELL ROAD, LONDON, S.W.7
Cables: TRANSRAD, LONDON

5 SOLON MODELS

SOLON electric soldering irons have proved their capacity for continuous service under the most exacting conditions. 5 models; 240 watt oval tapered bit; 125 watt oval tapered and round pencil bits and 65 watt oval tapered and round pencil bits. Each model complete with 6 feet of Henley 3-core flexible. Now available from stock. Write for folder Y.10.

W. T. HENLEY'S TELEGRAPH WORKS CO. LTD.
51-53 Hatton Garden, London, E.C.1

HENLEY SOLON ELECTRIC SOLDERING IRONS

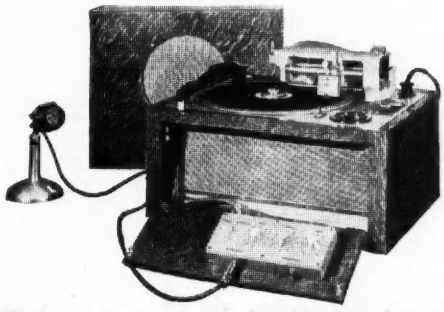

BROWN - E.R.D. 13 inch Portable Disc Recorder

An important S. G. Brown product

Brown - E.R.D.

DISC RECORDER

Incorporating the latest advances in Sound-on-Disc Recording

Write for interesting brochures presenting full technical details of this latest development in Sound-on-Disc recording. Also 17 inch models for the Professional user.

S. G. BROWN, LTD., *Shakespeare St.,* **WATFORD**

Established in Electro Acoustics and high precision Engineering for over 40 years. Manufacturers of the world-famous 'BROWN' Gyro Compass.

Telephone: WATFORD 7241.

EUREKA
REGD.
& NICKEL-CHROME
RESISTANCE WIRES & TAPES
ALSO
MOLYBDENUM
WIRES, TAPES & RODS
for
ELECTRIC FURNACES
LAMPS & VALVES

and

VAC-STEEL
PLATINUM CLAD
GAS-FREE NICKEL
WIRES : TAPES : BARS & MESH

EXACT TO SPECIFICATION

LET US QUOTE YOU

VACTITE WIRE COMPANY
VACTITE
—REGD.—
LIMITED

75, ST. SIMON STREET,
SALFORD, 3, LANCS.

Telephone : BLACKFRIARS 9831
Telegrams : VACTITE, SALFORD

INDEX TO ADVERTISERS

Advance Components Ltd.	26
Aerialite Ltd.	32
All-Power Transformers Ltd.	28
A.T.A. Scientific Progress Ltd.	33
Automatic Coil Winder & Electrical Equipment Co., Ltd.	17
Baldwin Instrument Co., Ltd.	20
Belling & Lee Ltd.	5
British Electronic Products Ltd.	31
British Institute of Engineering Technology	34
British Insulated Callender's Cables Ltd.	14
British Rola Ltd.	29
British Thomson-Houston Co., Ltd.	13
Brown Ltd., S. G.	35
Chapman & Hall Ltd.	189
Cinema-Television Ltd.	16
Davis, Jack	34
Dawe Instruments Ltd.	24
De La Rue & Co., Ltd., Thomas	22
Edison Swan Electric Co., Ltd.	8 & 9
Edwards & Co. (London) Ltd., W.	20
Electrical Sound & Television Patents Ltd.	34
Electronic Instruments Ltd.	27
E.M.I. Institutes Ltd.	33
Erie Resistor Ltd.	Cover iv
Ferranti Ltd.	Cover iii
Fluxite Ltd.	32
Fox Ltd., P. X.	21
Furzehill Laboratories Ltd.	27
Gardners Radio Ltd.	30
Henley's Telegraph Works Co., Ltd., W. T.	35
Holiday & Hemmerdinger Ltd.	34
Johnson Matthey & Co., Ltd.	23
Kerry's (Great Britain) Ltd.	35
Lewis & Co., Ltd., H. K.	189
Londex Ltd.	34
London Transformer Products Ltd.	34
Lydiate Ash Laboratories	24
Marconi Instruments Ltd.	29
Marconi's Wireless Telegraph Co., Ltd.	19
Measuring Instruments (Pullin) Ltd.	30
Melton Metallurgical Laboratories Ltd.	188
Modern Book Co.	188
Mond Nickel Co., Ltd.	26
Muirhead & Co., Ltd.	7
Mullard Electronic Products Ltd.	18 & 23
Nagard Ltd.	32
Nife Batteries	33
Painton & Co., Ltd.	19
R.R. Development Laboratories Ltd.	30
Rubber Bonders Ltd.	11
Salford Electrical Instruments Ltd.	12
Southern Instruments Ltd.	25
Standard Telephones & Cables Ltd.	6
Steatite & Porcelain Products Ltd.	10
Sullivan, Ltd., H. W.	21
Taylor Electrical Instruments Ltd.	Cover i
Taylor Tunnicliff (Refractories) Ltd.	36
Telegraph Construction & Maintenance Co., Ltd., The	26
Tele-Radio (1943) Ltd.	28
Transradio Ltd.	35
Tufnol Ltd.	3
United Insulator Co., Ltd.	25
University Radio Ltd.	34
Vactite Wire Co., Ltd.	36
Victoria Instruments	27
Vortexion Ltd.	Cover ii
Wallander Co., The	34
Walpole Norman Engineering Co., Ltd.	34
Walter Instruments Ltd.	15
W.D. Sales	34
West & Partners Ltd., A.	32
Westinghouse Brake & Signal Co., Ltd.	33
Wiggin & Co., Ltd., Henry	22

LOW LOSS CERAMICS

Success through constant research

CAN WE HELP YOU?
Please ask for pamphlets R.T.1 and R.T.2

PROMPT DELIVERY

TAYLOR TUNNICLIFF
(REFRACTORIES) LTD.
Albion Works, Longton, Stoke-on-Trent, Staffs.
London Office :
125 High Holborn, W.C.1
'Phones : Stoke-on-Trent 5272 and Holborn 1951

T.A.S./T.T.78

Now available, the new Ferranti Television tube

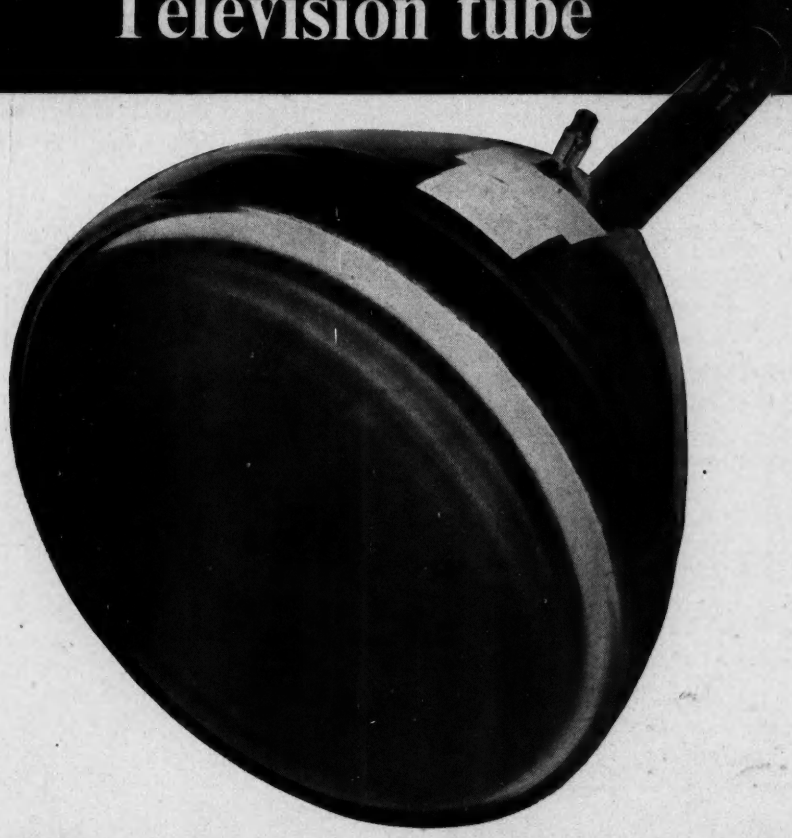

Our new T 12/46 12" Television Tube (above) upholds the Ferranti tradition of reliability in radio engineering. The screen is specially flat, and gives a bright, pleasantly coloured image. Improved design ensures long life and complete elimination of ion spots, while the electron gun assembly produces a finely-focused spot for clear definition.

FERRANTI

Ferranti cathode ray tubes

FERRANTI LTD. MOSTON MANCHESTER 10; and 36 KINGSWAY LONDON WC2

RESISTOR LTD | DIODE FILTER | SKC 2201

ERIE COMBINED COMPONENTS

The latest Erie development is a series of "Combined Components" comprising two condensers and a resistor of standard types and long proven high quality, contained in a tube no longer than would normally embody a single condenser. This means that within the limits of the range of the condensers and the resistor, any circuit normally employing two condensers and a resistor, can be combined in one unit with economy in space and labour, and with more efficient screening than can normally be provided by separate assembly. The drawing shows a Diode Filter, but other combinations such as R. C. Coupling or Decoupling units and Auto Bias units will readily suggest themselves to the designer.

Manufacturers are invited to enquire for further details.

DIODE FILTER. SKC 2201

Resistor element: 33 ohms to 10 meg. ± 5%, 10%, 20%

*Condenser element: 30 pf. to 100 pf. — 20%

Length: 11/16 inches

Diameter: 3/16 inches

* Using standard dielectric P.F. < 0·15%

ERIE RESISTOR LTD.
Carlisle Road, The Hyde,
London, N.W.9 England.
Telephone: COLindale 8011

FACTORIES: LONDON AND GT. YARMOUTH
TORONTO, CANADA. ERIE. PA., U.S.A.

Printed in Great Britain by The Press at Coombelands, Ltd., Addlestone, Surrey, for the Proprietors, Morgan Brothers (Publishers) Ltd., 28, Essex Street, Strand, W.C.2.
Registered for Transmission by Canadian Magazine Post

949

nd, W.C.2.